




OIL ANALYSIS REPORT

Sample Rating Trend

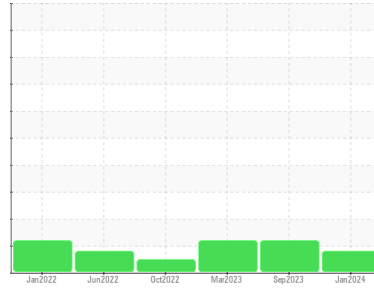

FUEL



Machine Id
9907

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

▲ Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0810317	WC0844988	WC0790530
Sample Date	Client Info	09 Jan 2024	08 Sep 2023	23 Mar 2023
Machine Age	mls	365664	360242	354801
Oil Age	mls	0	0	0
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		MARGINAL	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	3	13	14
Chromium	ppm ASTM D5185m >20	<1	1	<1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	0	<1	<1
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	2	2	0
Lead	ppm ASTM D5185m >40	0	16	17
Copper	ppm ASTM D5185m >330	<1	3	3
Tin	ppm ASTM D5185m >15	0	<1	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	67	18	18
Barium	ppm ASTM D5185m 10	3	2	2
Molybdenum	ppm ASTM D5185m 100	64	71	67
Manganese	ppm ASTM D5185m	0	<1	<1
Magnesium	ppm ASTM D5185m 450	335	389	360
Calcium	ppm ASTM D5185m 3000	1638	1731	1658
Phosphorus	ppm ASTM D5185m 1150	970	1034	959
Zinc	ppm ASTM D5185m 1350	1147	1246	1165
Sulfur	ppm ASTM D5185m 4250	3710	3397	3146

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	10	10
Sodium	ppm ASTM D5185m >158	1	4	0
Potassium	ppm ASTM D5185m >20	2	<1	1
Fuel	% ASTM D3524 >5	▲ 4.7	▲ 5.8	▲ 6.0

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.1	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	7.2	10.3	10.1
Sulfation	Abs/.1mm *ASTM D7415 >30	19.2	21.3	20.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.5	19.4	19.5
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.9	7.1	5.7







OIL ANALYSIS REPORT

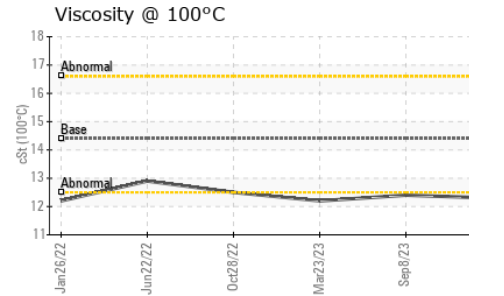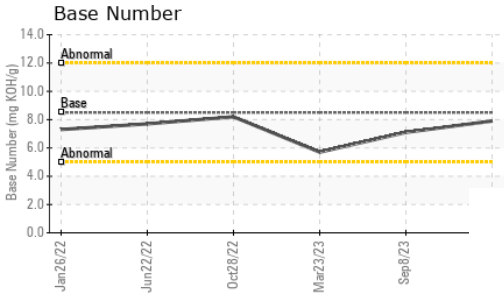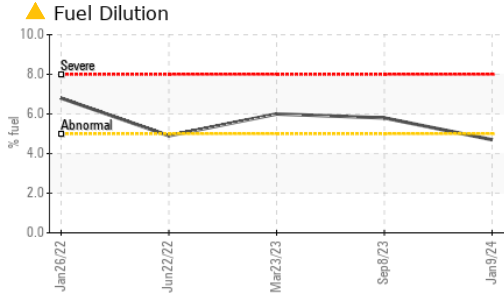

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	12.3	▲ 12.4	▲ 12.2

GRAPHS

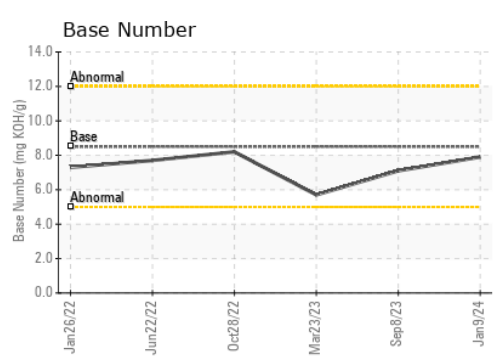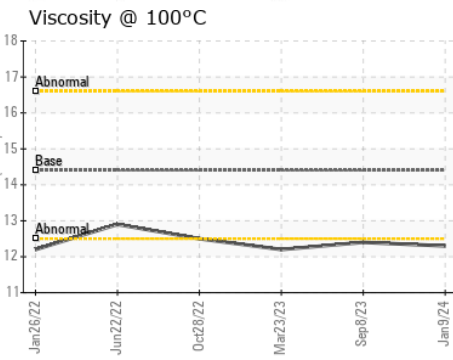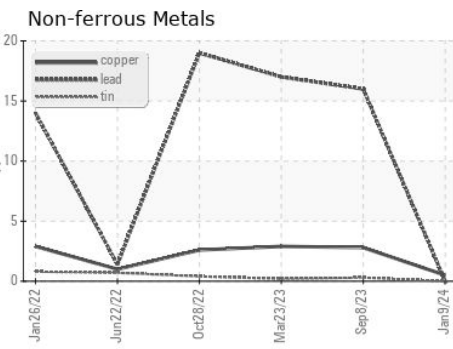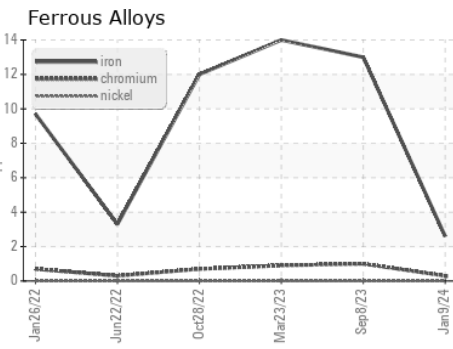

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0810317 **Received** : 18 Jan 2024
Lab Number : 06064119 **Diagnosed** : 19 Jan 2024
Unique Number : 10835501 **Diagnostician** : Wes Davis
Test Package : FLEET (Additional Tests: PercentFuel)

TOWN OF CHAPEL HILL
 6900 MILLHOUSE RD
 CHAPEL HILL, NC
 US 27516
 Contact: Lisa DePasqua
 ldepasqua@townofchapelhill.org
 T: (919)696-4941
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)