




OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

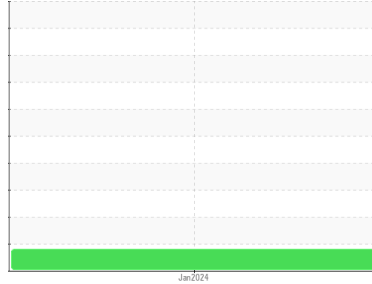

Machine Id
MACK 235091
 Component
Diesel Engine
 Fluid
 {not provided} (--- QTS)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

Fuel content negligible. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. Test for glycol is negative.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		LF0001603	---	---
Sample Date	Client Info		15 Jan 2024	---	---
Machine Age	mls	Client Info	40525	---	---
Oil Age	mls	Client Info	0	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			MARGINAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>120	67	---
Chromium	ppm	ASTM D5185m	>20	<1	---
Nickel	ppm	ASTM D5185m	>5	2	---
Titanium	ppm	ASTM D5185m	>2	0	---
Silver	ppm	ASTM D5185m	>2	0	---
Aluminum	ppm	ASTM D5185m	>20	33	---
Lead	ppm	ASTM D5185m	>40	<1	---
Copper	ppm	ASTM D5185m	>330	▲ 295	---
Tin	ppm	ASTM D5185m	>15	4	---
Vanadium	ppm	ASTM D5185m		0	---
Cadmium	ppm	ASTM D5185m		0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		53	---
Barium	ppm	ASTM D5185m		4	---
Molybdenum	ppm	ASTM D5185m		112	---
Manganese	ppm	ASTM D5185m		4	---
Magnesium	ppm	ASTM D5185m		605	---
Calcium	ppm	ASTM D5185m		1564	---
Phosphorus	ppm	ASTM D5185m		710	---
Zinc	ppm	ASTM D5185m		856	---
Sulfur	ppm	ASTM D5185m		2344	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	51	---
Sodium	ppm	ASTM D5185m		<1	---
Potassium	ppm	ASTM D5185m	>20	86	---
Fuel	%	ASTM D3524	>3.0	0.8	---

INFRA-RED


	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>4	0.6	---
Nitration	Abs/cm	*ASTM D7624	>20	12.8	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.2	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.2	---
Base Number (BN)	mg KOH/g	ASTM D2896		5.7	---




OIL ANALYSIS REPORT

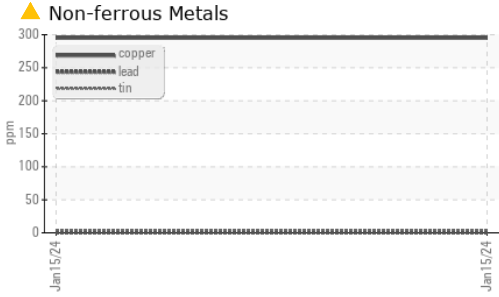










VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

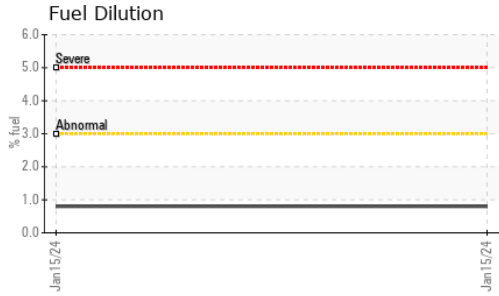

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	10.3	---	---

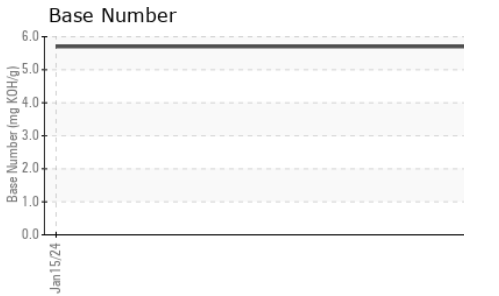

GRAPHS

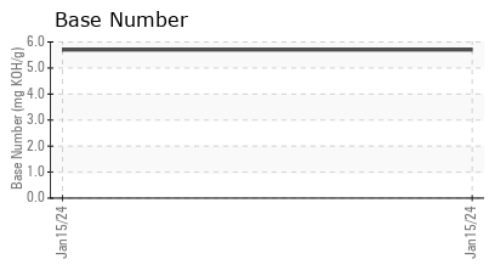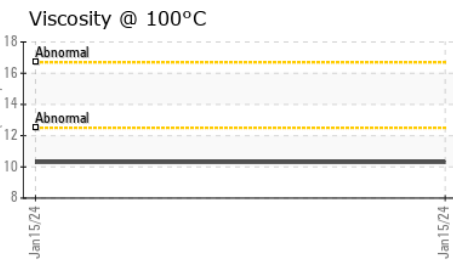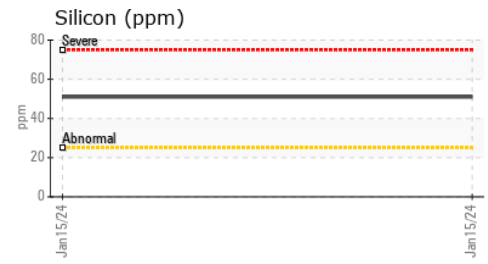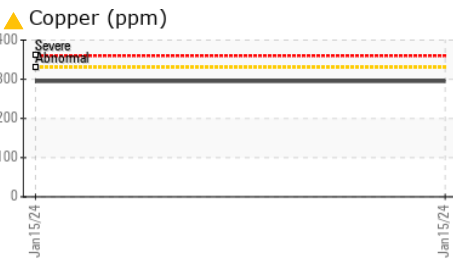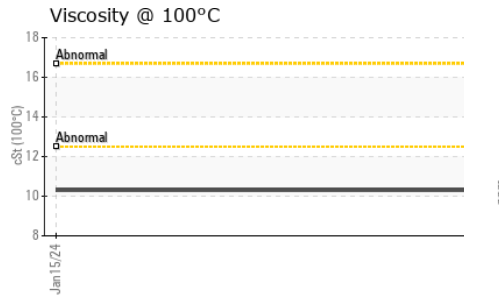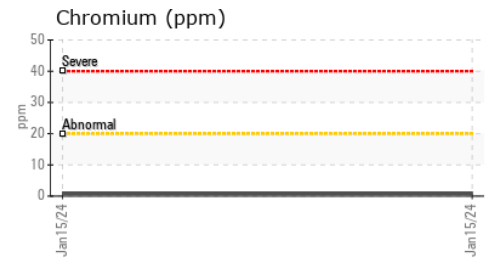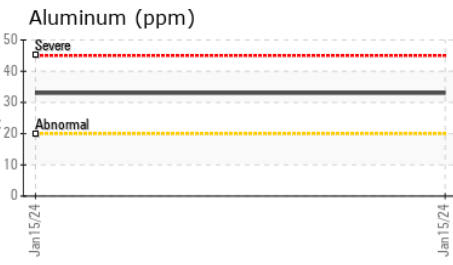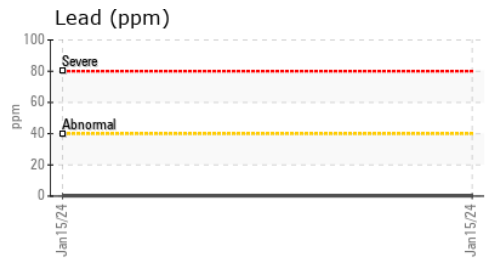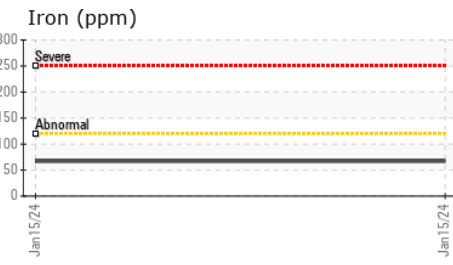

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LF0001603 **Received** : 18 Jan 2024
Lab Number : 06064132 **Diagnosed** : 24 Jan 2024
Unique Number : 10835514 **Diagnostician** : Doug Bogart
Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

NEXTRAN TRUCK CENTERS
 1414 SHILOH RD
 KENNESAW, GA
 US 30144
 Contact: D ATTY
 DATTY@NEXTRANUSA.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: