



OIL ANALYSIS REPORT

Sample Rating Trend


ISO



Machine Id
NISSEI B-02 - S22212019K1

Component
Hydraulic System

Fluid
AW HYDRAULIC OIL ISO 46 (164 GAL)

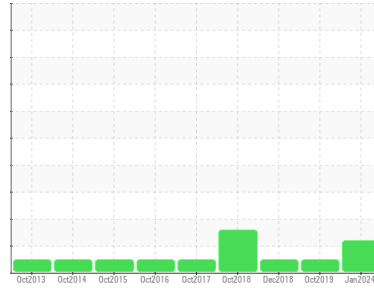

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. The system cleanliness is above the acceptable limit for the target ISO 4406 cleanliness code.

Fluid Condition

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0819534	WCI2335684	WCI2335689
Sample Date	Client Info	17 Jan 2024	16 Oct 2019	27 Dec 2018
Machine Age	yrs Client Info	0	0	0
Oil Age	yrs Client Info	0	0	0
Oil Changed	Client Info	N/A	N/A	N/A
Sample Status		ABNORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	0	<1	<1
Chromium	ppm ASTM D5185m >20	0	0	<1
Nickel	ppm ASTM D5185m >20	0	0	0
Titanium	ppm ASTM D5185m	0	0	<1
Silver	ppm ASTM D5185m	0	0	0
Aluminum	ppm ASTM D5185m >20	0	0	<1
Lead	ppm ASTM D5185m >20	<1	0	<1
Copper	ppm ASTM D5185m >20	11	9	9
Tin	ppm ASTM D5185m >20	<1	0	<1
Antimony	ppm ASTM D5185m	---	0	0
Vanadium	ppm ASTM D5185m	0	0	<1
Cadmium	ppm ASTM D5185m	0	<1	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	0	0	<1
Barium	ppm ASTM D5185m 5	7	10	0
Molybdenum	ppm ASTM D5185m 5	0	0	<1
Manganese	ppm ASTM D5185m	<1	0	0
Magnesium	ppm ASTM D5185m 25	3	1	0
Calcium	ppm ASTM D5185m 200	38	40	40
Phosphorus	ppm ASTM D5185m 300	318	306	296
Zinc	ppm ASTM D5185m 370	341	333	325
Sulfur	ppm ASTM D5185m 2500	1495	1238	1579

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<1	<1	<1
Sodium	ppm ASTM D5185m	0	<1	0
Potassium	ppm ASTM D5185m >20	0	2	0


FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >2500	▲ 2771	328	535
Particles >6µm	ASTM D7647 >320	▲ 692	104	94
Particles >14µm	ASTM D7647 >80	28	14	7
Particles >21µm	ASTM D7647 >20	4	5	2
Particles >38µm	ASTM D7647 >4	0	2	0
Particles >71µm	ASTM D7647 >3	0	0	0
Oil Cleanliness	ISO 4406 (c) >18/15/13	▲ 19/17/12	16/14/11	16/14/10




OIL ANALYSIS REPORT


Particle Trend

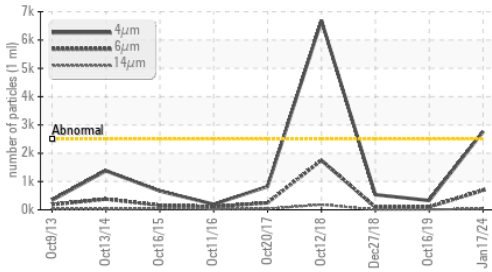


Particle Trend

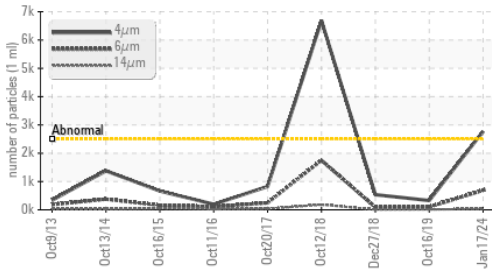

Acid Number

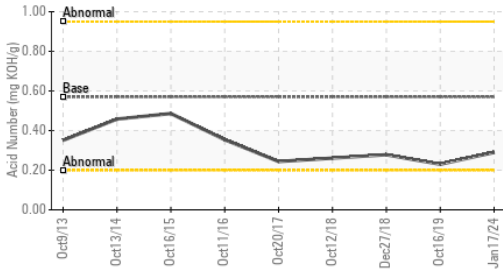

Viscosity @ 40°C

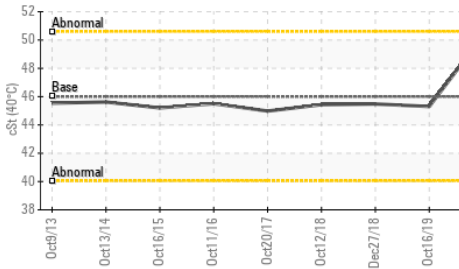

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.29	0.230	0.278

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	50.3	45.3	45.48

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color




Bottom




GRAPHS


Ferrous Alloys

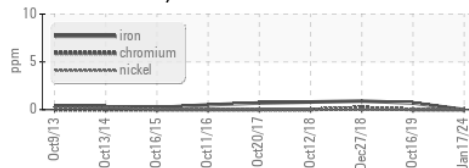


Non-ferrous Metals

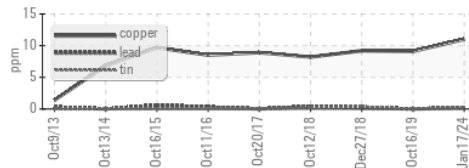

Viscosity @ 40°C

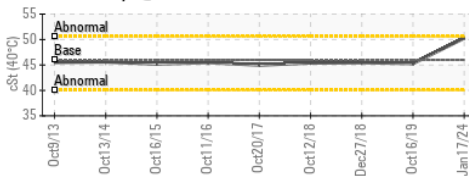

Particle Count

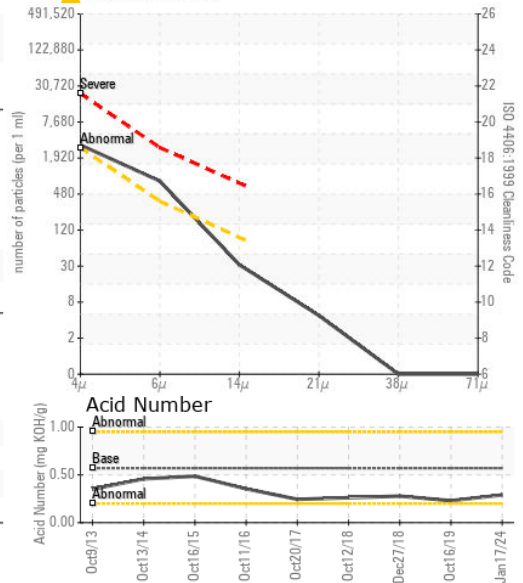

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0819534 Recieved : 18 Jan 2024
 Lab Number : 06064262 Diagnosed : 19 Jan 2024
 Unique Number : 10835644 Diagnostician : Wes Davis
 Test Package : IND 2

NIAGARA PLASTICS - CAPPLUGS
 7090 EDINBORO RD
 ERIE, PA
 US 16509
 Contact: JOE SANDERS
 joe.sanders@caplugs.com
 T: (814)868-3671 x:5131
 F: (814)868-9875

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)