


# **OIL ANALYSIS REPORT**

Sample Rating Trend



**NORMAL** 



# NISSEI A-15 (S/N S13611011K1)

**Hydraulic System** 

**AW HYDRAULIC OIL ISO 46 (248 GAL)** 

	$I \wedge I$	$\sim N$	-	C)	ю
D	VA\	OIL)	$\sim$	O	o

## Recommendation

Resample at the next service interval to monitor.

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the component. The amount and size of particulates present in the system is acceptable.

## **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	0c2014						
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2	
Sample Number		Client Info		WC0819573	WCI2335497	WCI2335627	
Sample Date		Client Info		17 Jan 2024	18 Oct 2019	29 Oct 2018	
Machine Age	yrs	Client Info		0	0	0	
Oil Age	yrs	Client Info		0	0	0	
Oil Changed		Client Info		N/A	N/A	N/A	
Sample Status				NORMAL	NORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2	
Water		WC Method	>0.05	NEG	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>20	<1	<1	<1	
Chromium	ppm	ASTM D5185m	>20	0	0	0	
Nickel	ppm	ASTM D5185m	>20	0	<1	0	
Titanium	ppm	ASTM D5185m		0	0	0	
Silver	ppm	ASTM D5185m		0	<1	0	
Aluminum	ppm	ASTM D5185m	>20	0	0	0	
Lead	ppm	ASTM D5185m	>20	<1	<1	1	
Copper	ppm	ASTM D5185m	>20	15	13	10	
Tin	ppm	ASTM D5185m	>20	<1	0	<1	
Antimony	ppm	ASTM D5185m			0	0	
Vanadium	ppm	ASTM D5185m		0	0	0	
Cadmium	ppm	ASTM D5185m		0	0	0	
ADDITIVES		method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	5	0	0	<1	
Barium	ppm	ASTM D5185m	5	5	7	6	
Molybdenum	ppm	ASTM D5185m	5	0	0	0	
Manganese	ppm	ASTM D5185m		<1	0	<1	
Magnesium	ppm	ASTM D5185m	25	1	<1	<1	
Calcium	ppm	ASTM D5185m	200	52	54	53	
Phosphorus	ppm	ASTM D5185m	300	275	240	226	
Zinc	ppm	ASTM D5185m	370	299	253	245	
Sulfur	ppm	ASTM D5185m	2500	1380	1139	1791	
CONTAMINANTS	3	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>15	<1	<1	<1	
Sodium	ppm	ASTM D5185m		0	<1	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	<1	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2	
Particles >4µm		ASTM D7647	>5000	2124	1549	1810	
Particles >6µm		ASTM D7647	>1300	419	472	496	
Particles >14µm		ASTM D7647	>160	20	86	38	
Particles >21µm		ASTM D7647	>40	5	44	8	
Particles >38µm		ASTM D7647	>10	0	9	0	
Particles >71µm		ASTM D7647	>3	0	0	0	
0'' 0' ''							

ISO 4406 (c) >19/17/14

Oil Cleanliness


18/16/14

18/16/11

18/16/12



## OIL ANALYSIS REPORT

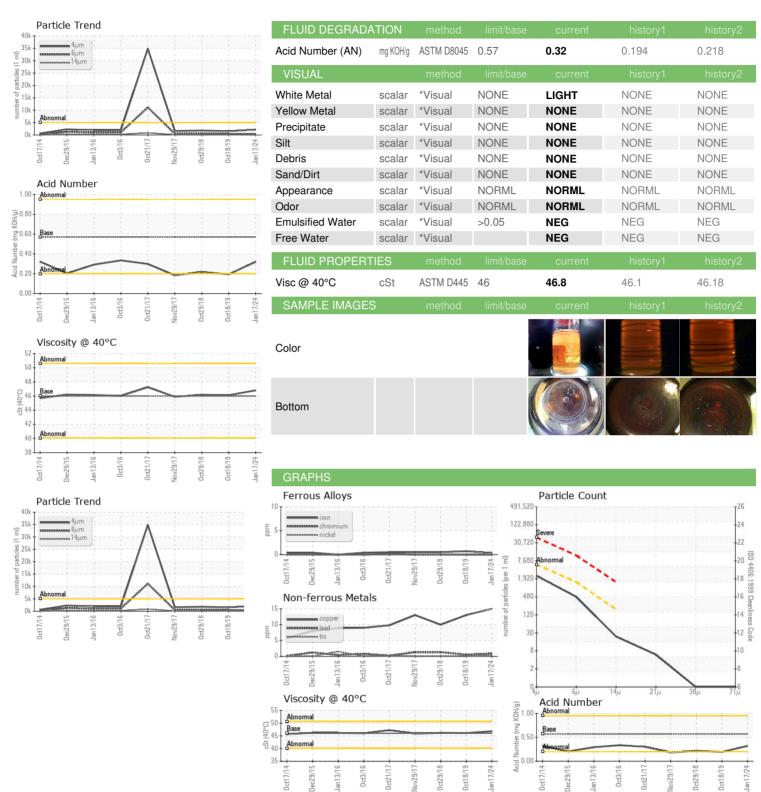





Laboratory Sample No. Lab Number **Unique Number** Test Package

: WC0819573 : 06064272 : 10835654 : IND 2

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved : 18 Jan 2024 : 21 Jan 2024 Diagnosed

Diagnostician : Don Baldridge

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**NIAGARA PLASTICS - CAPLUGS** 

7090 EDINBORO RD ERIE, PA

US 16509 Contact: JOE SANDERS joe.sanders@caplugs.com T: (814)868-3671 x:5131

F: (814)868-9875