



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Machine Id  
**ARBURG C-09 - 221114**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0883610</b>	---	---
Sample Date	Client Info	<b>17 Jan 2024</b>	---	---
Machine Age	yrs Client Info	<b>0</b>	---	---
Oil Age	yrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	<b>1</b>	---	---
Chromium	ppm ASTM D5185m >20	<b>0</b>	---	---
Nickel	ppm ASTM D5185m >20	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >20	<b>0</b>	---	---
Lead	ppm ASTM D5185m >20	<b>0</b>	---	---
Copper	ppm ASTM D5185m >20	<b>2</b>	---	---
Tin	ppm ASTM D5185m >20	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	<b>0</b>	---	---
Barium	ppm ASTM D5185m 5	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m 5	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m 25	<b>30</b>	---	---
Calcium	ppm ASTM D5185m 200	<b>63</b>	---	---
Phosphorus	ppm ASTM D5185m 300	<b>532</b>	---	---
Zinc	ppm ASTM D5185m 370	<b>668</b>	---	---
Sulfur	ppm ASTM D5185m 2500	<b>1522</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<b>&lt;1</b>	---	---
Sodium	ppm ASTM D5185m	<b>2</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>0</b>	---	---

## FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >2500	<b>2433</b>	---	---
Particles >6µm	ASTM D7647 >320	<b>▲ 680</b>	---	---
Particles >14µm	ASTM D7647 >80	<b>45</b>	---	---
Particles >21µm	ASTM D7647 >20	<b>12</b>	---	---
Particles >38µm	ASTM D7647 >4	<b>2</b>	---	---
Particles >71µm	ASTM D7647 >3	<b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c) >18/15/13	<b>▲ 18/17/13</b>	---	---


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.57	<b>0.59</b>	---	---




# OIL ANALYSIS REPORT


### ▲ Particle Trend

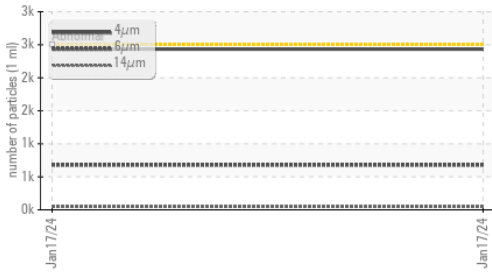


### ▲ Particle Trend

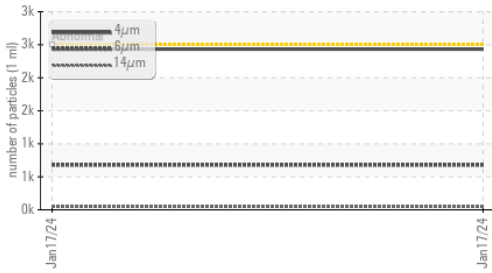

### Acid Number

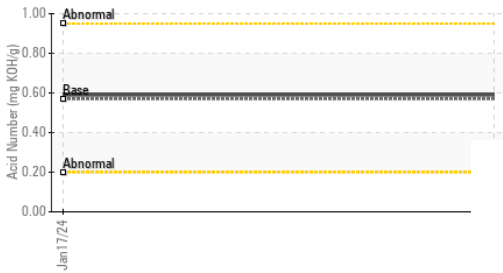

### Viscosity @ 40°C

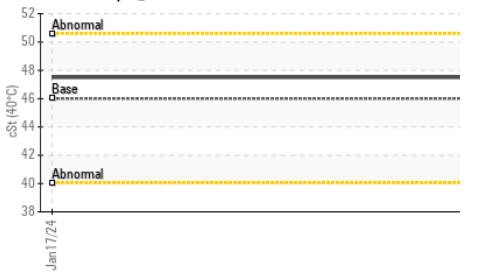






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.05	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	<b>47.5</b>	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

### GRAPHS

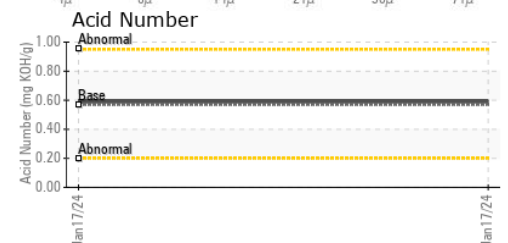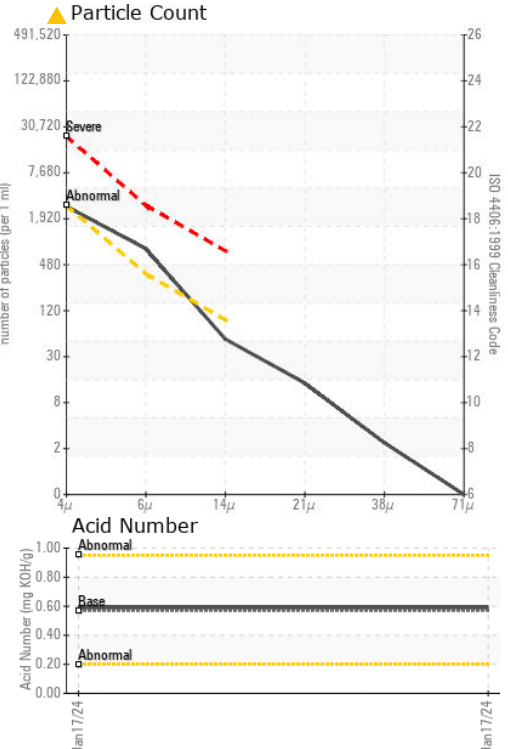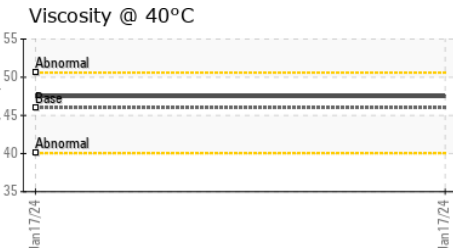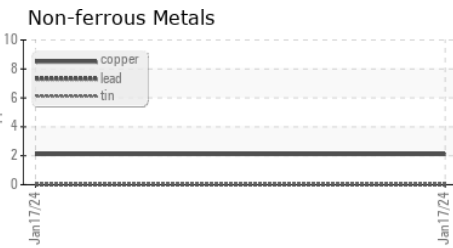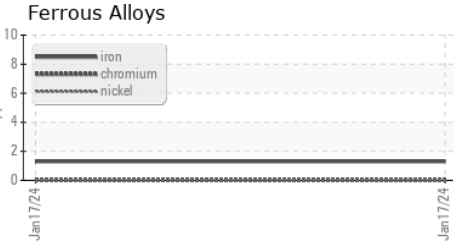

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0883610 **Received** : 18 Jan 2024  
**Lab Number** : 06064300 **Diagnosed** : 21 Jan 2024  
**Unique Number** : 10835682 **Diagnostician** : Don Baldrige  
**Test Package** : IND 2

**NIAGARA PLASTICS - CAPPLUGS**  
 7090 EDINBORO RD  
 ERIE, PA  
 US 16509  
 Contact: JOE SANDERS  
 joe.sanders@caplugs.com  
 T: (814)868-3671 x:5131  
 F: (814)868-9875

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)