

## **OIL ANALYSIS REPORT**

Sample Rating Trend



PRECO PRECO 1 Component Hydraulic System

MOBIL DTE 26 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Oct2019	Jan 2024		
SAMPLE INFORM	ΛΑΤΙΟΝ	method	limit/base	current	history1	history2
Sample Number		Client Info		PTK0000345	PTKM2325770	
Sample Date		Client Info		03 Jan 2024	16 Oct 2019	
Machine Age	hrs	Client Info		8460	4402960	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		Not Changd	N/A	
Sample Status				NORMAL	NORMAL	
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>10	0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m		0	0	
Aluminum	ppm	ASTM D5185m	>10	0	0	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m	>75	0	<1	
Tin	ppm	ASTM D5185m	>10	<1	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	<1	
Barium	ppm	ASTM D5185m		0	<1	
Molybdenum	ppm	ASTM D5185m		0	<1	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m		1	0	
Calcium	ppm	ASTM D5185m		40	46	
Phosphorus	ppm	ASTM D5185m		342	338	
Zinc	ppm	ASTM D5185m		414	418	
Sulfur	ppm	ASTM D5185m		889	789	
CONTAMINANTS	\$	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5	6	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	0	
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	129	1048	
Particles >6µm		ASTM D7647	>1300	22	228	
Particles >14µm		ASTM D7647	>160	3	16	
Particles >21µm		ASTM D7647	>40	1	4	
Particles >38µm		ASTM D7647	>10	0	0	
Particles >71µm		ASTM D7647	>3	0	0	
<u> </u>						

ISO 4406 (c) >19/17/14


**Oil Cleanliness** 


17/15/11


14/12/9



# **OIL ANALYSIS REPORT**

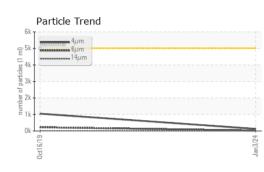

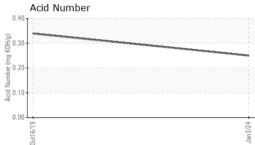

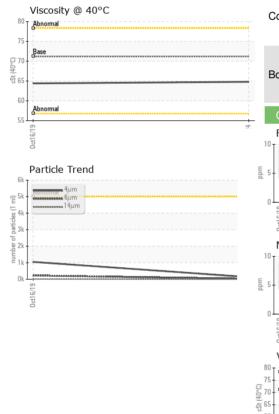

Certificate L2367

Acid Number (AN) VISUAL White Metal Yellow Metal Precipitate Silt Debris Sand/Dirt	mg KOH/g scalar scalar scalar	ASTM D8045 method *Visual *Visual *Visual	limit/base NONE NONE	0.25 current NONE	0.339 history1 NONE	 history2
White Metal Yellow Metal Precipitate Silt Debris	scalar scalar	*Visual *Visual	NONE			
Yellow Metal Precipitate Silt Debris	scalar scalar	*Visual		NONE	NONE	
Yellow Metal Precipitate Silt Debris	scalar scalar	*Visual				
Precipitate Silt Debris	scalar			NONE	NONE	
Silt Debris			NONE	NONE	NONE	
		*Visual	NONE	NONE	NONE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPERTI	ES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	71.2	64.8	64.4	
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color						no image
Bottom						no image
GRAPHS						
			491.520			т2
iron						-2
				Severe		
						-2
<u>و</u>			42/ 7,680	Abnormal		-2
0ct16			Le 1.920		•	-1
Non-ferrous Metals	;		: 11 480			+2 -1 -1 -1
			5 120		<b>N</b>	-1
lead			qunu 20			
						1
:116/11			2/2/2 u	ŧ		-6
				μ 6μ	14µ 21µ	38µ 71µ
				Acid Number	50 El	a
; [			H 0.40			
]			ຍູ່ 0.20			
			0.10			
) <del>L i</del>			0.00 Acid	5 5		
ct16/1			Jan 3/2	ct16/1		
0			,	0		
	Visc @ 40°C SAMPLE IMAGES Color Bottom GRAPHS Ferrous Alloys Ferrous Alloys Viscosity @ 40°C	SAMPLE IMAGES Color Bottom GRAPHS Ferrous Alloys Graphical Second	Visc @ 40°C cSt ASTM D445 SAMPLE IMAGES method Color Bottom GRAPHS Ferrous Alloys final free from the formation of the	Visc @ 40°C cSt ASTM D445 71.2 SAMPLE IMAGES method imit/base Color Bottom GRAPHS Ferrous Alloys Viscosity @ 40°C Viscosity @ 40°C	Visc @ 40°C cSt ASTM D445 71.2 64.8 SAMPLE IMAGES method imit/base current Color Bottom CRAPHS Ferrous Alloys Particle Count of the second seco	Visc @ 40°C cSt ASTM D445 71.2 64.8 64.4 SAMPLE IMAGES method Imit/base current history1 Color Bottom Particle Count GRAPHS Ferrous Alloys Particle Count Company Non-ferrous Metals Uscosity @ 40°C Uscosity @ 40°C Commany Viscosity @ 40°C Commany Visc

US 60108 Contact: DENNIS HANNA dhanna@sunsethcs.com T: (708)370-0452 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:



Test Package : MOB 2

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Contact/Location: DENNIS HANNA - SUNBLO