

Area Sample Unit

416WHS1945

## **OIL ANALYSIS REPORT**

Sample Rating Trend



Component Transmission (Auto) Fluid

MOBIL MULTI-VEHICLE ATF (--- GAL)

### DIAGNOSIS

#### A Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		SBP0005149		
Sample Date		Client Info		09 Jan 2024		
Machine Age	hrs	Client Info		10		
Oil Age	hrs	Client Info		10		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>50	14		
Iron	ppm	ASTM D5185m	>160	<1		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm		>5	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>50	<1		
Lead	ppm	ASTM D5185m	>50	<1		
Copper	ppm	ASTM D5185m	>225	1		
Tin	ppm		>225	۱ <1		
Vanadium		ASTM D5185m	>10	0		
	ppm			-		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		94		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		6		
Calcium	ppm	ASTM D5185m		138		
Phosphorus	ppm	ASTM D5185m		267		
Zinc	ppm	ASTM D5185m		3		
Sulfur	ppm	ASTM D5185m		1430		
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	5		
Sodium	ppm	ASTM D5185m		14		
Potassium	ppm	ASTM D5185m	>20	<1		
Water	%	ASTM D6304	>0.1	0.045		
ppm Water	ppm	ASTM D6304	>1000	457		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>64008</b>		
Particles >6µm		ASTM D7647	>2500	<u> </u>		
Particles >14µm		ASTM D7647	>320	87		
Particles >21µm		ASTM D7647	>80	16		
Particles >38µm		ASTM D7647	>20	1		
Particles >71µm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>A</b> 23/20/14		
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.30		
:51:03) Rev: 2					Submitted F	y: Scott Craver

Report Id: CEROMA [WUSCAR] 06064346 (Generated: 01/21/2024 10:51:03) Rev: 2

Submitted By: Scott Craven



# **OIL ANALYSIS REPORT**

method


limit/base


current


history1

history2

VISUAL

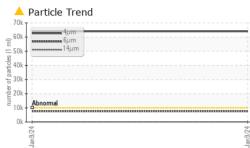

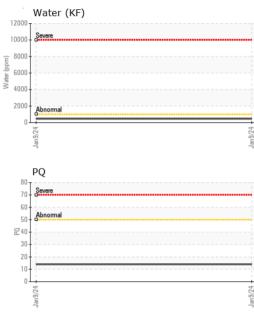

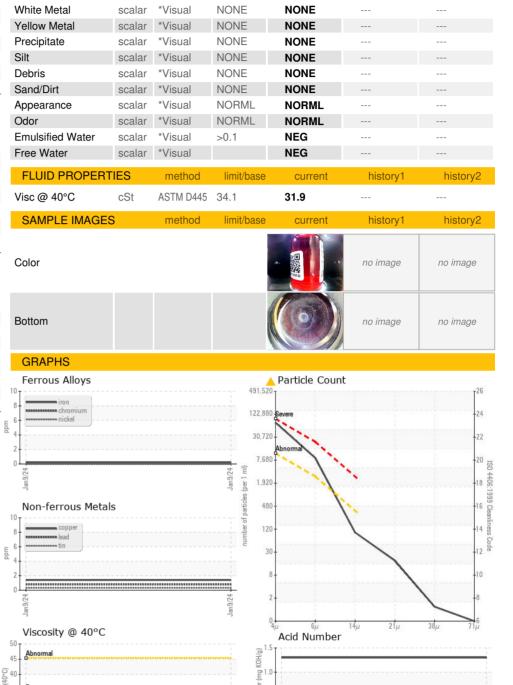

-q m 0.5

0.0

Acid

lan9/24

: 18 Jan 2024

: 21 Jan 2024


: Don Baldridge


: WearCheck USA - 501 Madison Ave., Cary, NC 27513

Diagnostician

Recieved

Diagnosed

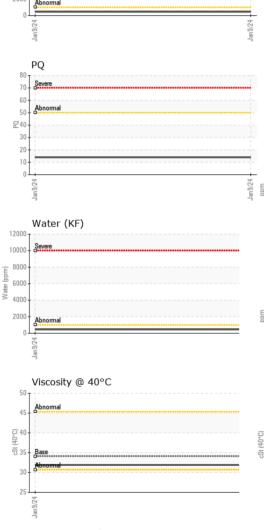

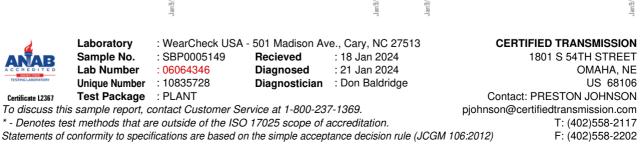

Certificate L2367

35

30

25

Laboratory

Sample No.

Lab Number

Unique Number

Test Package

an 9

: SBP0005149

: 06064346

: 10835728

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

: PLANT