



# OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area  
**Test Area**  
 Machine Id  
**Dyno I**  
 Component  
**Test Point**  
 Fluid  
**MOBIL MULTI-VEHICLE ATF (35 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>SBP0005135</b>	---	---
Sample Date	Client Info	<b>09 Jan 2024</b>	---	---
Machine Age	hrs Client Info	<b>1</b>	---	---
Oil Age	hrs Client Info	<b>1</b>	---	---
Oil Changed	Client Info	<b>Not Changed</b>	---	---
Sample Status		<b>ABNORMAL</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	<b>12</b>	---	---
Iron	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Chromium	ppm ASTM D5185m	<b>0</b>	---	---
Nickel	ppm ASTM D5185m	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Lead	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Tin	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>78</b>	---	---
Barium	ppm ASTM D5185m	<b>0</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	<b>4</b>	---	---
Calcium	ppm ASTM D5185m	<b>129</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>223</b>	---	---
Zinc	ppm ASTM D5185m	<b>2</b>	---	---
Sulfur	ppm ASTM D5185m	<b>1207</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	<b>5</b>	---	---
Sodium	ppm ASTM D5185m	<b>3</b>	---	---
Potassium	ppm ASTM D5185m	<b>&gt;20</b>	---	---
Water	% ASTM D6304	<b>0.022</b>	---	---
ppm Water	ppm ASTM D6304	<b>221</b>	---	---

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000 <b>▲ 89170</b>	---	---
Particles >6µm	ASTM D7647	>1300 <b>▲ 11297</b>	---	---
Particles >14µm	ASTM D7647	>160 <b>140</b>	---	---
Particles >21µm	ASTM D7647	>40 <b>25</b>	---	---
Particles >38µm	ASTM D7647	>10 <b>0</b>	---	---
Particles >71µm	ASTM D7647	>3 <b>0</b>	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14 <b>▲ 24/21/14</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	<b>1.25</b>	---	---



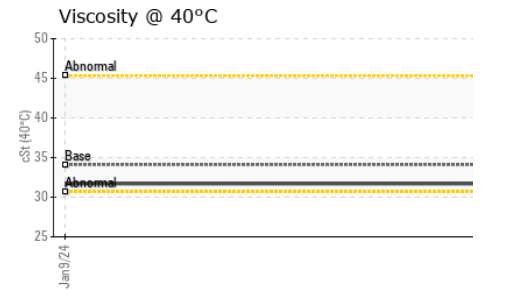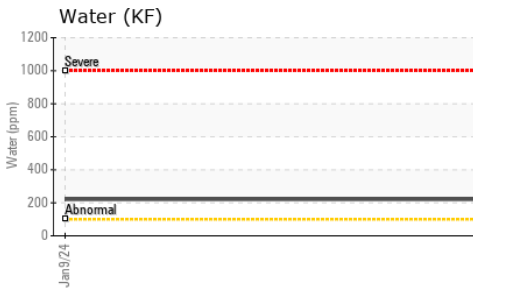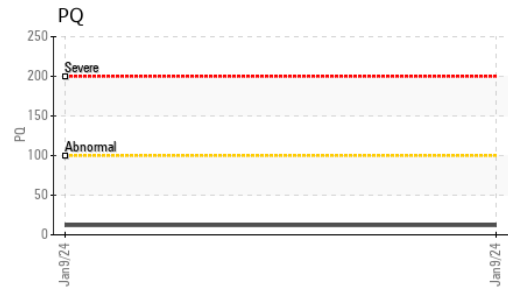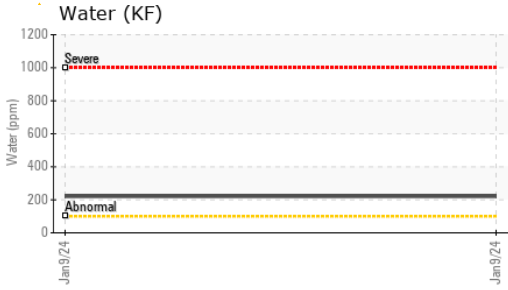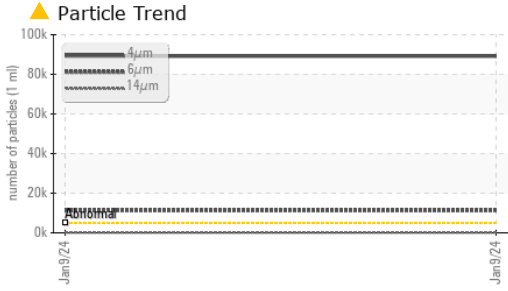

# OIL ANALYSIS REPORT






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	NEG	---	---	
Free Water	scalar	*Visual	NEG	---	---	

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	34.1	31.7	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

### GRAPHS

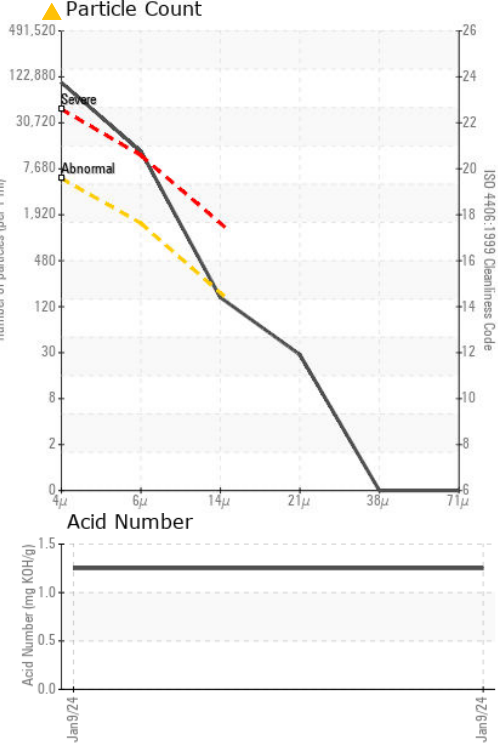

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005135 **Received** : 18 Jan 2024  
**Lab Number** : 06064347 **Diagnosed** : 21 Jan 2024  
**Unique Number** : 10835729 **Diagnostician** : Don Baldrige  
**Test Package** : PLANT

**CERTIFIED TRANSMISSION**  
 1801 S 54TH STREET  
 OMAHA, NE  
 US 68106  
 Contact: PRESTON JOHNSON  
 pjohnson@certifiedtransmission.com  
 T: (402)558-2117  
 F: (402)558-2202

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)