



OIL ANALYSIS REPORT

Sample Rating Trend



ISO



Area
Test Area
 Machine Id
SGL6
 Component
Test Point
 Fluid
MOBIL MULTI-VEHICLE ATF (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	SBP0005143	---	---
Sample Date	Client Info	09 Jan 2024	---	---
Machine Age	hrs Client Info	20	---	---
Oil Age	hrs Client Info	20	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
PQ	ASTM D8184	17	---	---
Iron	ppm ASTM D5185m	12	---	---
Chromium	ppm ASTM D5185m	0	---	---
Nickel	ppm ASTM D5185m	<1	---	---
Titanium	ppm ASTM D5185m	0	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m	7	---	---
Lead	ppm ASTM D5185m	<1	---	---
Copper	ppm ASTM D5185m	4	---	---
Tin	ppm ASTM D5185m	<1	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	63	---	---
Barium	ppm ASTM D5185m	0	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	1	---	---
Magnesium	ppm ASTM D5185m	5	---	---
Calcium	ppm ASTM D5185m	124	---	---
Phosphorus	ppm ASTM D5185m	225	---	---
Zinc	ppm ASTM D5185m	4	---	---
Sulfur	ppm ASTM D5185m	1220	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	8	---	---
Sodium	ppm ASTM D5185m	4	---	---
Potassium	ppm ASTM D5185m	>20	---	---
Water	% ASTM D6304	0.018	---	---
ppm Water	ppm ASTM D6304	189	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000 ▲ 82645	---	---
Particles >6µm	ASTM D7647	>1300 ▲ 9872	---	---
Particles >14µm	ASTM D7647	>160 87	---	---
Particles >21µm	ASTM D7647	>40 10	---	---
Particles >38µm	ASTM D7647	>10 1	---	---
Particles >71µm	ASTM D7647	>3 0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14 ▲ 24/20/14	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045	1.21	---	---





OIL ANALYSIS REPORT

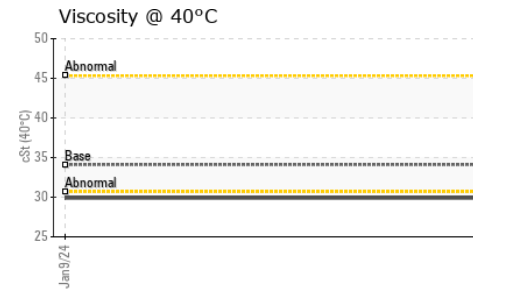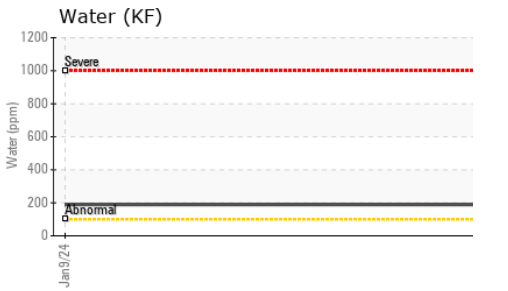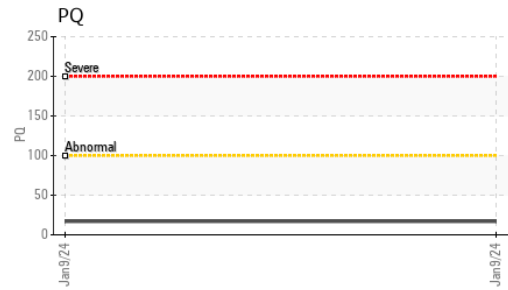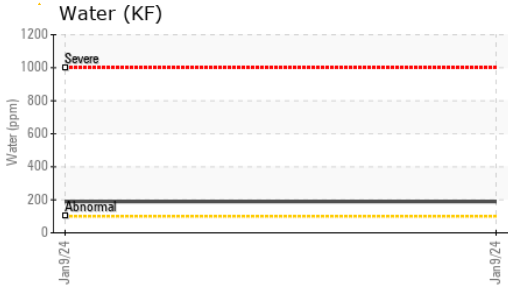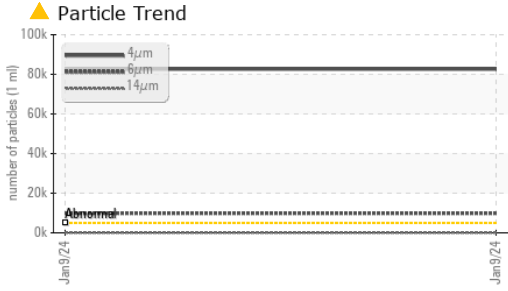





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	NEG	---	---
Free Water	scalar	*Visual	NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34.1	29.9	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

GRAPHS

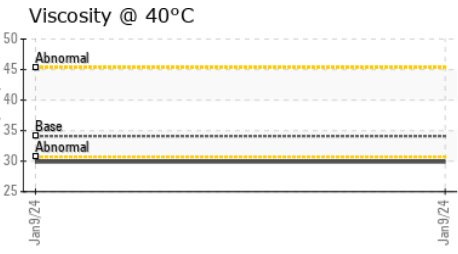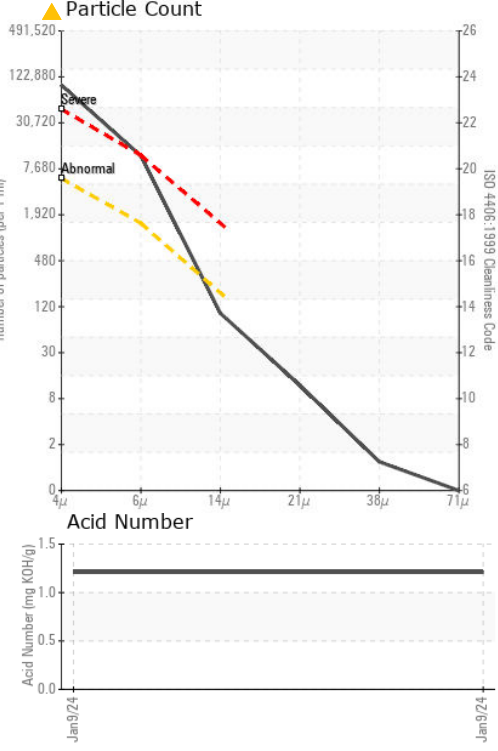

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : SBP0005143 **Recieved** : 18 Jan 2024
Lab Number : 06064349 **Diagnosed** : 21 Jan 2024
Unique Number : 10835731 **Diagnostician** : Don Baldrige
Test Package : PLANT

CERTIFIED TRANSMISSION
 1801 S 54TH STREET
 OMAHA, NE
 US 68106
 Contact: PRESTON JOHNSON
 pjohnson@certifiedtransmission.com
 T: (402)558-2117
 F: (402)558-2202

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)