

OIL ANALYSIS REPORT

Sample Unit 088FTD2446

Component

Transmission (Auto)

MOBIL MULTI-VEHICLE ATF (--- GAL)

Sample Rating Trend ISO

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

				Jan 2024		
SAMPLE INFORMA	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		SBP0005148		
Sample Date		Client Info		09 Jan 2024		
Machine Age	hrs	Client Info		10		
Oil Age	hrs	Client Info		10		
Oil Changed		Client Info		Not Changd		
Sample Status				ABNORMAL		
WEAR METALS		method	limit/base	current	history1	history2
PQ		ASTM D8184	>50	10		
Iron	ppm	ASTM D5185m	>160	1		
Chromium	ppm	ASTM D5185m	>5	0		
Nickel	ppm	ASTM D5185m	>5	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>5	0		
Aluminum	ppm	ASTM D5185m	>50	2		
Lead	ppm	ASTM D5185m	>50	1		
Copper	ppm	ASTM D5185m	>225	2		
Tin	ppm	ASTM D5185m	>10	<1		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		66		
Barium	ppm	ASTM D5185m		0		
Molybdenum	ppm	ASTM D5185m		0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m		10		
Calcium	ppm	ASTM D5185m		133		
Phosphorus	ppm	ASTM D5185m		212		
Zinc	ppm	ASTM D5185m		11		
Sulfur	ppm	ASTM D5185m		1161		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	6		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	1		
Water	%	ASTM D6304	>0.1	0.035		
ppm Water	ppm	ASTM D6304	>1000	352		
FLUID CLEANLINE	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<u>\$\text{93394}\$</u>		
Particles >6μm		ASTM D7647	>2500	△ 6595		
Particles >14μm		ASTM D7647	>320	35		
Particles >21µm		ASTM D7647	>80	5		
Particles >38μm		ASTM D7647	>20	0		
Particles >71μm		ASTM D7647	>4	0		
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<u>4</u> 24/20/12		
FLUID DEGRADAT	ΓΙΟΝ	method	limit/base	current	history1	history2

Acid Number (AN)


mg KOH/g ASTM D8045

1.13

Submitted By: Scott Craven



OIL ANALYSIS REPORT

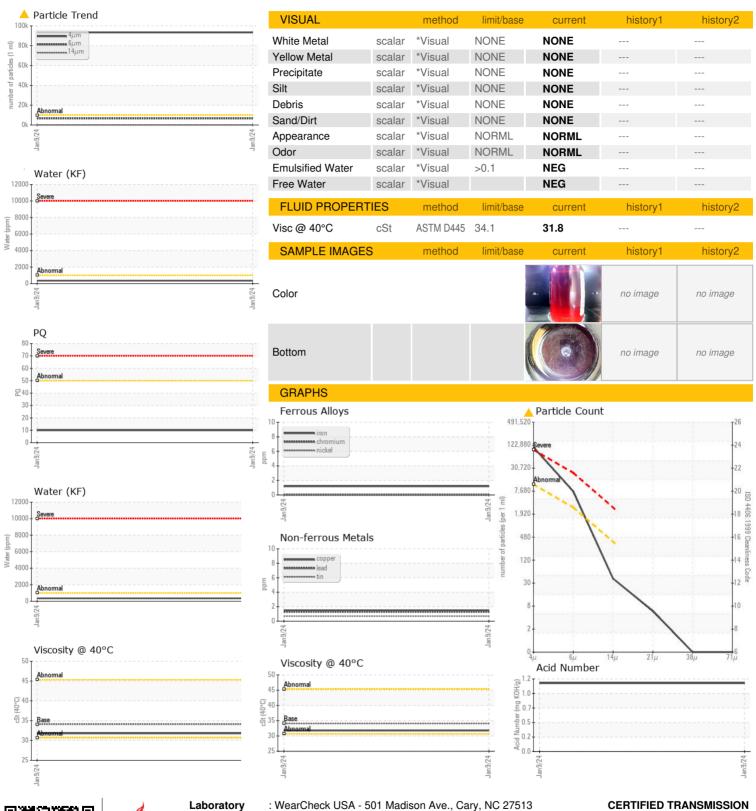



Certificate L2367

Laboratory Sample No. Lab Number **Unique Number** Test Package

: SBP0005148 : 06064350

: 10835732 : PLANT

: 18 Jan 2024 Recieved Diagnosed : 19 Jan 2024 Diagnostician

: Doug Bogart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

1801 S 54TH STREET OMAHA, NE US 68106

Contact: PRESTON JOHNSON

pjohnson@certifiedtransmission.com

T: (402)558-2117 F: (402)558-2202

Report Id: CEROMA [WUSCAR] 06064350 (Generated: 01/19/2024 20:39:45) Rev: 1

Submitted By: Scott Craven