

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend

ISO

# KAESER 7550717

Compressor Fluid KAESER SIGMA (OEM) M-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.


#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Nov2022	Jan2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010283	KCP47162	
Sample Date		Client Info		08 Jan 2024	14 Nov 2022	
Machine Age	hrs	Client Info		1641	523	
Oil Age	hrs	Client Info		0	523	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<1	<1	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>50	1	<1	
Tin	ppm		>10	0	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	65	35	
Volybdenum	ppm	ASTM D5185m	0	0	0	
Vanganese	ppm	ASTM D5185m		<1	0	
Vagnesium	ppm	ASTM D5185m	100	90	80	
Calcium	ppm	ASTM D5185m	0	5	3	
Phosphorus	ppm	ASTM D5185m	0	0	2	
Zinc	ppm	ASTM D5185m	0	0	<1	
Sulfur	ppm	ASTM D5185m	23500	18820	21646	
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	5	2	
Sodium	ppm	ASTM D5185m		20	13	
Potassium	ppm	ASTM D5185m	>20	4	7	
Water	%	ASTM D6304	>0.05	0.025	0.018	
opm Water	ppm	ASTM D6304	>500	251	185.7	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		15665	5206	
Particles >6µm		ASTM D7647	>1300	<u> </u>	760	
Particles >14µm		ASTM D7647	>80	<u> </u>	44	
Particles >21µm		ASTM D7647	>20	<mark>人</mark> 59	14	
Particles >38µm		ASTM D7647	>4	1	1	
Particles >71µm		ASTM D7647	>3	0	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 21/19/15	20/17/13	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.43	0.32	




### Built for a lifetime.




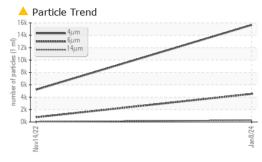



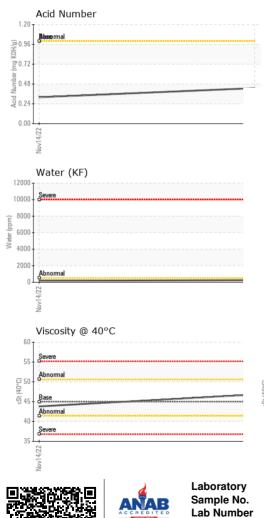

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	
Precipitate	scalar	*Visual	NONE	NONE	NONE	
Silt	scalar	*Visual	NONE	NONE	NONE	
Debris	scalar	*Visual	NONE	NONE	VLITE	
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	
Appearance	scalar	*Visual	NORML	NORML	NORML	
Odor	scalar	*Visual	NORML	NORML	NORML	
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	
Free Water	scalar	*Visual		NEG	NEG	
FLUID PROPER	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45	46.8	43.8	
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				•		no image
Bottom						no image
GRAPHS						
Ferrous Alloys				Particle Coun	t	
iron i			491,520	I		T <sup>26</sup>
8 - chromium			122,880	-		-24
4			30,720			
2			30,720			-22
oL			7,680			-20
Nav14/22			Jan8/24 . (per 1 ml)	\`.		-20 -18
Nov			Jar s (per	1	N	-10 -

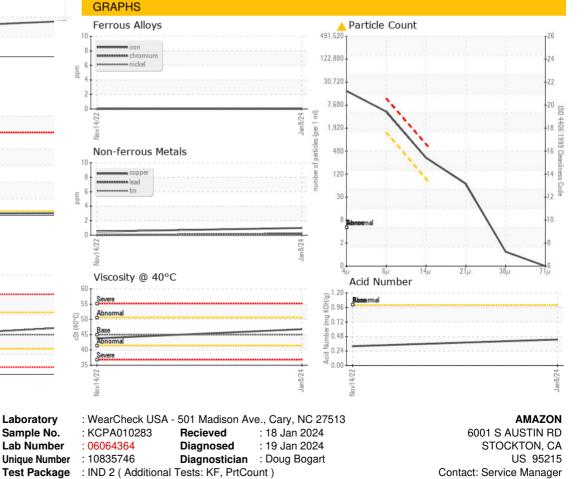

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:

Certificate L2367

Contact/Location: Service Manager - AMASTOCA