



# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id


**627**

Component

**Diesel Engine**

Fluid

**PETRO CANADA TEST OIL GREY II HDEO 0W20 (--- GAL)**

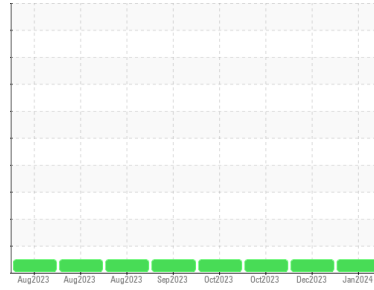

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>AK0000104</b>	AK0000109	AK0000111
Sample Date	Client Info		<b>10 Jan 2024</b>	08 Dec 2023	31 Oct 2023
Machine Age	mls	Client Info	<b>419002</b>	408569	395802
Oil Age	mls	Client Info	<b>10433</b>	50186	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >90	<b>6</b>	21	13
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	3	3
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	2	3
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	0
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>0</b>	0	3
Barium	ppm	ASTM D5185m	<b>0</b>	9	0
Molybdenum	ppm	ASTM D5185m	<b>60</b>	66	62
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>1024</b>	1005	976
Calcium	ppm	ASTM D5185m	<b>1042</b>	1115	1073
Phosphorus	ppm	ASTM D5185m	<b>1110</b>	1077	1017
Zinc	ppm	ASTM D5185m	<b>1304</b>	1291	1319
Sulfur	ppm	ASTM D5185m	<b>3156</b>	2920	2944

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	4
Sodium	ppm	ASTM D5185m	<b>2</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	7	5



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	<b>0.1</b>	0.4	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.1</b>	10.8	10.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>25.2</b>	29.0	27.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.1</b>	27.1	25.0
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.7</b>	5.3	6.3





# OIL ANALYSIS REPORT

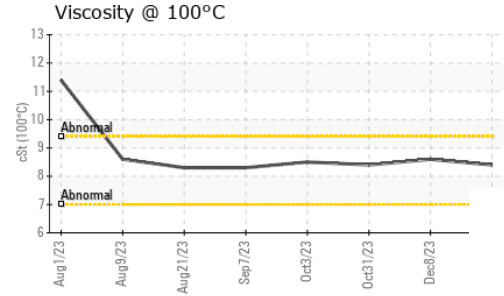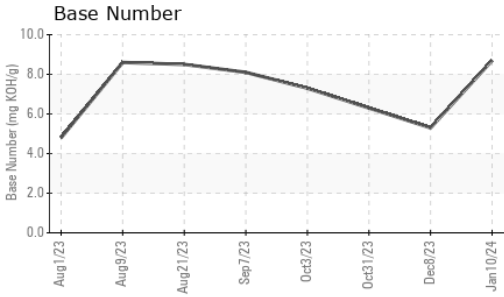

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>8.4</b>	8.6	8.4

## GRAPHS

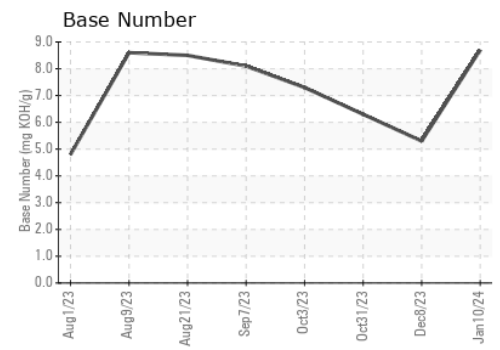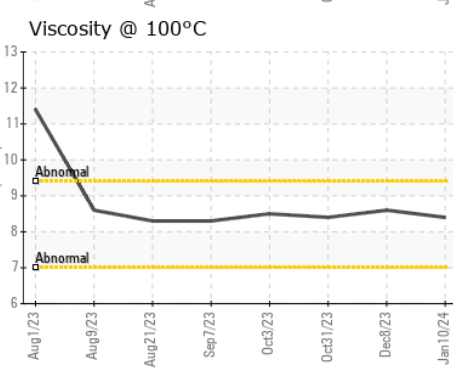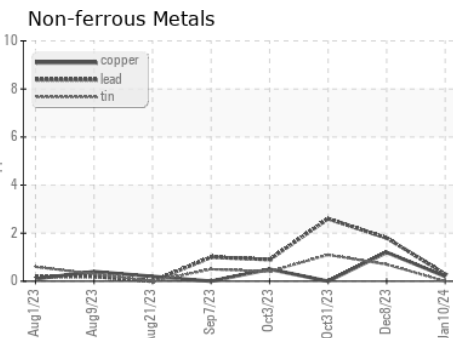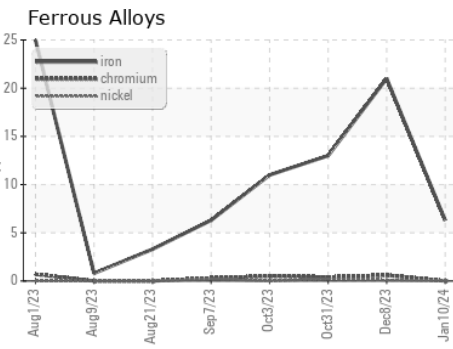

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : AK0000104 **Recieved** : 18 Jan 2024  
**Lab Number** : **06064819** **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10836201 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**MEYER LOGISTICS**  
 560 EAST 25TH ST  
 JASPER, IN  
 US 47546

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: KEN FROMME  
 kenny.fromme@meyerdistributing.com  
 T: (812)639-9224  
 F: