




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

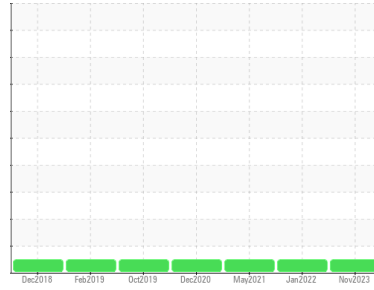

Machine Id  
**INTERNATIONAL 441284**

Component  
**Diesel Engine**

Fluid  
**MOBIL DELVAC 1300 SUPER15W40 (46 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>IL0030521</b>	IL0024351	IL0019818
Sample Date	Client Info			<b>16 Nov 2023</b>	12 Jan 2022	11 May 2021
Machine Age	mls	Client Info		<b>271551</b>	240366	0
Oil Age	mls	Client Info		<b>31185</b>	30000	0
Oil Changed	Client Info			<b>N/A</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	<b>23</b>	28	40
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	5
Lead	ppm	ASTM D5185m	>150	<b>1</b>	1	5
Copper	ppm	ASTM D5185m	>90	<b>&lt;1</b>	<1	1
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	1
Antimony	ppm	ASTM D5185m		<b>---</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>7</b>	46	28
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	0	<b>61</b>	42	34
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	0	<b>949</b>	558	584
Calcium	ppm	ASTM D5185m		<b>1152</b>	1766	1605
Phosphorus	ppm	ASTM D5185m		<b>1045</b>	838	768
Zinc	ppm	ASTM D5185m		<b>1257</b>	1036	929
Sulfur	ppm	ASTM D5185m		<b>3144</b>	2690	2413



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	<b>7</b>	7	4
Sodium	ppm	ASTM D5185m		<b>3</b>	2	4
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	3	7

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	<b>0.4</b>	0.2	0.4
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.0</b>	9.2	12.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.7</b>	24.4	26.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.0</b>	22.4	24.7
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	<b>8.0</b>	10.2	6.9







# OIL ANALYSIS REPORT

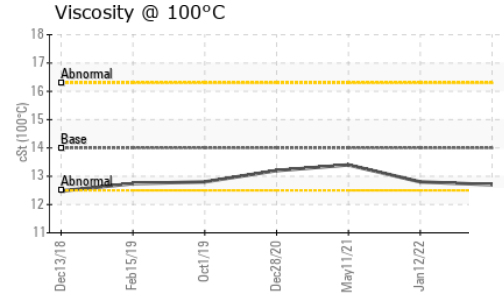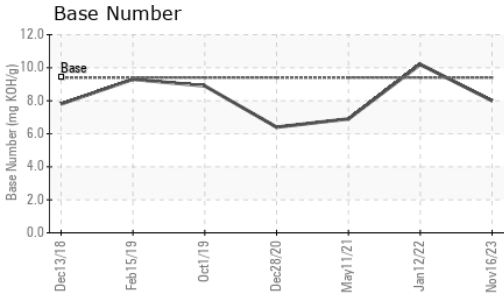

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	<b>12.7</b>	12.8	13.4

## GRAPHS

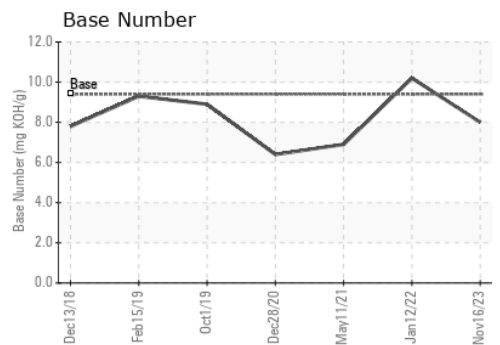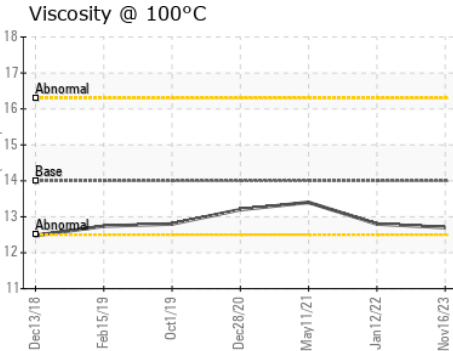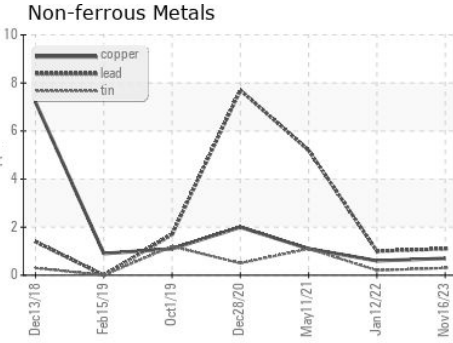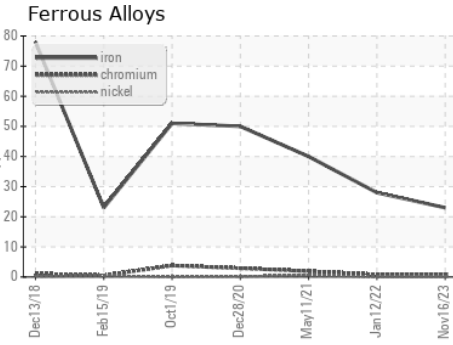

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : IL0030521 **Recieved** : 18 Jan 2024  
**Lab Number** : **06064842** **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10836224 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**RUSH TRUCK LEASING - CHARLOTTE IDEALEASE**  
 1333 AMERON DR  
 CHARLOTTE, NC  
 US 28206  
 Contact: JERRY DIXON  
 dixonj@rushenterprises.com  
 T: (704)333-4507  
 F: (704)333-4508

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)