




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

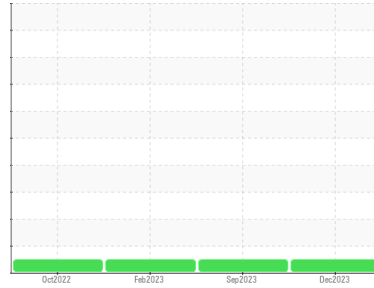

Machine Id
22303

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0832060	WC05952473	WC0784061
Sample Date	Client Info			05 Dec 2023	14 Sep 2023	14 Feb 2023
Machine Age	mls	Client Info		212382	152469	105011
Oil Age	mls	Client Info		50000	50000	50000
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	43	36	61
Chromium	ppm	ASTM D5185m	>20	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	<1
Aluminum	ppm	ASTM D5185m	>20	5	6	15
Lead	ppm	ASTM D5185m	>40	<1	<1	<1
Copper	ppm	ASTM D5185m	>330	3	4	9
Tin	ppm	ASTM D5185m	>15	<1	2	2
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	5	3	5
Barium	ppm	ASTM D5185m	10	0	44	0
Molybdenum	ppm	ASTM D5185m	100	73	67	65
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m	450	988	852	978
Calcium	ppm	ASTM D5185m	3000	1275	1159	1536
Phosphorus	ppm	ASTM D5185m	1150	1164	942	1056
Zinc	ppm	ASTM D5185m	1350	1418	1165	1335
Sulfur	ppm	ASTM D5185m	4250	2850	3088	3560



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	13	11	19
Sodium	ppm	ASTM D5185m		1	3	4
Potassium	ppm	ASTM D5185m	>20	5	11	33

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.5	0.4	0.5
Nitration	Abs/cm	*ASTM D7624	>20	14.5	12.6	13.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.9	24.1	28.2

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	28.2	20.7	25.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	4.2	5.9	4.5







OIL ANALYSIS REPORT

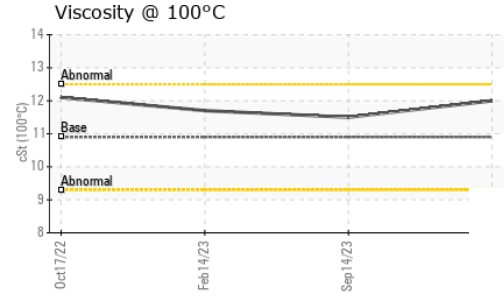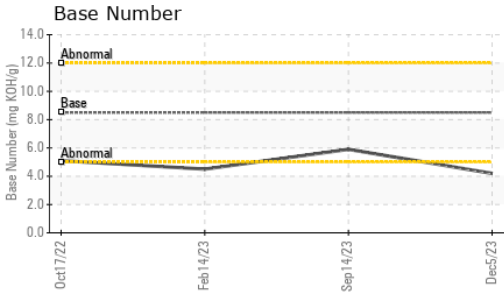

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	12.0	11.5	11.7

GRAPHS

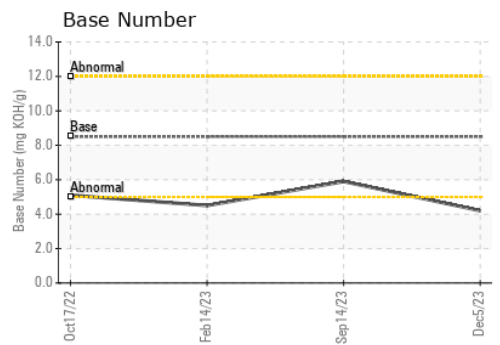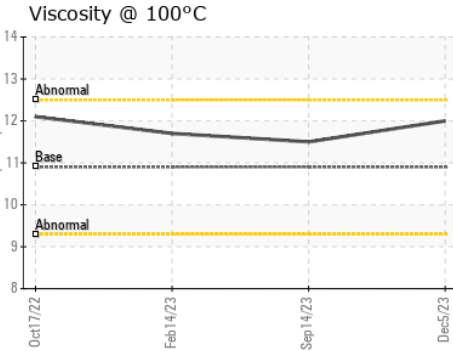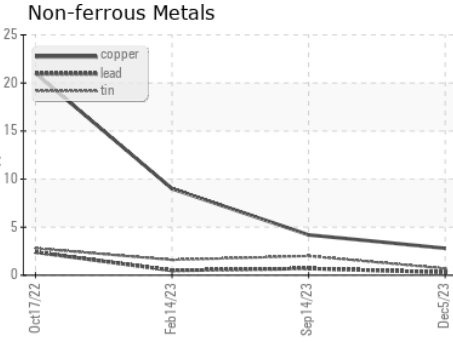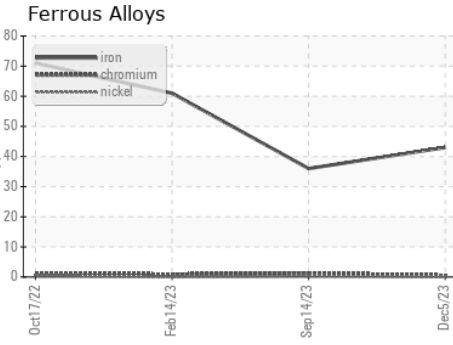

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0832060 **Received** : 18 Jan 2024
Lab Number : **06064899** **Diagnosed** : 21 Jan 2024
Unique Number : 10836281 **Diagnostician** : Don Baldrige
Test Package : FLEET

MID-ATLANTIC TRANSPORT
 38 IRONSIDE CT
 WILLINGBORO, NJ
 US 08046
 Contact: GARY LAWYER
 gary@midatlantictrans.com
 T: (609)864-6948
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)