




# OIL ANALYSIS REPORT

Sample Rating Trend

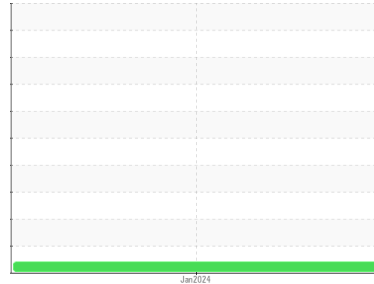

VISCOSITY



Machine Id  
**142001**

Component  
**Diesel Engine**

Fluid  
**LIEBHERR MOTOROIL 10W-40 LOW ASH (--- GAL)**

## DIAGNOSIS

### ▲ Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible.

### ▲ Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>LM0000793</b>	---	---
Sample Date	Client Info		<b>11 Jan 2024</b>	---	---
Machine Age	hrs	Client Info	<b>517</b>	---	---
Oil Age	hrs	Client Info	<b>517</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>ABNORMAL</b>	---	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>9</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m >5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m >15	<b>3</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>1</b>	---	---
Copper	ppm	ASTM D5185m >125	<b>188</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>1</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 169	<b>99</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>18</b>	---	---
Molybdenum	ppm	ASTM D5185m 2	<b>42</b>	---	---
Manganese	ppm	ASTM D5185m <1	<b>5</b>	---	---
Magnesium	ppm	ASTM D5185m 724	<b>900</b>	---	---
Calcium	ppm	ASTM D5185m 1323	<b>1270</b>	---	---
Phosphorus	ppm	ASTM D5185m 678	<b>752</b>	---	---
Zinc	ppm	ASTM D5185m 776	<b>910</b>	---	---
Sulfur	ppm	ASTM D5185m 2859	<b>2199</b>	---	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >60	<b>9</b>	---	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	---	---
Fuel	%	ASTM D3524 >5	<b>0.3</b>	---	---

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>38.8</b>	---	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>49.2</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.28	<b>6.0</b>	---	---







# OIL ANALYSIS REPORT

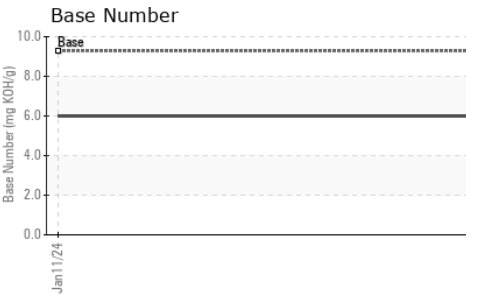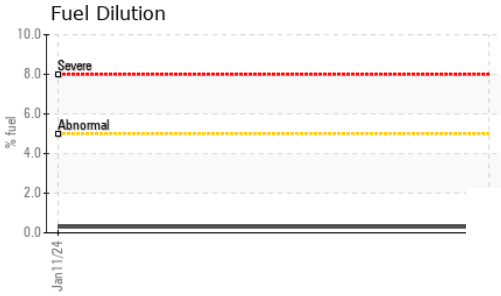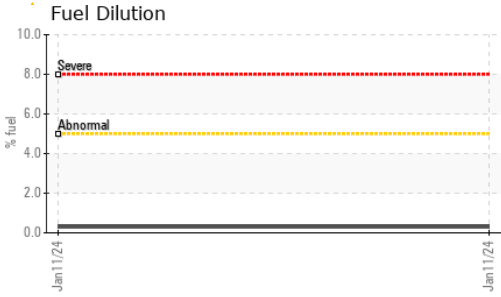

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	13.0	▲ 11.8	---	---

### GRAPHS

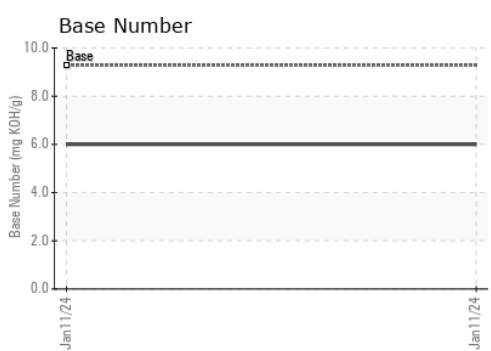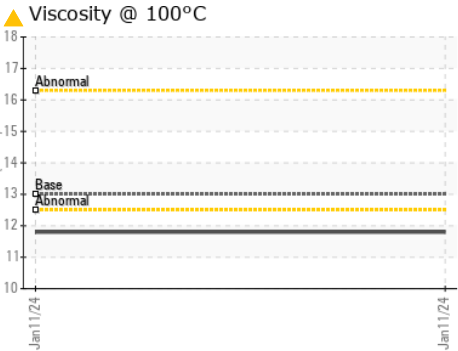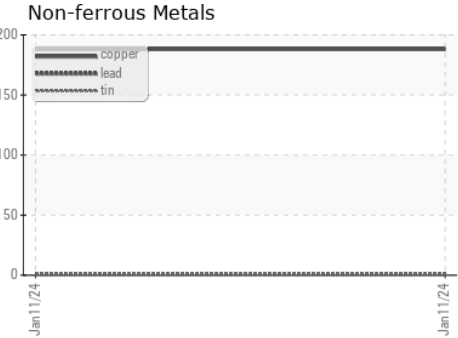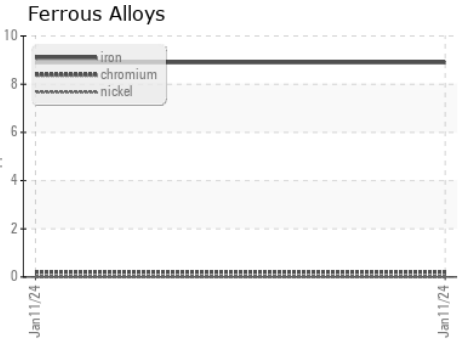

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LM0000793 **Received** : 18 Jan 2024  
**Lab Number** : 06064944 **Diagnosed** : 24 Jan 2024  
**Unique Number** : 10836326 **Diagnostician** : Angela Borella  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**LIEBHERR USA CO - Maritime Cranes**  
 15101 NW 112TH AVE  
 HIALEAH GARDENS, FL  
 US 33018  
 Contact: RONNY FUNK  
 ronny.funk@liebherr.com  
 T: (305)817-7566  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)