

OIL ANALYSIS REPORT

E-2 Machine Id ATLAS COPCO Atlas Copco Inst Air Compressor-65003 Component Air Compressor

Fluid {not provided} (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear


All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.




SAMPLE INFORM	ATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0771978	WC0670644	WC0670646
Sample Date		Client Info		14 Jan 2024	14 Jan 2023	31 Dec 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ABNORMAL	NORMAL
CONTAMINATION	N	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>70	0	3	0
Chromium	ppm	ASTM D5185m		<1	<1	0
Nickel	ppm	ASTM D5185m	>6	0	<1	0
Titanium	ppm	ASTM D5185m	20	<1	▲ 87	0
Silver		ASTM D5185m		0	<1	0
	ppm	ASTM D5185m	>10	2	<1	0
Aluminum	ppm	ASTM D5185m ASTM D5185m			1	0
Lead	ppm		>20	<1		
Copper	ppm	ASTM D5185m	>80	<1	<1	0
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	148	0
Barium	ppm	ASTM D5185m		1	4	0
Molybdenum	ppm	ASTM D5185m		0	1	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		<1	629	0
Calcium	ppm	ASTM D5185m		<1	1306	<1
Phosphorus	ppm	ASTM D5185m		29	934	7
Zinc	ppm	ASTM D5185m		0	1145	<1
Sulfur	ppm	ASTM D5185m		444	3988	248
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		▲ 14 0	4	<1
Sodium	ppm	ASTM D5185m		0	2	<1
Potassium	ppm	ASTM D5185m	>20	<1	4	0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	19773	44171	404
Particles >6µm		ASTM D7647	>2500	3466	303	82
Particles >14µm		ASTM D7647	>320	141	6	8
Particles >21µm		ASTM D7647	>80	34	1	2
Particles >38µm		ASTM D7647	>20	1	0	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	2 1/19/14	▲ 23/15/10	16/14/10
Oli Cleaniness						
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
	TION	method ASTM D8045	limit/base	current 0.047	history1 3.15	history2 0.058


Report Id: CONANCAK [WUSCAR] 06065061 (Generated: 01/22/2024 17:06:06) Rev: 1


Contact/Location: GREG MARKLE HEATH CABANSKI - CONANCAK



OIL ANALYSIS REPORT







<u></u> <u></u> <u></u> <u></u> 2.00

-e 1.50

0.51

0.00

100

90

80 cSt (40°C)

70

60

3


Abnorma 50

Al 40

Acid Nu 1 00

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	TIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445		68.0	▲ 90.22	67.9
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color						

Bottom

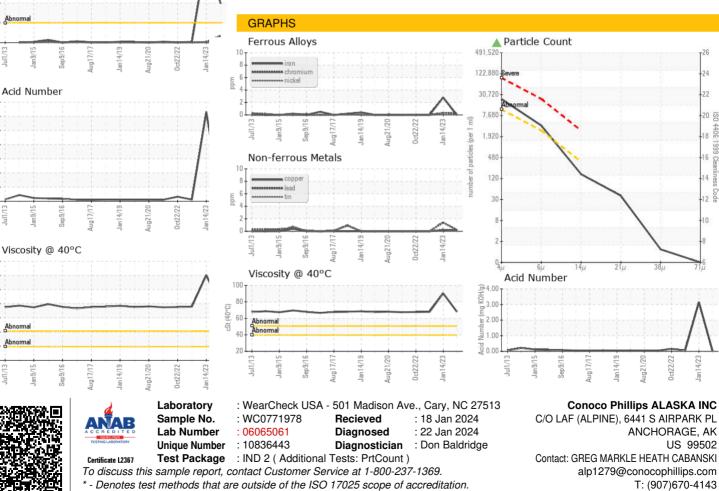

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: GREG MARKLE HEATH CABANSKI - CONANCAK

F: (907)670-4143