




# OIL ANALYSIS REPORT

Sample Rating Trend

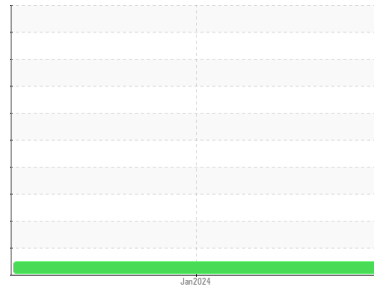

**NORMAL**



Machine Id

**33-PC-24 (S/N 36)**

Component

**Hydraulic System**

Fluid

**MILITARY MIL-H-83282C (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

Sample Number	Client Info	method	limit/base	current	history1	history2	
WC0887154	---	---	---	---	---	---	
Sample Date	Client Info	method	limit/base	current	history1	history2	
16 Jan 2024	---	---	---	---	---	---	
Machine Age	hrs	Client Info	method	limit/base	current	history1	history2
0	---	---	---	---	---	---	
Oil Age	hrs	Client Info	method	limit/base	current	history1	history2
0	---	---	---	---	---	---	
Oil Changed	Client Info	method	limit/base	current	history1	history2	
N/A	---	---	---	---	---	---	
Sample Status	Client Info	method	limit/base	current	history1	history2	
NORMAL	---	---	---	---	---	---	

## WEAR METALS

Element	unit	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	0	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

## ADDITIVES

Element	unit	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		0	---	---
Calcium	ppm	ASTM D5185m		0	---	---
Phosphorus	ppm	ASTM D5185m		915	---	---
Zinc	ppm	ASTM D5185m		0	---	---
Sulfur	ppm	ASTM D5185m		28	---	---

## CONTAMINANTS

Element	unit	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	6	---	---
Sodium	ppm	ASTM D5185m		0	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water	%	ASTM D6304	>0.05	NEG	---	---

## FLUID CLEANLINESS





Parameter	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	222	---	---
Particles >6µm	ASTM D7647	>1300	99	---	---
Particles >14µm	ASTM D7647	>160	22	---	---
Particles >21µm	ASTM D7647	>40	6	---	---
Particles >38µm	ASTM D7647	>10	0	---	---
Particles >71µm	ASTM D7647	>3	0	---	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	15/14/12	---	---

## FLUID DEGRADATION

Parameter	unit	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.1	0.677	---	---



# OIL ANALYSIS REPORT

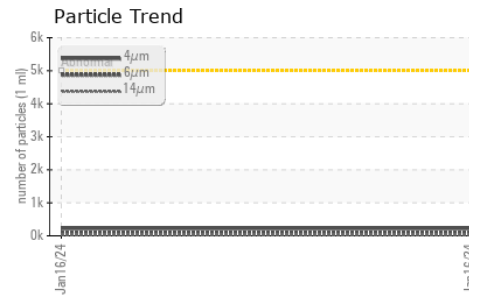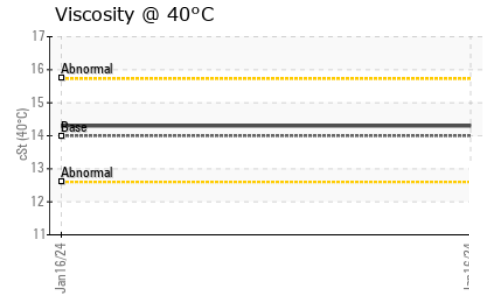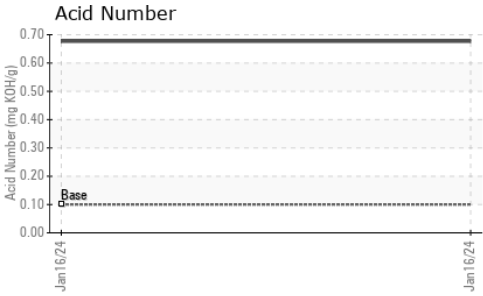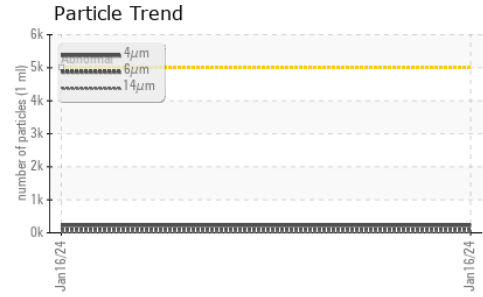






VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	14.0	<b>14.3</b>	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color		no image	no image
Bottom		no image	no image

## GRAPHS

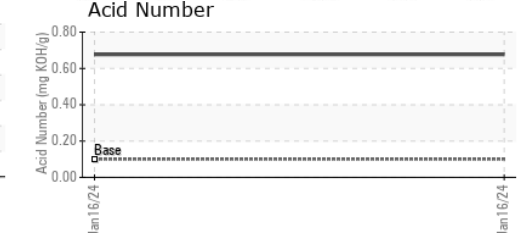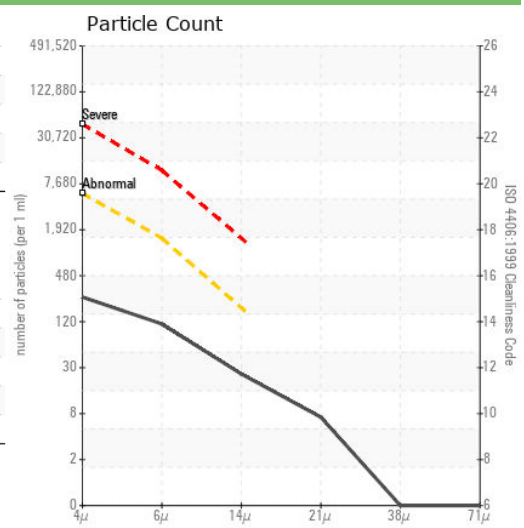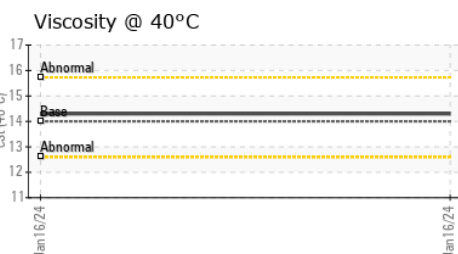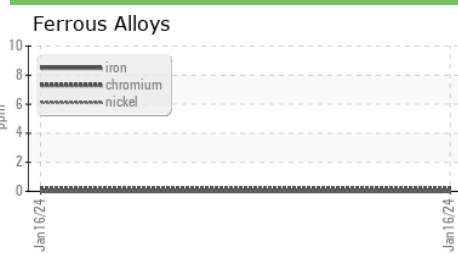

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0887154      **Received** : 18 Jan 2024  
**Lab Number** : 06065247      **Tested** : 02 Feb 2024  
**Unique Number** : 10836629      **Diagnosed** : 02 Feb 2024 - Doug Bogart  
**Test Package** : PLANT

**WOODWARD**  
 25200 W RYE CANYON RD  
 SANTA CLARITA, CA  
 US 91355  
 Contact: REYNARD GOLDMAN  
 reynard.goldman@woodward.com  
 T: (661)702-5991  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)