


OIL ANALYSIS REPORT



Machine Id
JOHN DEERE 748L 1DW748LXEJF690505
Component
Hydraulic System
Fluid
JOHN DEERE HYDRAU (--- GAL)

Sample Rating Trend

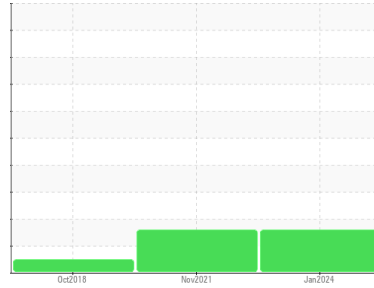

WEAR



DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The iron level is abnormal. The chromium level is abnormal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oils additive package is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		JR0200205	JR0088774	JRMC454812
Sample Date	Client Info		17 Jan 2024	03 Nov 2021	26 Oct 2018
Machine Age	hrs	Client Info	9925	6074	507
Oil Age	hrs	Client Info	0	0	507
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.075	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
PQ	ASTM D8184	>50	28	30	16
Iron	ppm	ASTM D5185m	>23	▲ 33	▲ 67
Chromium	ppm	ASTM D5185m	>9	▲ 9	▲ 18
Nickel	ppm	ASTM D5185m	>5	0	0
Titanium	ppm	ASTM D5185m		<1	<1
Silver	ppm	ASTM D5185m		0	0
Aluminum	ppm	ASTM D5185m	>9	3	6
Lead	ppm	ASTM D5185m	>28	0	<1
Copper	ppm	ASTM D5185m	>51	2	4
Tin	ppm	ASTM D5185m	>5	0	<1
Antimony	ppm	ASTM D5185m		---	0
Vanadium	ppm	ASTM D5185m		0	0
Cadmium	ppm	ASTM D5185m		0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	1
Barium	ppm	ASTM D5185m		0	0
Molybdenum	ppm	ASTM D5185m		2	<1
Manganese	ppm	ASTM D5185m		<1	<1
Magnesium	ppm	ASTM D5185m		25	4
Calcium	ppm	ASTM D5185m	87	72	126
Phosphorus	ppm	ASTM D5185m	727	287	727
Zinc	ppm	ASTM D5185m	900	331	895
Sulfur	ppm	ASTM D5185m	1500	921	1673






CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>31	7	14
Sodium	ppm	ASTM D5185m	>21	0	0
Potassium	ppm	ASTM D5185m	>20	0	4

FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>80000	18432	16619	2263
Particles >6µm	ASTM D7647	>20000	2042	295	208
Particles >14µm	ASTM D7647	>640	164	17	15
Particles >21µm	ASTM D7647	>160	42	5	6
Particles >38µm	ASTM D7647	>40	1	0	0
Particles >71µm	ASTM D7647	>10	0	0	0
Oil Cleanliness	ISO 4406 (c)	>23/21/16	21/18/15	21/15/11	18/15/11

OIL ANALYSIS REPORT

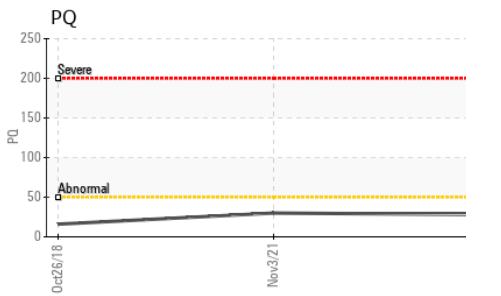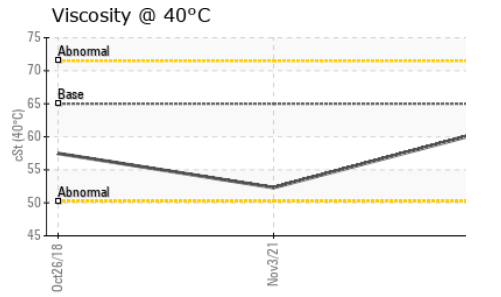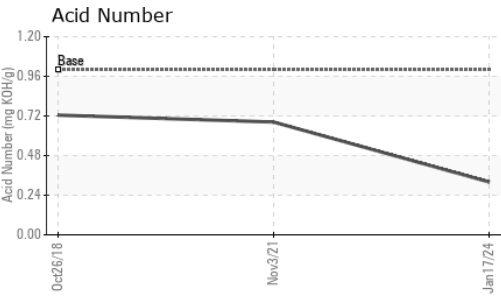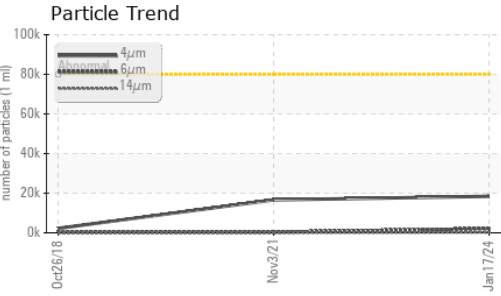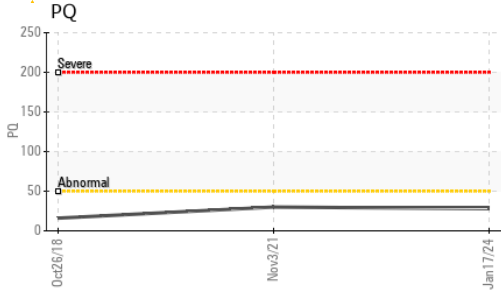


FLUID DEGRADATION	method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.32	0.683	0.725






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	65	60.9	52.3	57.47

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

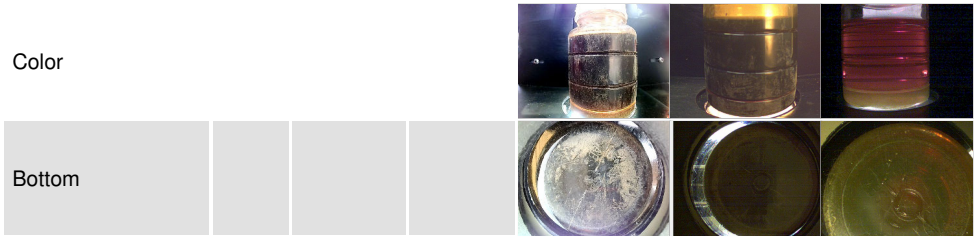

GRAPHS

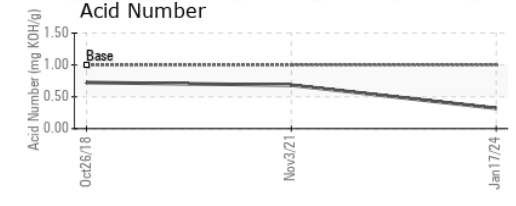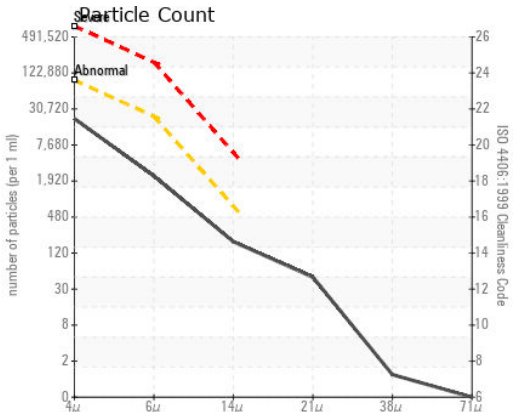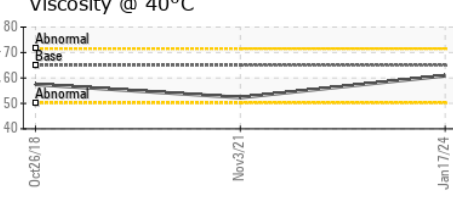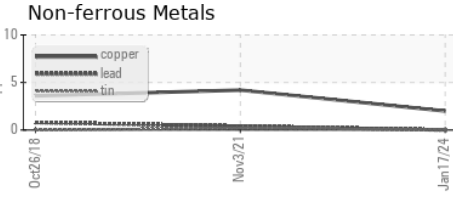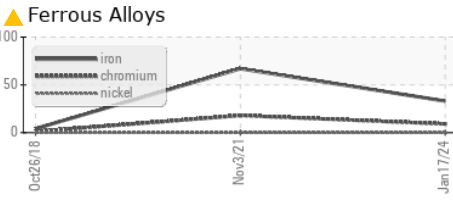

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200205 **Received** : 19 Jan 2024
Lab Number : 06065516 **Diagnosed** : 23 Jan 2024
Unique Number : 10836898 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)