

OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id **150** Component Hydraulic System Fluid AW HYDRAULIC OIL ISO 46 (--- GAL)

DIAGNOSIS

A Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Particle Filter (Magn: 200 x)

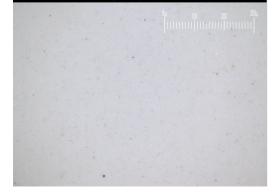

				Jan2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PH0001741		
Sample Date		Client Info		16 Jan 2024		
Machine Age	hrs	Client Info		0		
Oil Age	hrs	Client Info		0		
Oil Changed		Client Info		N/A		
Sample Status				ABNORMAL		
CONTAMINATIO	N	method	limit/base	current	history1	history2
Water		WC Method	>0.05	NEG		
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	0		
Chromium	ppm	ASTM D5185m	>20	0		
Nickel	ppm	ASTM D5185m	>20	0		
Titanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m		0		
Aluminum	ppm	ASTM D5185m	>20	0		
Lead	ppm	ASTM D5185m	>20	0		
Copper	ppm	ASTM D5185m	>20	4		
Tin	ppm	ASTM D5185m	>20	0		
Vanadium	ppm	ASTM D5185m	0	0		
Cadmium	ppm	ASTM D5185m		0		
	PP			-		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0		
Barium	ppm	ASTM D5185m	5	0		
Molybdenum	ppm	ASTM D5185m	5	0		
Manganese	ppm	ASTM D5185m		<1		
Magnesium	ppm	ASTM D5185m	25	79		
Calcium	ppm	ASTM D5185m	200	66		
Phosphorus	ppm	ASTM D5185m	300	299		
Zinc	ppm	ASTM D5185m	370	360		
Sulfur	ppm	ASTM D5185m	2500	1641		
CONTAMINANTS	S	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	2		
Sodium	ppm	ASTM D5185m		0		
Potassium	ppm	ASTM D5185m	>20	0		
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	A 28171		
Particles >6µm		ASTM D7647	>640	1020		
Particles >14µm		ASTM D7647	>80	25		
Particles >21µm		ASTM D7647	>20	7		
Particles >38µm		ASTM D7647	>4	0		
Particles >71µm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>18/16/13	A 22/17/12		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.33		
(/	9 9					


Report Id: HYDFORTX [WUSCAR] 06065578 (Generated: 01/23/2024 15:11:42) Rev: 1

Contact/Location: JACK DAVIS - HYDFORTX



number of particles (per 1

OIL ANALYSIS REPORT

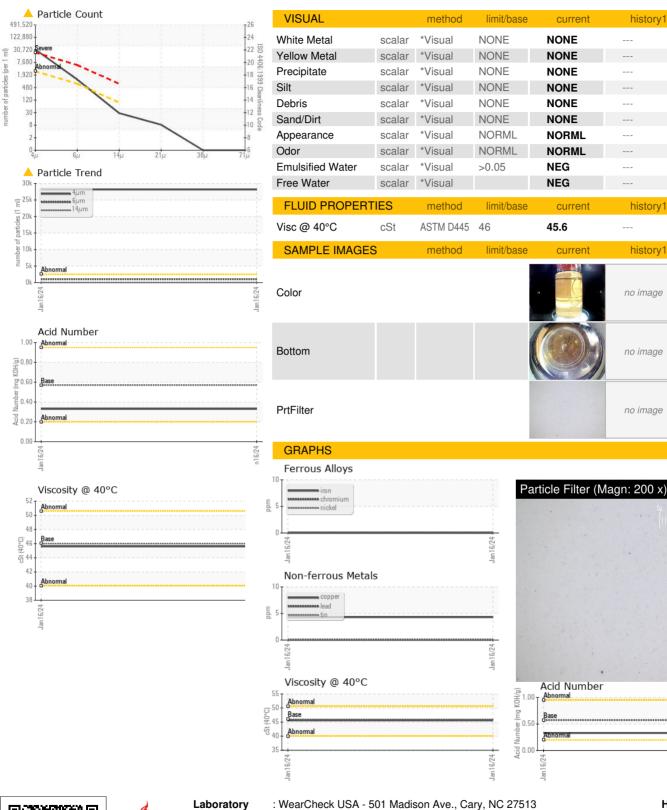

HYDRADYNE LLC 15050 FAA BLVD FORT WORTH, TX US 76155 Contact: JACK DAVIS jdavis@hydradynellc.com T: F:



Test Package : PLANT (Additional Tests: PrtFilter) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369. * - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Recieved

Diagnosed

: 19 Jan 2024

: 23 Jan 2024

Diagnostician : Angela Borella

: PH0001741

: 06065578

: 10836960

Sample No.

Lab Number

Unique Number

history1

history

history1

no image

no image

no image

history2

historv2

history2

no imade

no imade

no image