



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id
9166812 (S/N 1495)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

- Recommendation**
 No corrective action is recommended at this time. Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is a moderate amount of particulates present in the oil.
- Fluid Condition**
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	KC06065601	---	---
Sample Date	Client Info	13 Dec 2023	---	---
Machine Age	hrs Client Info	0	---	---
Oil Age	hrs Client Info	0	---	---
Oil Changed	Client Info	N/A	---	---
Sample Status		ATTENTION	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	0	---	---
Chromium	ppm ASTM D5185m >10	0	---	---
Nickel	ppm ASTM D5185m >3	0	---	---
Titanium	ppm ASTM D5185m >3	0	---	---
Silver	ppm ASTM D5185m >2	0	---	---
Aluminum	ppm ASTM D5185m >10	0	---	---
Lead	ppm ASTM D5185m >10	0	---	---
Copper	ppm ASTM D5185m >50	5	---	---
Tin	ppm ASTM D5185m >10	0	---	---
Vanadium	ppm ASTM D5185m	0	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	0	---	---
Barium	ppm ASTM D5185m 90	40	---	---
Molybdenum	ppm ASTM D5185m	0	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m 90	63	---	---
Calcium	ppm ASTM D5185m 2	6	---	---
Phosphorus	ppm ASTM D5185m	0	---	---
Zinc	ppm ASTM D5185m	3	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	2	---	---
Sodium	ppm ASTM D5185m	22	---	---
Potassium	ppm ASTM D5185m >20	11	---	---
Water	% ASTM D6304 >0.05	0.020	---	---
ppm Water	ppm ASTM D6304 >500	202	---	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	9191	---	---
Particles >6µm	ASTM D7647 >1300	▲ 2376	---	---
Particles >14µm	ASTM D7647 >80	▲ 143	---	---
Particles >21µm	ASTM D7647 >20	20	---	---
Particles >38µm	ASTM D7647 >4	2	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >--/17/13	▲ 20/18/14	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.4	0.29	---	---


OIL ANALYSIS REPORT

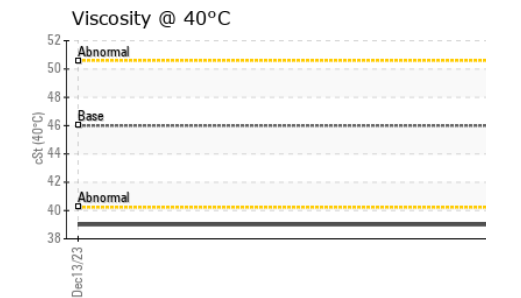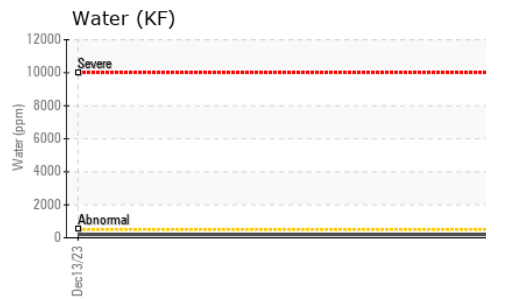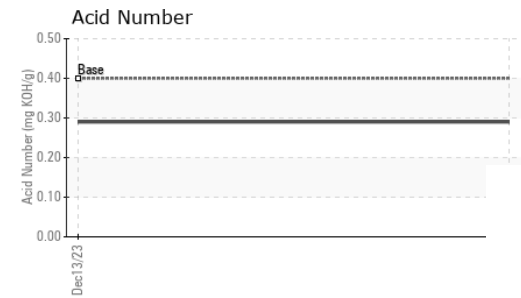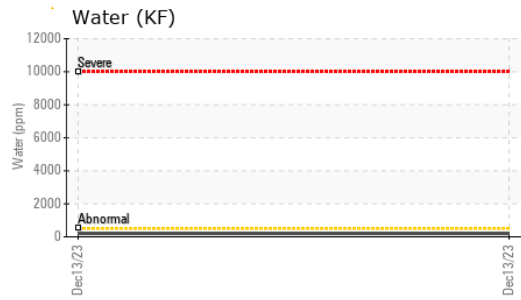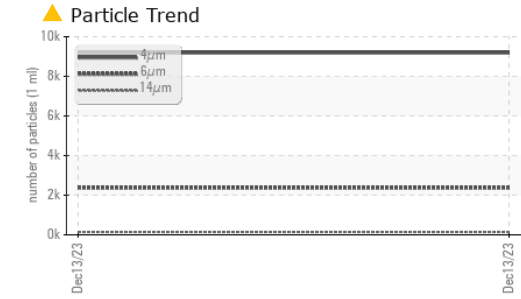





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	39.0	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

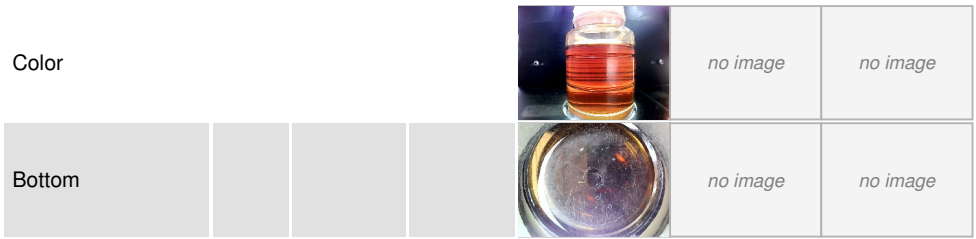

GRAPHS

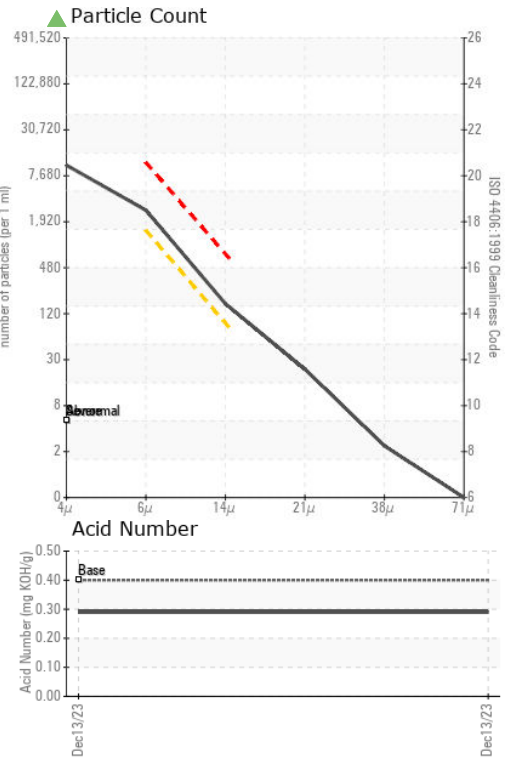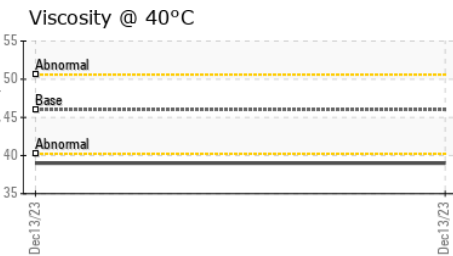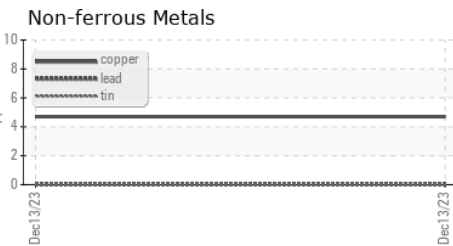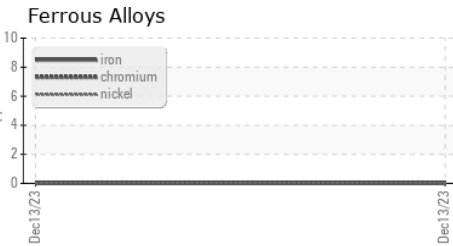

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC06065601 **Received** : 19 Jan 2024
Lab Number : 06065601 **Diagnosed** : 22 Jan 2024
Unique Number : 10836983 **Diagnostician** : Don Baldrige
Test Package : IND 2

DIGITAL ROOM
 435 N MIDLAND AVE
 SADDLE BROOK, NJ
 US 07663
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)