

OIL ANALYSIS REPORT

KAESER SFC 30S 4815731 (S/N 1039)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear


All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





Sample DateClient Info21 Dec 202321 Dec 20221Machine AgehrsClient Info39161354913Oil AgehrsClient Info036803Oil ChangedClient InfoN/AChangedChanged	C96894 4 Jan 2022 1809 347 changed
Sample Date Client Info 21 Dec 2023 21 Dec 2022 1 Machine Age hrs Client Info 39161 35491 3 Oil Age hrs Client Info 0 3680 3 Oil Changed Client Info N/A Changed Client Info Client Info <t< td=""><td>1809 347</td></t<>	1809 347
Oil Age hrs Client Info 0 3680 3 Oil Changed Client Info N/A Changed Changed	347
Oil Age hrs Client Info 0 3680 3 Oil Changed Client Info N/A Changed Changed	
Oil Changed Client Info N/A Changed C	hanged
	IORMAL
WEAR METALS method limit/base current history1	history2
Iron ppm ASTM D5185m >50 0 3	<1
Chromium ppm ASTM D5185m >10 0 0	0
Nickel ppm ASTM D5185m >3 0 0	0
Titanium ppm ASTM D5185m >3 0 0	0
Silver ppm ASTM D5185m >2 0 0	0
Aluminum ppm ASTM D5185m >10 0 <1	<1
Lead ppm ASTM D5185m >10 0 0	0
Copper ppm ASTM D5165m >10 0 0 Copper ppm ASTM D5185m >50 14 3	2
Tin ppm ASTM D5185m >10 0 0	<1
Antimony ppm ASTM D5185m	<1
Vanadium ppm ASTM D5185m O O	0
in the second seco	0
ADDITIVES method limit/base current history1	history2
Boron ppm ASTM D5185m 0 0	0
Barium ppm ASTM D5185m 90 7 0	2
Molybdenum ppm ASTM D5185m 0 0	0
Manganese ppm ASTM D5185m <1 <1	<1
Magnesium ppm ASTM D5185m 90 42 37	47
Calcium ppm ASTM D5185m 2 1 0	0
Phosphorus ppm ASTM D5185m 0 4	1
Zinc ppm ASTM D5185m 5 9	2
CONTAMINANTS method limit/base current history1	history2
Silicon ppm ASTM D5185m >25 0 <1	0
Sodium ppm ASTM D5185m 20 23	25
Potassium ppm ASTM D5185m >20 0 1	4
Water % ASTM D6304 >0.05 0.013 0.015	0.014
ppm Water ppm ASTM D6304 >500 133 150.9	144.7
FLUID CLEANLINESS method limit/base current history1	history2
Particles >4μm ASTM D7647 29014 658	947
Particles >6μm ASTM D7647 >1300 ▲ 5829 184	293
	30
Particles >14μm ASTM D7647 >80 ▲ 404 17	8
Particles >21μm ASTM D7647 >20 Δ 107 5	0
Particles >21μm ASTM D7647 >20 ▲ 107 5 Particles >38μm ASTM D7647 >4 4 0	
Particles >21μm ASTM D7647 >20 ▲ 107 5 Particles >38μm ASTM D7647 >4 4 0	0
Particles >21μm ASTM D7647 >20 ▲ 107 5 Particles >38μm ASTM D7647 >4 4 0 Particles >71μm ASTM D7647 >3 0 0	0




OIL ANALYSIS REPORT





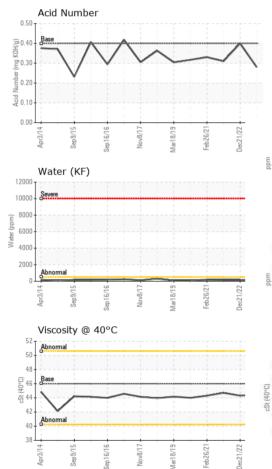

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	44.4	44.3	44.7
SAMPLE IMAGES	S	method	limit/base	current	history1	history2
Color				A.		

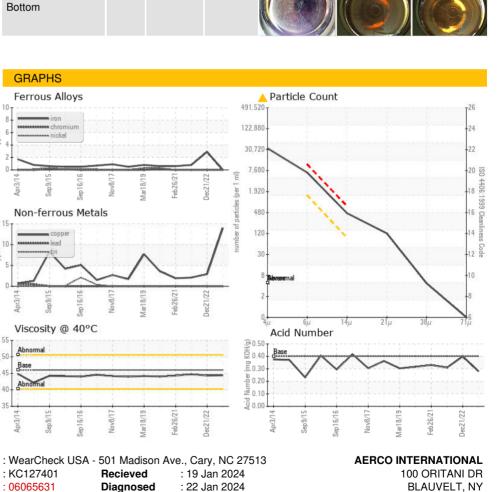



112

: 10837013

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician : Don Baldridge

US 10913

Contact:

Certificate L2367

Mar18/10

Laboratory

Sample No.

Lab Number

Unique Number

^{* -} Denotes test methods that are outside of the ISO 17025 scope of accreditation.