

## **OIL ANALYSIS REPORT**

# Sample Rating Trend

## KAESER ASD 25 4372599 (S/N 1074) Component

Compressor

### KAESER SIGMA (OEM) S-460 (--- GAL)

#### DIAGNOSIS

#### Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.





SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KC102146	KC05982407	KC05929598
Sample Date		Client Info		12 Jan 2024	11 Oct 2023	14 Aug 2023
Machine Age	hrs	Client Info		51462	50362	49659
Oil Age	hrs	Client Info		1100	0	27714
Oil Changed		Client Info		Not Changd	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	0
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	5	2	10
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m	90	0	3	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	90	37	51	2
Calcium	ppm	ASTM D5185m	2	<1	0	0
Phosphorus	ppm	ASTM D5185m		2	<1	<1
Zinc	ppm	ASTM D5185m		26	18	14
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	0	0
Sodium	ppm	ASTM D5185m		14	16	1
Potassium	ppm	ASTM D5185m	>20	0	2	0
Water	%	ASTM D6304	>0.05	0.031	0.030	0.009
ppm Water	ppm	ASTM D6304	>500	319	309.4	94.8
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		29342	5574	1989
Particles >6µm		ASTM D7647	>1300	<u> </u>	<b>2249</b>	503
Particles >14µm		ASTM D7647	>80	<b>4</b> 940	<b>2</b> 74	42
Particles >21µm		ASTM D7647	>20	<u> </u>	<b>A</b> 85	14
Particles >38µm		ASTM D7647	>4	4	3	1
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	<b>A</b> 22/21/17	▲ 20/18/15	18/16/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.37	0.40	0.35



# **OIL ANALYSIS REPORT**







1000

600

4000

200

52

5

4 cSt (40°C) 4


4

Abnorm 4(

Dec 1

Abnorma


Water (ppm)

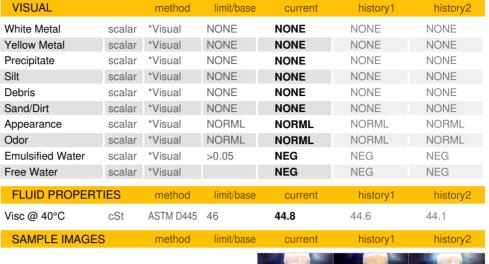

Color



Bottom

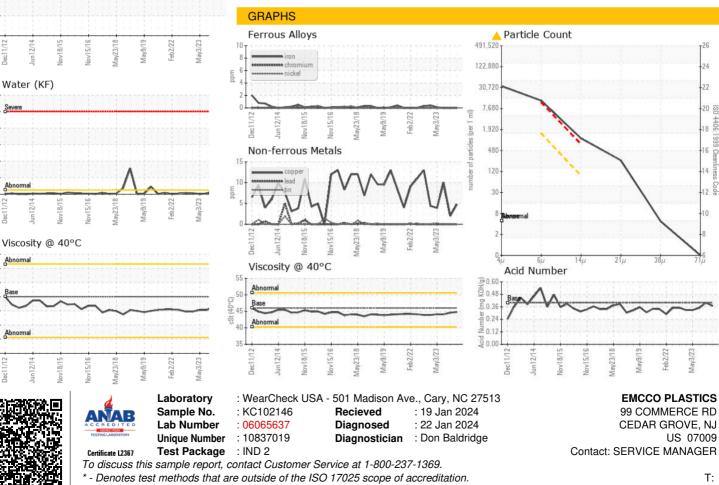

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: SERVICE MANAGER - EMCCED