

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR



KAESER 5745746

Component

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

The aluminum level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


			May2020	Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006533	KC88389	
Sample Date		Client Info		10 Jan 2024	27 May 2020	
Machine Age	hrs	Client Info		27086	15543	
Oil Age	hrs	Client Info		0	15543	
Oil Changed		Client Info		N/A	Not Changd	
Sample Status				ABNORMAL	ABNORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	45	
Chromium	ppm	ASTM D5185m	>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	<u> </u>	13	
Lead	ppm	ASTM D5185m	>10	0	5	
Copper	ppm	ASTM D5185m		7	9	
Tin	ppm	ASTM D5185m	>10	0	0	
Antimony	ppm	ASTM D5185m			0	
Vanadium	ppm	ASTM D5185m		0	<1	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m		1	6	
Molybdenum	ppm	ASTM D5185m		0	0	
Manganese	ppm	ASTM D5185m		<1	<1	
Magnesium	ppm	ASTM D5185m		6	11	
Calcium	ppm	ASTM D5185m		<1	0	
Phosphorus	ppm	ASTM D5185m	500	534	320	
Zinc	ppm	ASTM D5185m	300	196	150	
Sulfur	ppm	ASTM D5185m		2718	5369	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm		>25	0	<1	
Sodium	ppm	ASTM D5185m		2	1	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.05	0.023	0.011	
ppm Water	ppm	ASTM D6304	>500	234	118.2	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		73444	183695	
Particles >6µm		ASTM D7647	>1300	<u>^</u> 26281	<u>▲</u> 102184	
Particles >14µm		ASTM D7647	>80	<u> </u>	<u>^</u> 7783	
Particles >21µm		ASTM D7647	>20	<u>▲</u> 321	<u>▲</u> 1032	
Particles >38µm		ASTM D7647	>4	<u>^</u> 23	<u> </u>	
Particles >71µm		ASTM D7647	>3	1	0	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>23/22/17</u>	<u>4</u> 24/20	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2



OIL ANALYSIS REPORT

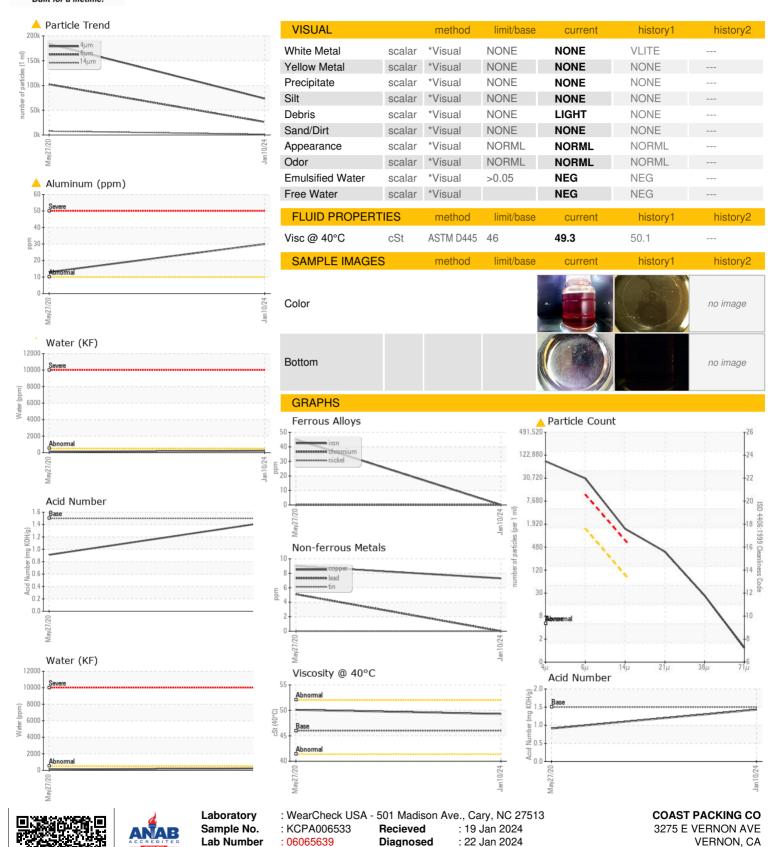

Diagnostician : Don Baldridge



Certificate L2367

Unique Number

: 10837021

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 90058

T: F:

Contact: Service Manager