

# **OIL ANALYSIS REPORT**

Sample Rating Trend



MTC-3 (S/N 2714)

#### Component Refrigeration Compressor

VILTER 717 COMPRESSOR OIL ISO 68 (--- GAL)

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

## Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		USP0004866	USP0001446	
Sample Date		Client Info		11 Jan 2024	02 Oct 2023	
Machine Age	hrs	Client Info		146463	144237	
Oil Age	hrs	Client Info		0	0	
Oil Changed		Client Info		N/A	N/A	
Sample Status				NORMAL	ABNORMAL	
		and the set	1	-	-	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>8	0	0	
Chromium	ppm	ASTM D5185m	>2	0	0	
Nickel	ppm	ASTM D5185m		0	0	
Titanium	ppm	ASTM D5185m		0	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>3	0	<1	
Lead	ppm	ASTM D5185m	>2	0	0	
Copper	ppm	ASTM D5185m	>8	<1	0	
Tin	ppm	ASTM D5185m	>4	0	0	
Vanadium	ppm	ASTM D5185m		<1	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	0	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	0	0	0	
Calcium	ppm	ASTM D5185m	0	<1	0	
Phosphorus	ppm	ASTM D5185m	0	0	0	
Zinc	ppm	ASTM D5185m	0	0	0	
Sulfur	ppm	ASTM D5185m		9	0	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	0	
Sodium	ppm	ASTM D5185m		0	0	
Potassium	ppm	ASTM D5185m	>20	0	0	
Water	%	ASTM D6304	>0.01	0.003	0.001	
ppm Water	ppm	ASTM D6304	>100	26	0.00	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	4307	<b>4</b> 1229	
Particles >6µm		ASTM D7647	>2500	695	<b>4</b> 9613	
Particles >14µm		ASTM D7647	>320	40	218	
Particles >21µm		ASTM D7647	>80	11	30	
Particles >38µm		ASTM D7647	>20	0	0	
Particles >71µm		ASTM D7647	>4	0	0	
Oil Cleanliness		ISO 4406 (c)	>20/18/15	19/17/12	A 23/20/15	
FLUID DEGRADA		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D974		0.013	0.013	
	ing non ng		U.L	0.010	0.010	



Water (KF)

250

200 Ē 150

5

n

80

7

0,7 성 65

60

50

Ê 40

. 응 30

5 201

10

A 55

Water 100

# **OIL ANALYSIS REPORT**

scalar

scalar

scalar

scalar

scalar

White Metal

Yellow Metal

Precipitate

Silt

Debris

Sand/Dirt

\*Visual

\*Visual

\*Visua

\*Visual

\*Visual


scalar \*Visual


NONE


LIGHT

NONE

NONE

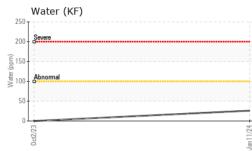

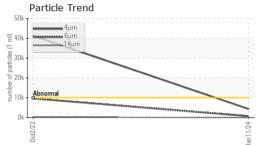

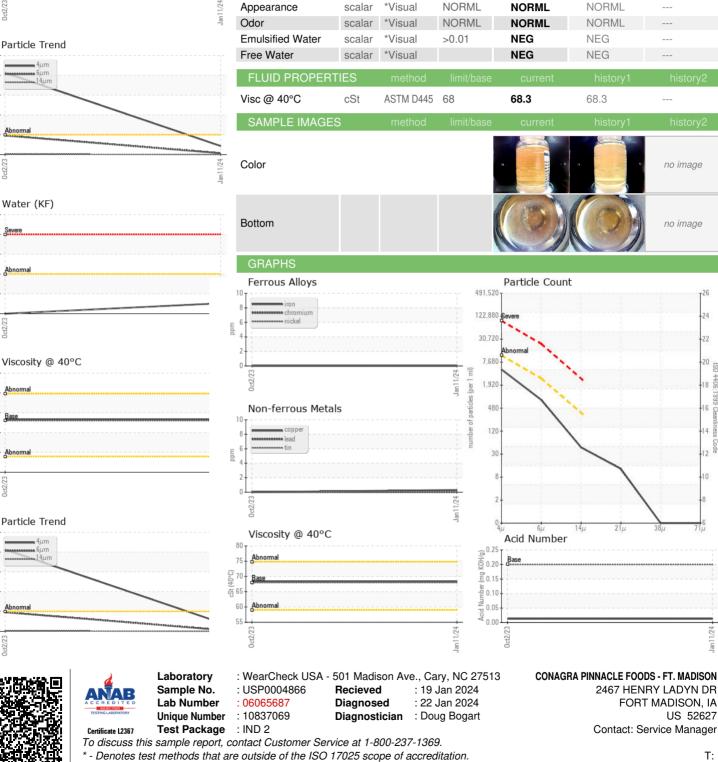

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact/Location: Service Manager - CAGFOR

T:

F:

4406

:1999 Cle

14