




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**211**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

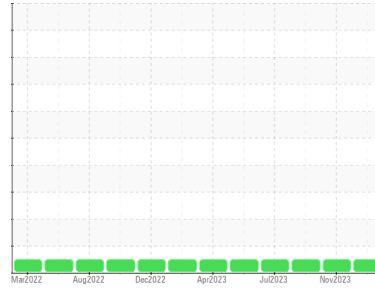

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>SBP0000847</b>	SBP0003813	SBP0000848
Sample Date	Client Info		<b>13 Dec 2023</b>	08 Nov 2023	11 Sep 2023
Machine Age	hrs	Client Info	<b>10000</b>	9746	9405
Oil Age	hrs	Client Info	<b>254</b>	341	310
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>200	<b>&lt;1</b>	<1	1
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	0
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>2</b>	2	0
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>56</b>	56	59
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>939</b>	941	992
Calcium	ppm	ASTM D5185m	1070	<b>1019</b>	1010	1064
Phosphorus	ppm	ASTM D5185m	1150	<b>1043</b>	1031	1019
Zinc	ppm	ASTM D5185m	1270	<b>1240</b>	1240	1243
Sulfur	ppm	ASTM D5185m	2060	<b>3072</b>	3045	3199

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>20	<b>3</b>	2	3
Sodium	ppm	ASTM D5185m		<b>2</b>	2	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0.1	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>5.7</b>	5.8	5.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.6</b>	17.6	17.5

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.6</b>	13.6	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>8.8</b>	8.7	8.9







# OIL ANALYSIS REPORT

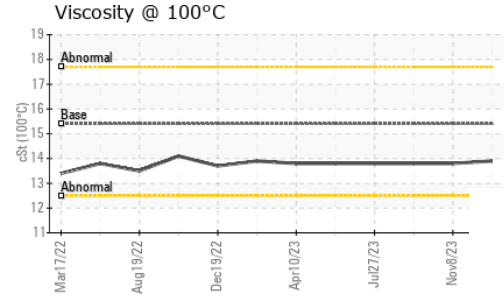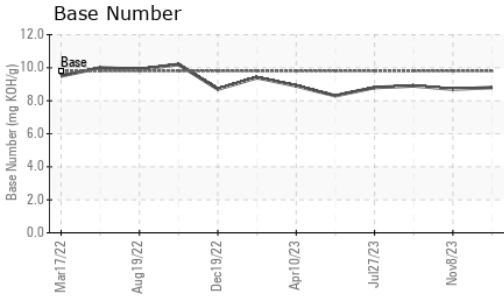

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.9</b>	13.8	13.8

## GRAPHS

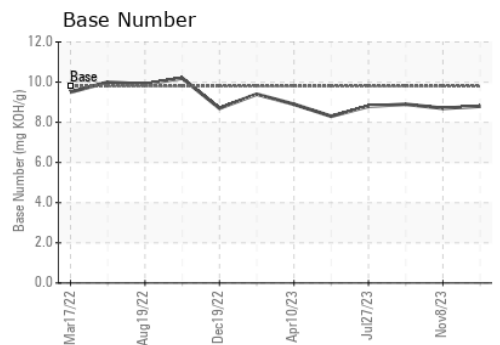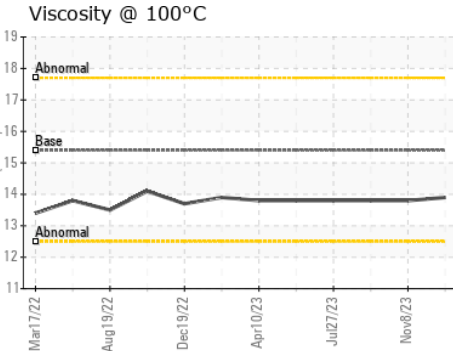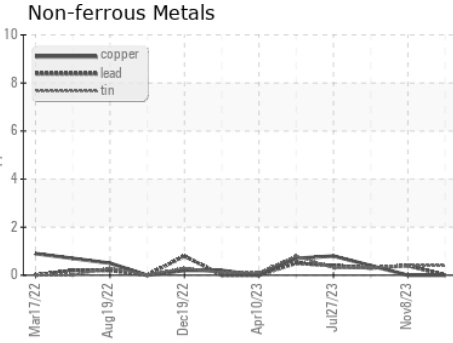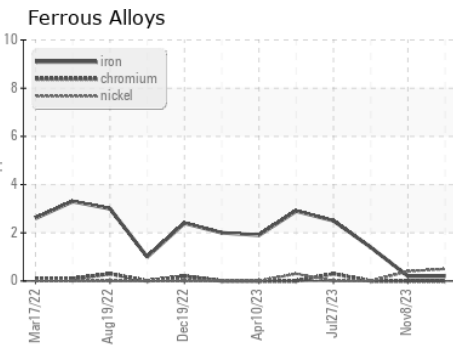

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0000847 **Recieved** : 30 Jan 2024  
**Lab Number** : **06073648** **Diagnosed** : 30 Jan 2024  
**Unique Number** : 10850325 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**Western Sand and Gravel - 604602**  
 248 CO Road G  
 Ashland, NE  
 US 68003  
 Contact: ZACH SPURLOCK  
 zachs@westernsand.com  
 T: (402)944-3084  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)