




OIL ANALYSIS REPORT

Sample Rating Trend

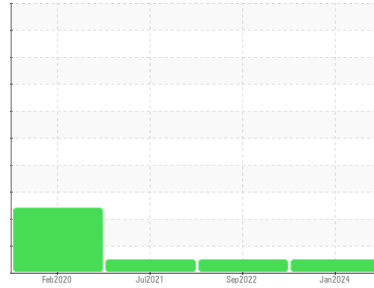

NORMAL



Machine Id
4920818

Component
Diesel Engine

Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			IL06073758	IL05643493	IL05330599
Sample Date	Client Info			29 Jan 2024	15 Sep 2022	23 Jul 2021
Machine Age	mls	Client Info		0	0	28204
Oil Age	mls	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	0.1
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	40	30	88
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>4	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	6	6	17
Lead	ppm	ASTM D5185m	>40	2	1	5
Copper	ppm	ASTM D5185m	>330	3	15	131
Tin	ppm	ASTM D5185m	>15	1	1	5
Antimony	ppm	ASTM D5185m		---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	250	24	19	16
Barium	ppm	ASTM D5185m	10	0	<1	0
Molybdenum	ppm	ASTM D5185m	100	50	45	47
Manganese	ppm	ASTM D5185m		<1	<1	2
Magnesium	ppm	ASTM D5185m	450	489	539	526
Calcium	ppm	ASTM D5185m	3000	1625	1642	1635
Phosphorus	ppm	ASTM D5185m	1150	691	756	695
Zinc	ppm	ASTM D5185m	1350	930	942	908
Sulfur	ppm	ASTM D5185m	4250	2469	2513	1802



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	7	7	14
Sodium	ppm	ASTM D5185m		0	1	4
Potassium	ppm	ASTM D5185m	>20	4	0	10

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	2	1.3	2
Nitration	Abs/cm	*ASTM D7624	>20	12.4	12.8	16.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	26.2	26.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.5	24.2	25
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	11.3	10.9	8.6







OIL ANALYSIS REPORT

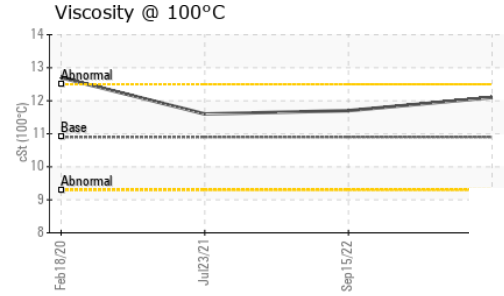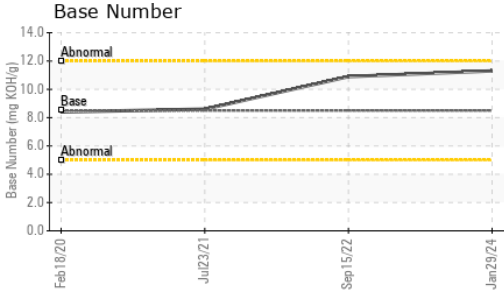

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	10.9	12.1	11.7	11.6

GRAPHS

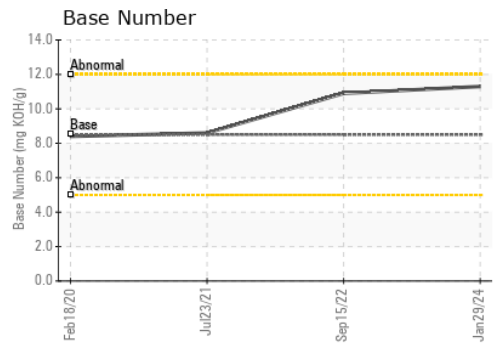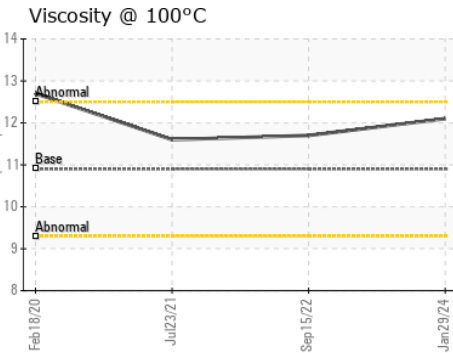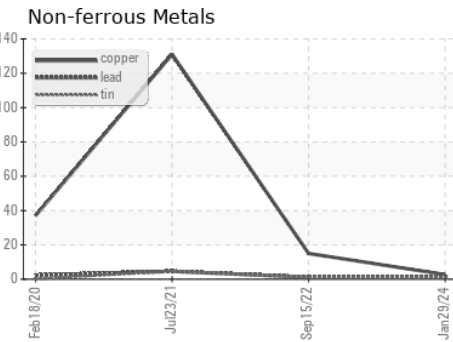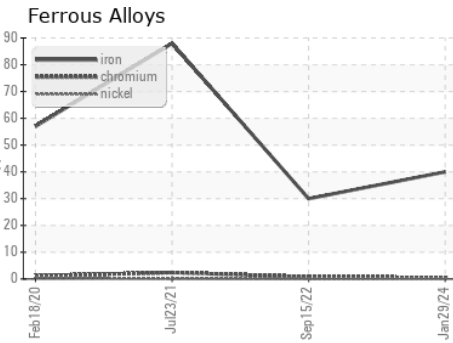

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL06073758 **Received** : 30 Jan 2024
Lab Number : **06073758** **Diagnosed** : 31 Jan 2024
Unique Number : 10855849 **Diagnostician** : Wes Davis
Test Package : FLEET

IDEALASE-NORCROSS
 4571 NORTH BUFORD HWY
 NORCROSS, GA
 US 30071-2808
 Contact: RICK MARKS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (770)300-0614