

OIL ANALYSIS REPORT

KAESER AS 30T 3059551 (S/N 1109)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear


All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.



SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010800	KCP40350D	KCP49661
Sample Date		Client Info		18 Dec 2023	27 Dec 2022	20 Jul 2022
Machine Age	hrs	Client Info		35391	35003	32232
Oil Age	hrs	Client Info		0	3000	220
Oil Changed		Client Info		N/A	Changed	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
-						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	1
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	0	2
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	3	13	11
Tin	ppm	ASTM D5185m	>10	0	0	1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
	ррш			-	-	-
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	<1
Barium	ppm	ASTM D5185m	90	0	<1	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	90	33	9	10
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	4	8
Zinc	ppm	ASTM D5185m		32	18	8
Sulfur	ppm	ASTM D5185m		17693	21083	21767
CONTAMINANTS	i	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		17	5	4
Potassium	ppm	ASTM D5185m	>20	<1	0	<1
Water	%	ASTM D6304	>0.05	0.012	▲ 0.050	0.011
ppm Water	ppm	ASTM D6304	>500	127	▲ 509.0	117.1
FLUID CLEANLIN	IFSS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647				74029
Particles >6µm		ASTM D7647 ASTM D7647	>1300			▲ 33007
		ASTM D7647 ASTM D7647				▲ 33007 ▲ 4614
Particles >14µm						
Particles >21µm		ASTM D7647				▲ 1458
Particles >38µm		ASTM D7647	>4			<u>▲</u> 24
Particles >71µm		ASTM D7647				1
Oil Cleanliness		ISO 4406 (c)	>/17/13			<u> </u>
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	ma KOH/a	ASTM D8045	04	0.33	0.33	0.35

Acid Number (AN)


mg KOH/g ASTM D8045 0.4


0.33 0.33 0.35 Contact/Location: ACCOUNTS PAYABLE - POMOSH


Page 1 of 2



OIL ANALYSIS REPORT








VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	🔺 MODER	🔺 MODER	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.7	43.6	43.8
SAMPLE IMAGES		method	limit/base	current	history1	history2

Color



Bottom

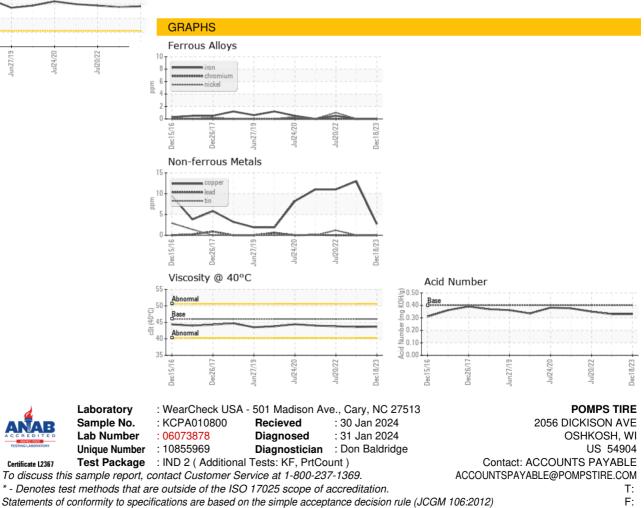

Certificate L2367