

# **OIL ANALYSIS REPORT**

Sample Rating Trend

ISO



8124227 (S/N 1033)

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

## **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.


#### **Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Dec2022	Sep2023		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA000719	KCP55693	
Sample Date		Client Info		12 Sep 2023	13 Dec 2022	
Machine Age	hrs	Client Info		12780	6604	
Oil Age	hrs	Client Info		0	6604	
Oil Changed	0	Client Info		N/A	Changed	
Sample Status				ABNORMAL	ATTENTION	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	
Chromium	ppm		>10	0	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m		<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m		0	1	
Lead	ppm	ASTM D5185m	>10	0	0	
Copper	ppm	ASTM D5185m		14	15	
Tin		ASTM D5185m	>10	0	0	
Vanadium	ppm	ASTM D5185m	>10	0	0	
Cadmium	ppm			0	0	
	ppm	ASTM D5185m				
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	
Barium	ppm	ASTM D5185m	90	0	0	
Molybdenum	ppm	ASTM D5185m	0	0	0	
Manganese	ppm	ASTM D5185m		0	0	
Magnesium	ppm	ASTM D5185m	100	0	<1	
Calcium	ppm	ASTM D5185m	0	0	0	
Phosphorus	ppm	ASTM D5185m	0	0	7	
Zinc	ppm	ASTM D5185m	0	0	<1	
Sulfur	ppm	ASTM D5185m	23500	17358	18845	
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	
Sodium	ppm	ASTM D5185m		<1	0	
Potassium	ppm	ASTM D5185m	>20	0	<1	
Water	%	ASTM D6304	>0.05	0.005	0.003	
ppm Water	ppm	ASTM D6304	>500	58	38.9	
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		8277	5563	
Particles >6µm		ASTM D7647	>1300	<u>^</u> 2097	<b>1</b> 567	
Particles >14μm		ASTM D7647	>80	<b>163</b>	<b>1</b> 15	
Particles >21µm		ASTM D7647	>20	<b>45</b>	<b>△</b> 36	
Particles >38µm		ASTM D7647	>4	3	4	
Particles >71μm		ASTM D7647	>3	0	1	
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>^</u> 20/18/15	▲ 20/18/14	
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.49	0.46	



## **OIL ANALYSIS REPORT**

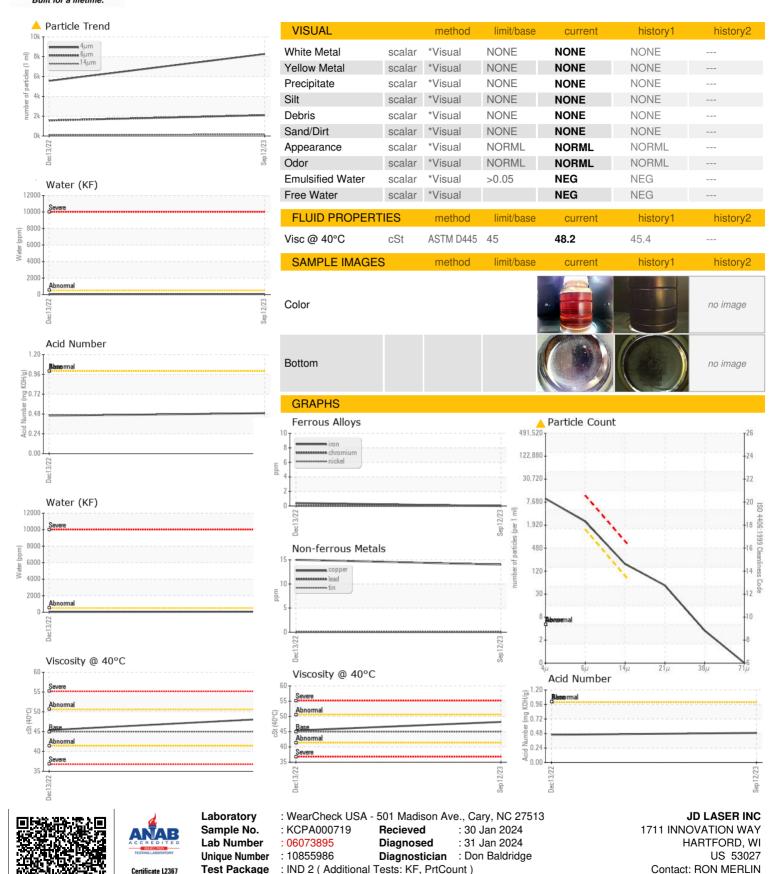

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RON.MERLIN@JDLASERINC.COM

T: F: