


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

KAESER 6673829

Component

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Apr2020	Dec2020 Dec2021	Oct2022 Apr2023	Dec2023	
SAMPLE INFORM	IATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA011284	KC111655	KC107571
Sample Date		Client Info		29 Dec 2023	28 Apr 2023	14 Oct 2022
Machine Age	hrs	Client Info		19249	15545	12378
Oil Age	hrs	Client Info		0	3168	3100
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	<1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	<1	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	<1	0
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	11	5	10
Tin	ppm	ASTM D5185m	>10	0	<1	0
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	0	33	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m	100	10	51	32
Calcium	ppm	ASTM D5185m	0	0	2	<1
Phosphorus	ppm	ASTM D5185m	0	0	2	5
Zinc	ppm	ASTM D5185m	0	8	5	20
Sulfur	ppm	ASTM D5185m	23500	16192	22829	18069
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	4	4	6
Sodium	ppm	ASTM D5185m		8	29	22
Potassium	ppm	ASTM D5185m	>20	0	4	4
Water	%	ASTM D6304	>0.05	0.010	0.019	0.021
ppm Water	ppm	ASTM D6304	>500	107	192.5	212.8
FLUID CLEANLINI	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		17281	8934	2799
Particles >6µm		ASTM D7647	>1300	<u>4721</u>	2977	960
Particles >14µm		ASTM D7647	>80	152	<u> </u>	66
Particles >21µm		ASTM D7647	>20	<u> </u>	<u>^</u> 22	17
Particles >38µm		ASTM D7647	>4	0	1	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>/17/13	2 1/19/14	<u>^</u> 20/19/15	19/17/13
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

Acid Number (AN)

mg KOH/g ASTM D8045 1.0

Contact/Location: Service Manager - BAYWRI


0.31

0.33

0.23



OIL ANALYSIS REPORT

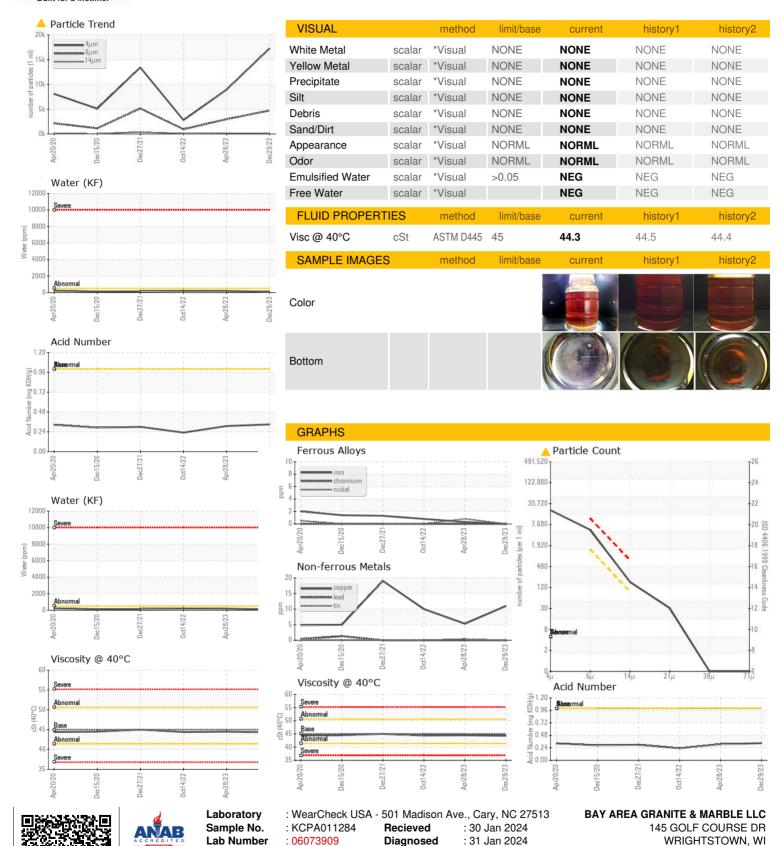

Unique Number

: 10856000

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Diagnostician : Don Baldridge

US 54180

T: F:

Contact: Service Manager