

## **OIL ANALYSIS REPORT**


Sample Rating Trend



# KAESER SK19 1420907 (S/N 01814514)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)



### **DIAGNOSIS**

#### Recommendation

No corrective action is recommended at this time. We recommend you service the filters on this component. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### **Fluid Condition**


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Oct2017	Feb2019	Jun2021 Aug2022	Sep 2023	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007828	KCP49754	KCP33963
Sample Date		Client Info		26 Sep 2023	01 Aug 2022	16 Jun 2021
Machine Age	hrs	Client Info		28540	27199	26339
Oil Age	hrs	Client Info		0	1000	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	<1	2
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m	>3	0	0	<1
Titanium	ppm	ASTM D5185m	>3	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	0	<1	<1
Lead	ppm	ASTM D5185m	>10	<1	2	4
Copper	ppm	ASTM D5185m	>50	<1	<1	2
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	<1
Barium	ppm	ASTM D5185m	90	0	6	0
Molybdenum	ppm	ASTM D5185m	0	0	<1	0
Manganese	ppm	ASTM D5185m		<1	1	1
Magnesium	ppm	ASTM D5185m	100	62	70	49
Calcium	ppm	ASTM D5185m	0	0	8	2
Phosphorus	ppm	ASTM D5185m	0	0	4	0
Zinc	ppm	ASTM D5185m	0	3	19	29
Sulfur	ppm	ASTM D5185m	23500	19434	22331	20295
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	2	5
Sodium	ppm	ASTM D5185m		15	18	25
Potassium	ppm	ASTM D5185m	>20	1	2	3
Water	%	ASTM D6304	>0.05	0.019	0.014	0.035
ppm Water	ppm	ASTM D6304	>500	193	148.2	353.6
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		24782	143058	144644
Particles >6µm		ASTM D7647	>1300	<b>^</b> 7809	<b>4</b> 0073	<u>▲</u> 57463
Particles >14μm		ASTM D7647	>80	<b>△</b> 326	<u> </u>	<u>4154</u>
Particles >21µm		ASTM D7647	>20	<b>43</b>	<u>\$\text{\scale}\$</u> 285	<u>▲</u> 713
Particles >38μm		ASTM D7647	>4	2	<u>6</u>	<b>△</b> 35
Particles >71µm		ASTM D7647	>3	0	0	1
Oil Cleanliness		ISO 4406 (c)	>/17/13	<u>22/20/16</u>	<u>4</u> 24/23/18	<u>△</u> 23/19
FLUID DEGRADA	TION	method	limit/base	current	history1	history2

0.328



## **OIL ANALYSIS REPORT**

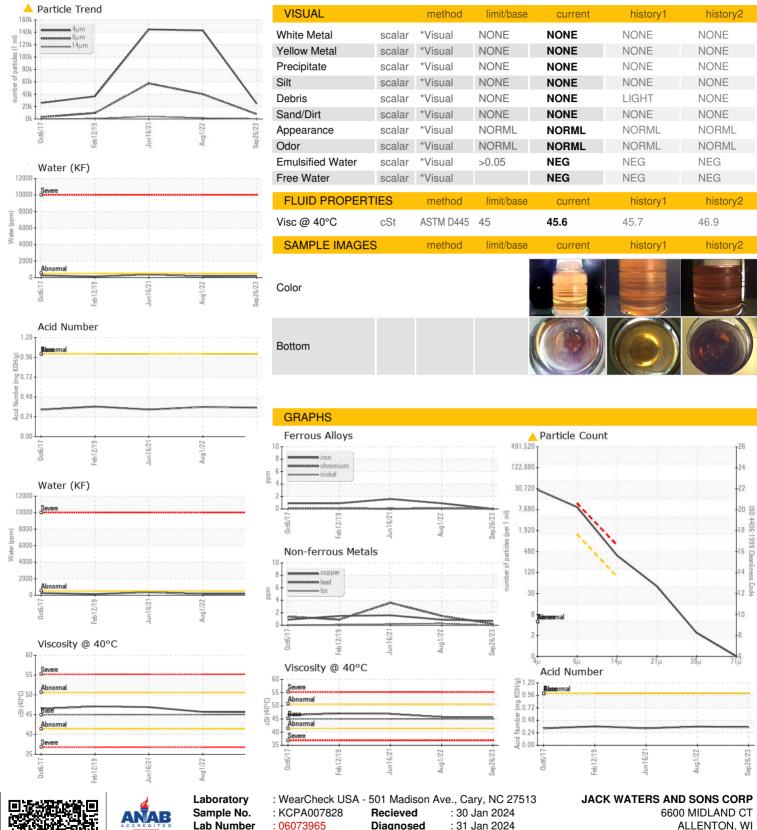





Certificate L2367

Lab Number **Unique Number** 

Test Package

: 06073965

: 10856056

Diagnosed Diagnostician : Angela Borella

: 31 Jan 2024 : IND 2 ( Additional Tests: KF, PrtCount )

US 53002

Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: F: