


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



KAESER SFC 11T 3713933 (S/N 1028)

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Aug 2017 Au	g2017 Aug2017 Sep2018	Oct2019 Sep2020 Sep2021 Oct202	72 Oct/073	
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA006469	KCP46971D	KCP11918
Sample Date		Client Info		30 Oct 2023	12 Oct 2022	09 Sep 2021
Machine Age	hrs	Client Info		24280	27197	24768
Oil Age	hrs	Client Info		0	2500	3000
Oil Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	20	2
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	0	0	3
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	<1	2
Tin	ppm	ASTM D5185m	>10	0	0	0
Antimony	ppm	ASTM D5185m				0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	2
Barium	ppm	ASTM D5185m	90	0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	90	32	51	15
Calcium	ppm	ASTM D5185m	2	0	0	0
Phosphorus	ppm	ASTM D5185m		0	2	3
Zinc	ppm	ASTM D5185m		19	14	30
Sulfur	ppm	ASTM D5185m		18981	20838	17218
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<1	<1	0
Sodium	ppm	ASTM D5185m		14	26	4
Potassium	ppm	ASTM D5185m	>20	1	3	1
Water	%	ASTM D6304	>0.05	0.013	0.023	△ 0.249
ppm Water	ppm	ASTM D6304	>500	130	234.8	<u>^</u> 2490
FLUID CLEANLI	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647		2004		
Particles >6µm		ASTM D7647	>1300	565		
Particles >14μm		ASTM D7647	>80	39		
Particles >21μm		ASTM D7647	>20	11		
Particles >38µm		ASTM D7647	>4	1		
Particles >71μm		ASTM D7647	>3	0		
Oil Cleanliness		ISO 4406 (c)	>17/13	16/12		
FLUID DEGRAD	ATION	method	limit/base	current	history1	history2

0.30



OIL ANALYSIS REPORT

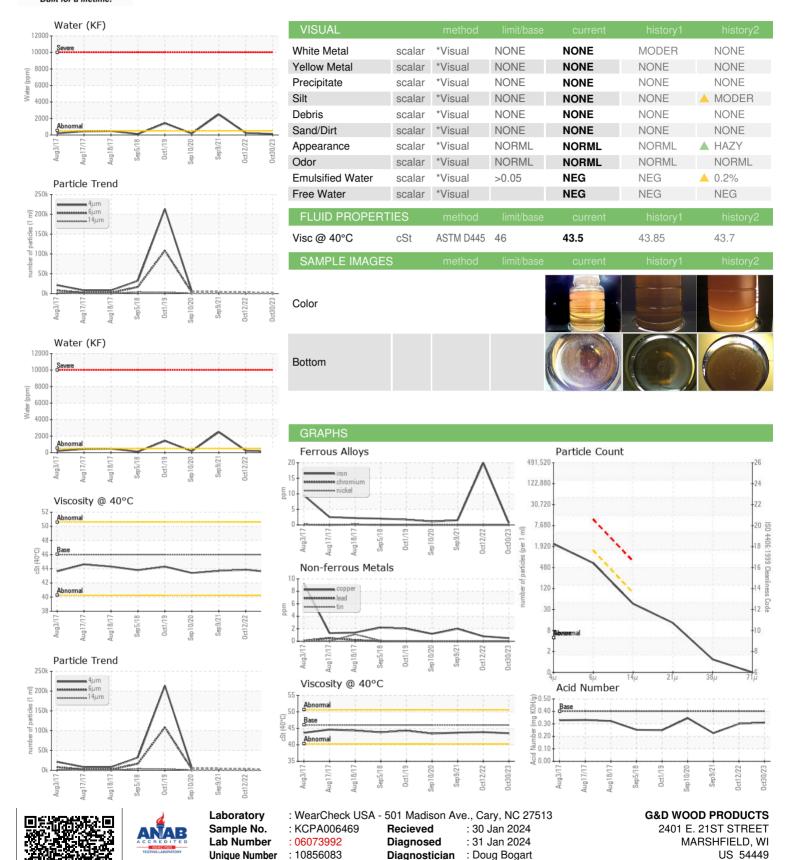

Test Package : IND 2 (Additional Tests: KF, PrtCount)

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Certificate L2367

T: F:

Contact: SERVICE MANAGER