




OIL ANALYSIS REPORT

Sample Rating Trend

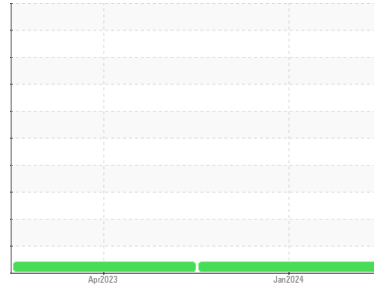

VISCOSITY



Machine Id
HC-2205
 Component
Left Planetary
 Fluid
GEAR OIL ISO 220 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is higher than normal. Confirm oil type.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0873315	WC0746707	---
Sample Date	Client Info			10 Jan 2024	01 Apr 2023	---
Machine Age	hrs	Client Info		7825	7349	---
Oil Age	hrs	Client Info		0	989	---
Oil Changed	Client Info			Changed	Changed	---
Sample Status				ATTENTION	ATTENTION	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	12	31	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	1	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	2	3	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>75	1	2	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		0	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	6	8	---
Barium	ppm	ASTM D5185m	15	0	0	---
Molybdenum	ppm	ASTM D5185m	15	<1	0	---
Manganese	ppm	ASTM D5185m		0	<1	---
Magnesium	ppm	ASTM D5185m	50	<1	<1	---
Calcium	ppm	ASTM D5185m	50	5	8	---
Phosphorus	ppm	ASTM D5185m	350	359	415	---
Zinc	ppm	ASTM D5185m	100	0	0	---
Sulfur	ppm	ASTM D5185m	12500	5656	8020	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	7	20	---
Sodium	ppm	ASTM D5185m		0	1	---
Potassium	ppm	ASTM D5185m	>20	2	3	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---






OIL ANALYSIS REPORT

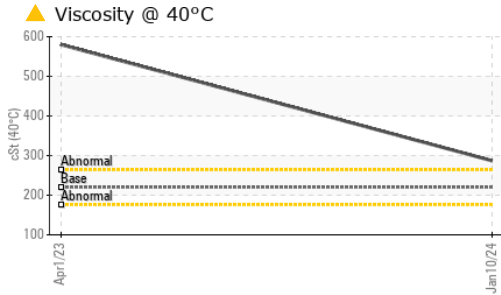

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 220	▲ 287	▲ 580	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image		no image
Bottom			no image		no image

GRAPHS

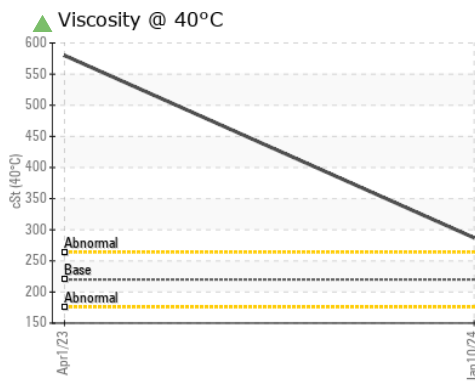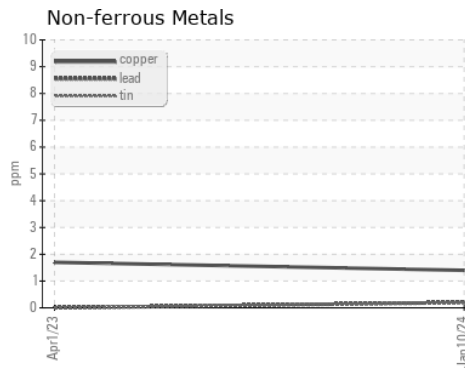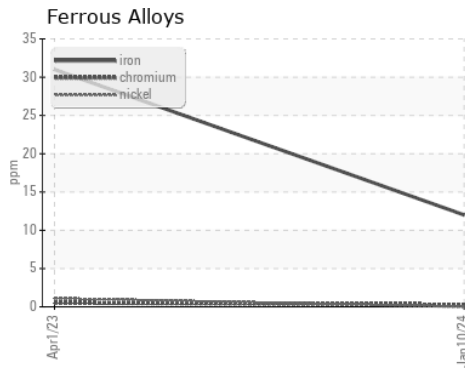

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0873315 **Received** : 30 Jan 2024
Lab Number : 06074191 **Diagnosed** : 31 Jan 2024
Unique Number : 10856282 **Diagnostician** : Sean Felton
Test Package : CONST

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCKNER HEAVY LIFT

4732 NC 54 EAST
GRAHAM, NC
US 27253-9215

Contact: MICHAEL LAWSON
michaell@bucknercompanies.com

T: (336)376-8888
F: (336)376-4090