

OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL



Area
TRUCK
Machine Id
16
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)



DIAGNOSIS

Recommendation
Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear
All component wear rates are normal.

Contamination
There is no indication of any contamination in the oil.

Fluid Condition
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		RLB0000025	---	---
Sample Date	Client Info		10 Jan 2024	---	---
Machine Age	mls Client Info		531331	---	---
Oil Age	mls Client Info		10000	---	---
Oil Changed	Client Info		Changed	---	---
Sample Status			NORMAL	---	---

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	---	---
Water	WC Method	>0.2	NEG	---	---
Glycol	WC Method		NEG	---	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m	>80	6	---	---
Chromium	ppm ASTM D5185m	>5	<1	---	---
Nickel	ppm ASTM D5185m	>2	<1	---	---
Titanium	ppm ASTM D5185m		0	---	---
Silver	ppm ASTM D5185m	>3	<1	---	---
Aluminum	ppm ASTM D5185m	>30	4	---	---
Lead	ppm ASTM D5185m	>30	0	---	---
Copper	ppm ASTM D5185m	>150	1	---	---
Tin	ppm ASTM D5185m	>5	0	---	---
Vanadium	ppm ASTM D5185m		<1	---	---
Cadmium	ppm ASTM D5185m		0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	250	2	---	---
Barium	ppm ASTM D5185m	10	0	---	---
Molybdenum	ppm ASTM D5185m	100	60	---	---
Manganese	ppm ASTM D5185m		<1	---	---
Magnesium	ppm ASTM D5185m	450	952	---	---
Calcium	ppm ASTM D5185m	3000	1071	---	---
Phosphorus	ppm ASTM D5185m	1150	1017	---	---
Zinc	ppm ASTM D5185m	1350	1295	---	---
Sulfur	ppm ASTM D5185m	4250	3037	---	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m	>20	5	---	---
Sodium	ppm ASTM D5185m	>158	3	---	---
Potassium	ppm ASTM D5185m	>20	3	---	---



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm *ASTM D7624	>20	7.2	---	---
Sulfation	Abs/.1mm *ASTM D7415	>30	19.6	---	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	15.1	---	---
Base Number (BN)	mg KOH/g ASTM D2896	8.5	8.7	---	---





OIL ANALYSIS REPORT

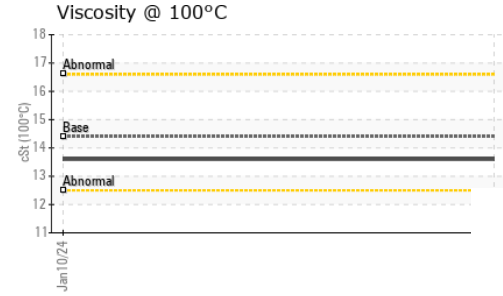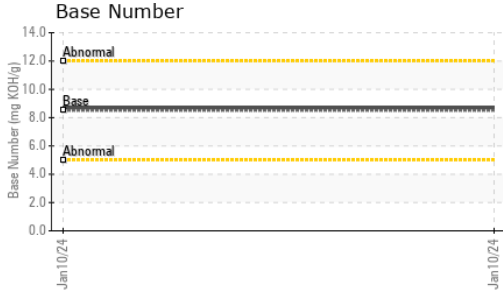

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.6	---

GRAPHS

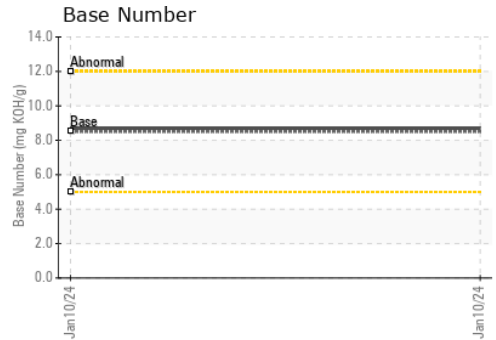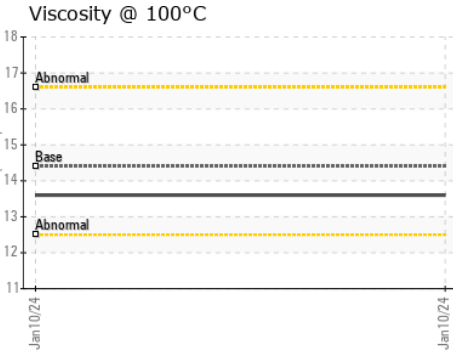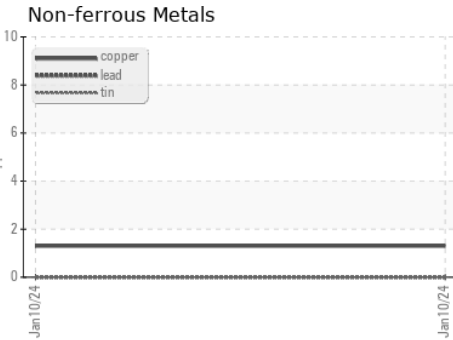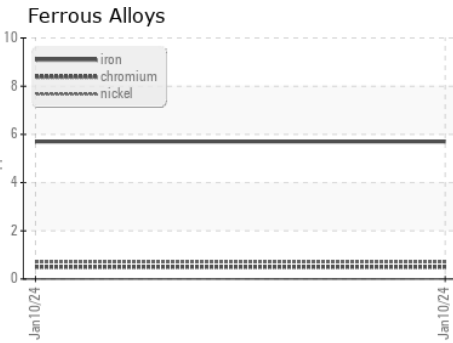

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RLB0000025 **Recieved** : 30 Jan 2024
Lab Number : **06074378** **Diagnosed** : 31 Jan 2024
Unique Number : 10856469 **Diagnostician** : Wes Davis
Test Package : FLEET

CHAMLEY PIPE & SALVAGE
 5228 134TH AVE NW
 WILLISTON, ND
 US 58801
 Contact: CHRIS SCHROEDER
 shop@chamleypipe.com
 T: (701)425-7136
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)