




# OIL ANALYSIS REPORT

Sample Rating Trend

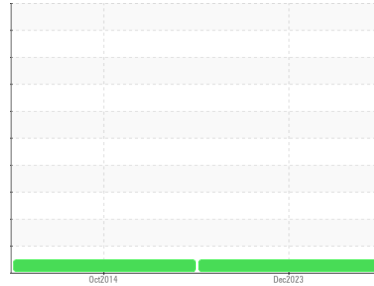

**NORMAL**



Machine Id  
**KENWORTH 07 KENWORTH**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 15W40 (40 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WCM1396340</b>	WCM1311442	---
Sample Date	Client Info		<b>18 Dec 2023</b>	21 Oct 2014	---
Machine Age	mls	Client Info	<b>694680</b>	354576	---
Oil Age	mls	Client Info	<b>10000</b>	12000	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	54	---
Chromium	ppm	ASTM D5185m >6	<b>&lt;1</b>	1	---
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>3</b>	2	---
Lead	ppm	ASTM D5185m >10	<b>1</b>	12	---
Copper	ppm	ASTM D5185m >150	<b>5</b>	6	---
Tin	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	---
Antimony	ppm	ASTM D5185m	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>32</b>	30	---
Barium	ppm	ASTM D5185m 10	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 100	<b>83</b>	83	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m 450	<b>204</b>	46	---
Calcium	ppm	ASTM D5185m 3000	<b>2943</b>	3070	---
Phosphorus	ppm	ASTM D5185m 1150	<b>929</b>	1236	---
Zinc	ppm	ASTM D5185m 1350	<b>1086</b>	1330	---
Sulfur	ppm	ASTM D5185m 4250	<b>6472</b>	9655	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>11</b>	8	---
Sodium	ppm	ASTM D5185m >158	<b>1</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>0</b>	2	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.2</b>	7.	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.2</b>	17.	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.3</b>	11.	---
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>10.0</b>	---	---











# OIL ANALYSIS REPORT

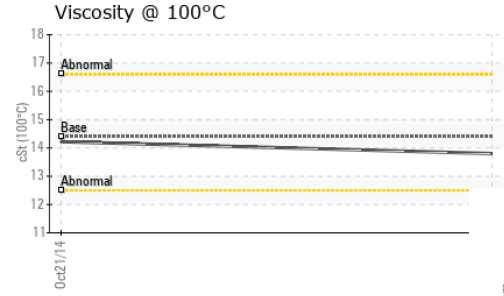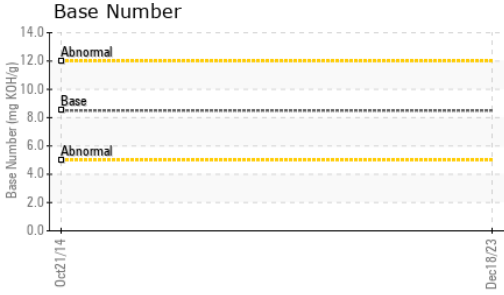

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	14.22

## GRAPHS

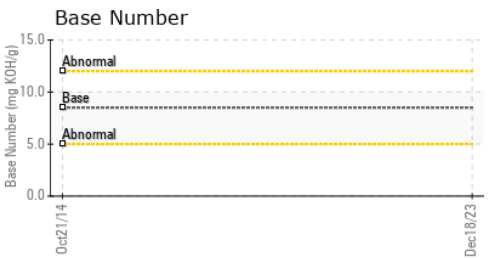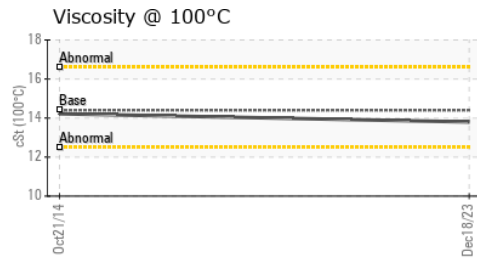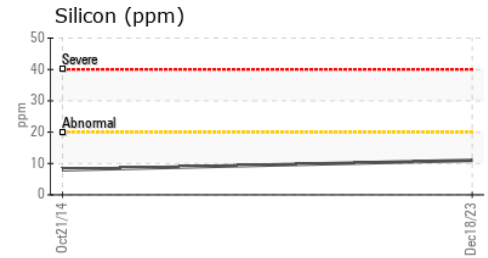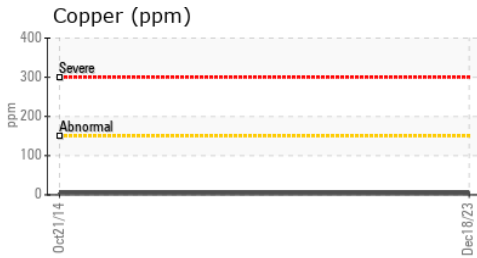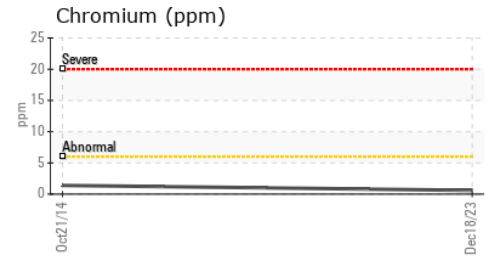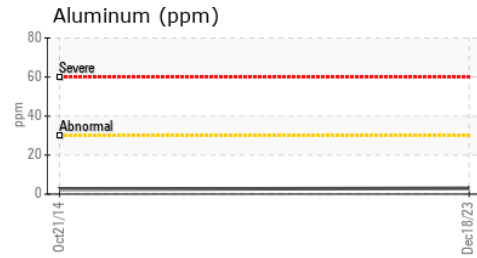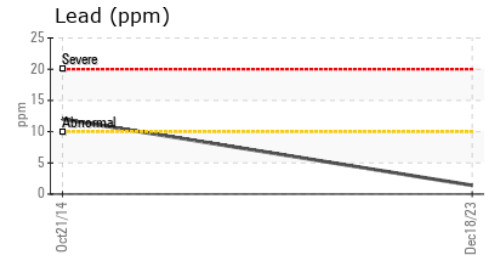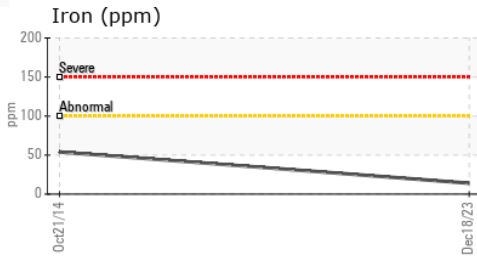

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WCM1396340      Recieved : 30 Jan 2024  
 Lab Number : 06074453      Diagnosed : 31 Jan 2024  
 Unique Number : 10856544      Diagnostician : Wes Davis  
 Test Package : MOB 1 ( Additional Tests: TBN )

**PANTERMEHL LAND CLEARING**  
 1427 BUG HILL RD.  
 ASHFIELD, MA  
 US 01330  
 Contact: RICHARD  
 plc1427@yahoo.com  
 T: (413)628-0058  
 F: (413)628-4660

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)