



Machine Id
SULLAIR 20012 - QUIKERET

Component
Compressor
Fluid
QC ULTRA PLUS (--- GAL)



DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	TO50001864	---	---
Sample Date	Client Info	05 Jan 2024	---	---
Machine Age	hrs	Client Info	38957	---
Oil Age	hrs	Client Info	0	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<1	---
Chromium	ppm	ASTM D5185m >10	<1	---
Nickel	ppm	ASTM D5185m	0	---
Titanium	ppm	ASTM D5185m	<1	---
Silver	ppm	ASTM D5185m	0	---
Aluminum	ppm	ASTM D5185m >25	2	---
Lead	ppm	ASTM D5185m >25	<1	---
Copper	ppm	ASTM D5185m >50	1	---
Tin	ppm	ASTM D5185m >15	<1	---
Vanadium	ppm	ASTM D5185m	0	---
Cadmium	ppm	ASTM D5185m	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	---
Barium	ppm	ASTM D5185m	7	---
Molybdenum	ppm	ASTM D5185m	<1	---
Manganese	ppm	ASTM D5185m	0	---
Magnesium	ppm	ASTM D5185m	3	---
Calcium	ppm	ASTM D5185m	4	---
Phosphorus	ppm	ASTM D5185m	299	---
Zinc	ppm	ASTM D5185m	9	---
Sulfur	ppm	ASTM D5185m	0	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	---
Sodium	ppm	ASTM D5185m	13	---
Potassium	ppm	ASTM D5185m >20	3	---
Water	%	ASTM D6304 >0.1	0.010	---
ppm Water	ppm	ASTM D6304 >1000	100	---






FLUID CLEANLINESS

method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	▲ 34172	---	---
Particles >6µm	ASTM D7647 >2500	▲ 13484	---	---
Particles >14µm	ASTM D7647 >320	▲ 912	---	---
Particles >21µm	ASTM D7647 >80	▲ 123	---	---
Particles >38µm	ASTM D7647 >20	1	---	---
Particles >71µm	ASTM D7647 >4	0	---	---
Oil Cleanliness	ISO 4406 (c) >20/18/15	▲ 22/21/17	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.19	---

OIL ANALYSIS REPORT

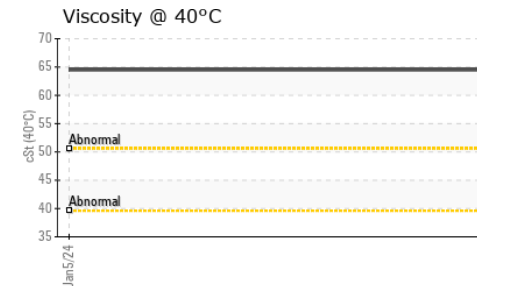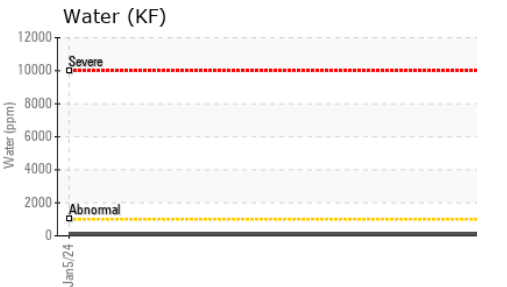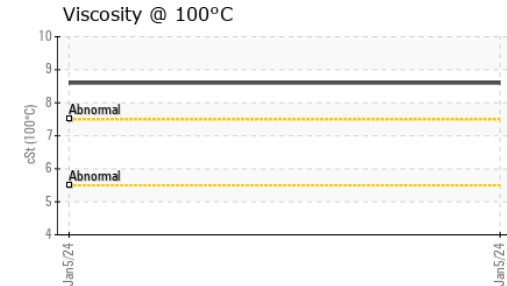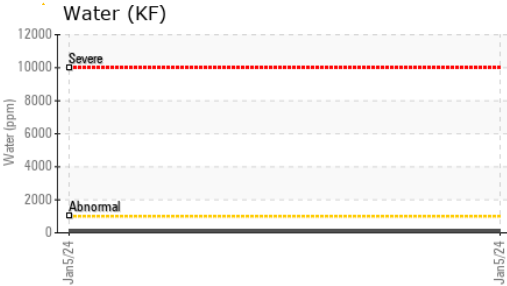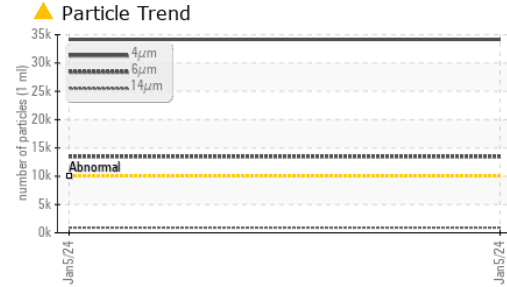





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	64.5	---	---
Visc @ 100°C	cSt	ASTM D445	8.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270	104	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2	
Color					no image	no image
Bottom					no image	no image

GRAPHS

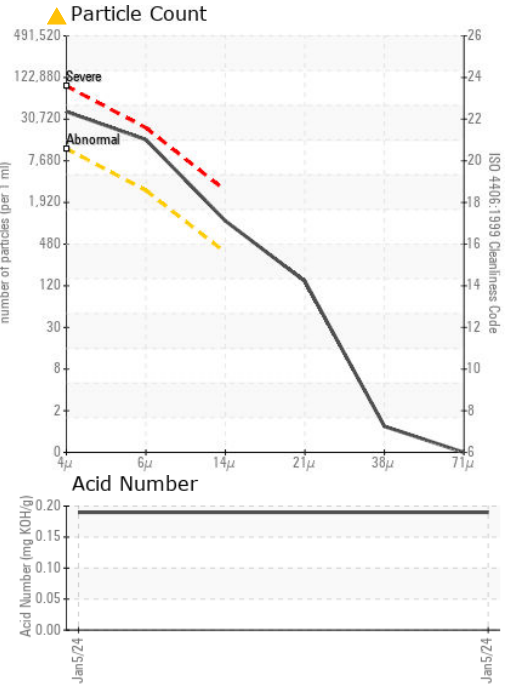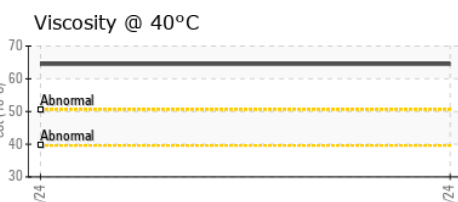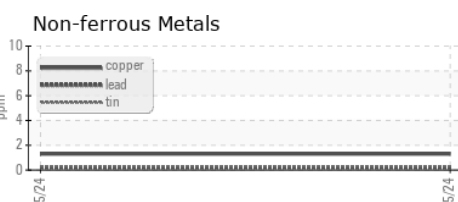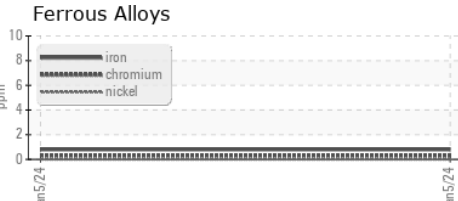

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO50001864 **Recieved** : 30 Jan 2024
Lab Number : 06074688 **Diagnosed** : 01 Feb 2024
Unique Number : 10856779 **Diagnostician** : Jonathan Hester
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)

QUALITY COMPRESSOR
 4428 CR 616
 ALVARADO, TX
 US 76009
 Contact: SEAN
 SEAN@QCOMPRESSOR.COM
 T: (817)822-1333
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)