

### **OIL ANALYSIS REPORT**

# GARDNER DENVER S119872 - JOHNSON CO PIPE

Compressor

QUINCY QUINSYN (--- GAL)

#### DIAGNOSIS

#### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear


All component wear rates are normal.

#### Contamination

There is a high amount of particulates present in the oil.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

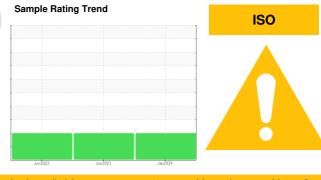


SAMPLE INFORM	<b>MATION</b>	method	limit/base	current	history1	history2
Sample Number		Client Info		TO50001865	QUC0000370	QUC0000909
Sample Date		Client Info		04 Jan 2024	23 Jun 2023	27 Jun 2022
Machine Age	hrs	Client Info		21073	19789	17569
Oil Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	1	0	<1
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	2	<1	<1
Lead	ppm	ASTM D5185m	>25	<1	0	0
Copper	ppm	ASTM D5185m		<1	<1	<1
Tin	ppm		>15	<1	0	0
Vanadium	ppm	ASTM D5185m	-	0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	<1	0
Magnesium	ppm	ASTM D5185m		0	2	0
Calcium	ppm	ASTM D5185m		4	0	2
Phosphorus	ppm	ASTM D5185m		80	99	187
Zinc	ppm	ASTM D5185m		117	127	396
Sulfur	ppm	ASTM D5185m		945	849	830
CONTAMINANTS	6	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	<1
Sodium	ppm	ASTM D5185m		0	<1	1
Potassium	ppm	ASTM D5185m	>20	3	0	0
Water	%	ASTM D6304	>0.1	0.008	0.017	0.005
ppm Water	ppm	ASTM D6304	>1000	90	179.6	59.8
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	<b>A</b> 28678	<b>A</b> 27348	🔺 115835
Particles >6µm		ASTM D7647	>2500	<u> </u>	▲ 10664	<b>A</b> 24135
Particles >14µm		ASTM D7647	>320	<mark>/</mark> 924	<mark>/</mark> 968	<b>1</b> 033
Particles >21µm		ASTM D7647	>80	<u> </u>	<u> </u>	<u> </u>
Particles >38µm		ASTM D7647	>20	1	6	0
Particles >71µm		ASTM D7647	>4	0	0	0
Oil Cleanliness		ISO 4406 (c)	>20/18/15	<b>A</b> 22/21/17	▲ 22/21/17	▲ 24/22/17
FLUID DEGRADA	TION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	.10	0.33	0.33	0.30


Contact/Location: SEAN ? - QUAALV



## **OIL ANALYSIS REPORT**

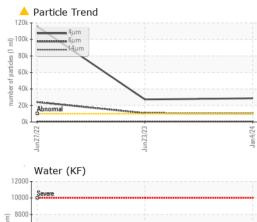




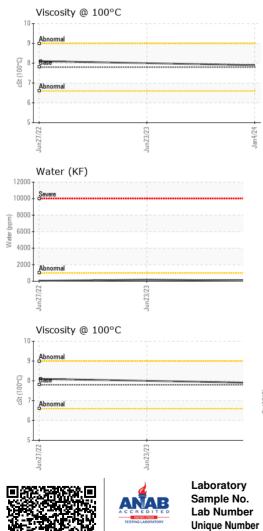

VISUAL		method	limit/base	current	history1	history2
VISUAL		method	IIIIII/Dase	current	TIISLOT Y I	nistory2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	LIGHT	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	44.6	46.4	47.3	47.3
Visc @ 100°C	cSt	ASTM D445	7.8	7.9	8	8.1
Viscosity Index (VI)	Scale	ASTM D2270	132	141	140	144
SAMPLE IMAGES		method	limit/base	current	history1	history2
Color				•		F

Bottom

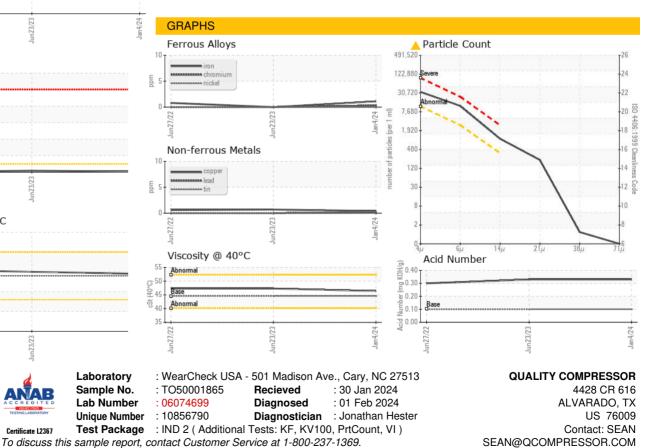

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F:

T: (817)822-1333

Certificate L2367