




# OIL ANALYSIS REPORT

Sample Rating Trend

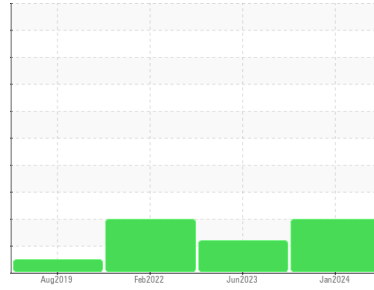

ISO



Machine Id  
**KAESER AIRTOWER 5C 5504842 (S/N 1449)**

Component  
**Compressor**

Fluid  
**KAESER SIGMA (OEM) M-460 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of particulates present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KCPA007005</b>	KCPA005309	KCP38385
Sample Date	Client Info		<b>23 Jan 2024</b>	19 Jun 2023	24 Feb 2022
Machine Age	hrs	Client Info	<b>8858</b>	7651	5056
Oil Age	hrs	Client Info	<b>0</b>	0	3000
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>0</b>	0	<1
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m >3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >10	<b>2</b>	1	<1
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >50	<b>20</b>	19	32
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	2
Antimony	ppm	ASTM D5185m	<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Barium	ppm	ASTM D5185m 90	<b>0</b>	4	10
Molybdenum	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 100	<b>2</b>	<1	22
Calcium	ppm	ASTM D5185m 0	<b>0</b>	0	2
Phosphorus	ppm	ASTM D5185m 0	<b>0</b>	<1	5
Zinc	ppm	ASTM D5185m 0	<b>0</b>	0	11
Sulfur	ppm	ASTM D5185m 23500	<b>21130</b>	18054	15877

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>0</b>	0	3
Sodium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0
Water	%	ASTM D6304 >0.05	<b>0.010</b>	0.005	▲ 0.565
ppm Water	ppm	ASTM D6304 >500	<b>101</b>	53.0	▲ 5650






## FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>50268</b>	16936	---
Particles >6µm	ASTM D7647	>1300	▲ <b>15422</b>	▲ 5049	---
Particles >14µm	ASTM D7647	>80	▲ <b>882</b>	▲ 193	---
Particles >21µm	ASTM D7647	>20	▲ <b>182</b>	13	---
Particles >38µm	ASTM D7647	>4	▲ <b>5</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>--/17/13	▲ <b>23/21/17</b>	▲ 21/20/15	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	<b>0.36</b>	0.43	0.46

# OIL ANALYSIS REPORT

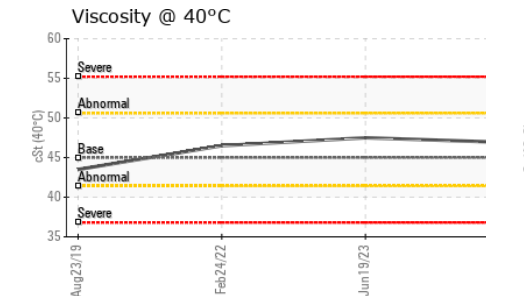
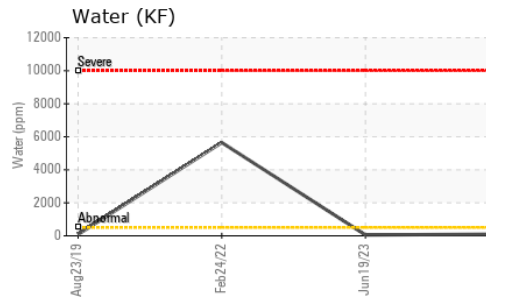
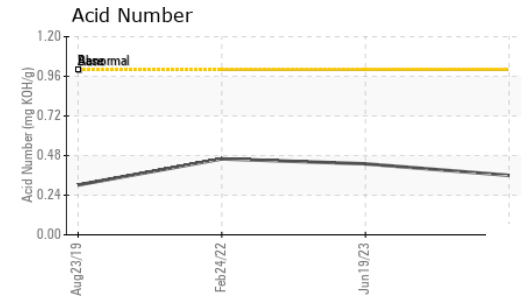
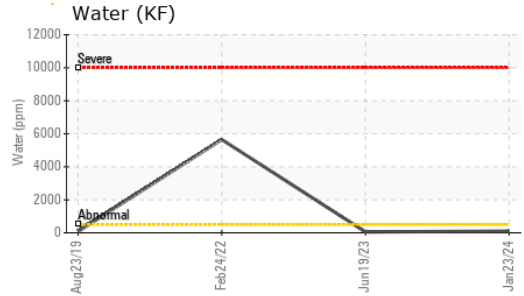
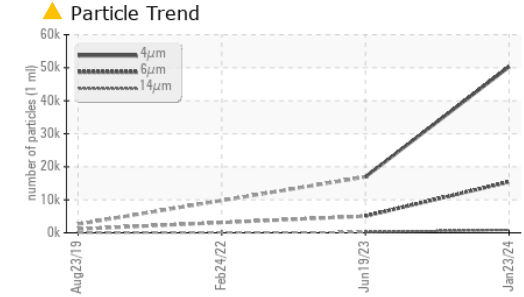


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	▲ 0.2%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	46.9	47.5	46.5

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

## GRAPHS

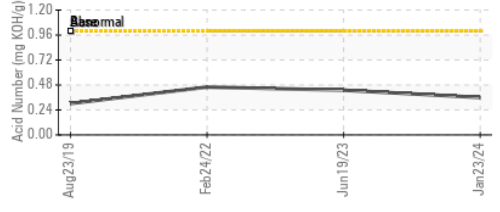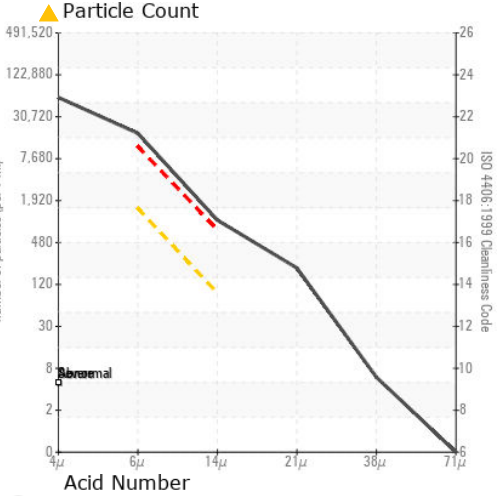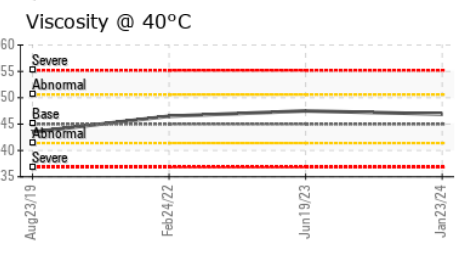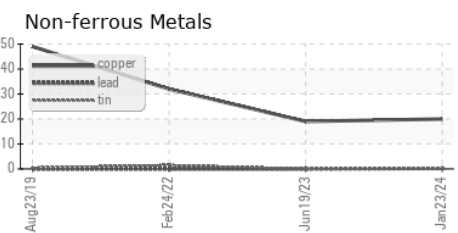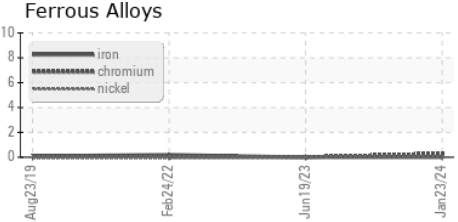

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KCPA007005 **Recieved** : 30 Jan 2024  
**Lab Number** : 06074758 **Diagnosed** : 31 Jan 2024  
**Unique Number** : 10856849 **Diagnostician** : Doug Bogart  
**Test Package** : IND 2 ( Additional Tests: KF, PrtCount )

**ARAMARK CLEANROOM SERVICES**  
 3 YADKIN ST  
 DURHAM, NC  
 US 27703  
 Contact: NEIL BROGDEN  
 brogden-neil@aramark.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)