


OIL ANALYSIS REPORT

Sample Rating Trend



VIS DEBRIS



KAESER 6740822

Component

Compressor

KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

			Feb 2023	Jan 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA007331	KC94550	
Sample Date		Client Info		19 Jan 2024	15 Feb 2023	
Machine Age	hrs	Client Info		16534	13935	
Oil Age	hrs	Client Info		0	5864	
Oil Changed		Client Info		N/A	Changed	
Sample Status				ABNORMAL	NORMAL	
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	0	0	
Chromium	ppm	ASTM D5185m	>10	<1	0	
Nickel	ppm	ASTM D5185m	>3	0	0	
Titanium	ppm	ASTM D5185m	>3	<1	0	
Silver	ppm	ASTM D5185m	>2	0	0	
Aluminum	ppm	ASTM D5185m	>10	2	1	
Lead	ppm	ASTM D5185m	>10	<1	0	
Copper	ppm	ASTM D5185m	>50	1	2	
Tin	ppm	ASTM D5185m	>10	<1	0	
Vanadium	ppm	ASTM D5185m		0	0	
Cadmium	ppm	ASTM D5185m		0	0	
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	
Barium	ppm	ASTM D5185m	90	<1	13	
Molybdenum	ppm	ASTM D5185m		<1	0	
Manganese	ppm	ASTM D5185m		0	1	
Magnesium	ppm	ASTM D5185m	90	79	88	
Calcium	ppm	ASTM D5185m	2	2	2	
Phosphorus	ppm	ASTM D5185m		0	<1	
Zinc	ppm	ASTM D5185m		0	25	
Sulfur	ppm	ASTM D5185m		20679	20669	
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	1	
Sodium	ppm	ASTM D5185m		14	19	
Potassium	ppm	ASTM D5185m	>20	5	3	
Water	%	ASTM D6304	>0.05	0.013	0.023	
ppm Water	ppm	ASTM D6304	>500	140	236.1	
FLUID CLEANLIN	NESS	method	limit/base	current	history1	history2
Particles >4μm		ASTM D7647			1961	
Particles >6µm		ASTM D7647	>1300		556	
Particles >14μm		ASTM D7647	>80		36	
Particles >21µm		ASTM D7647	>20		9	
Particles >38µm		ASTM D7647	>4		0	
Particles >71µm		ASTM D7647	>3		0	
Oil Cleanliness		ISO 4406 (c)	>/17/13		18/16/12	
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	0.32	0.38	



OIL ANALYSIS REPORT

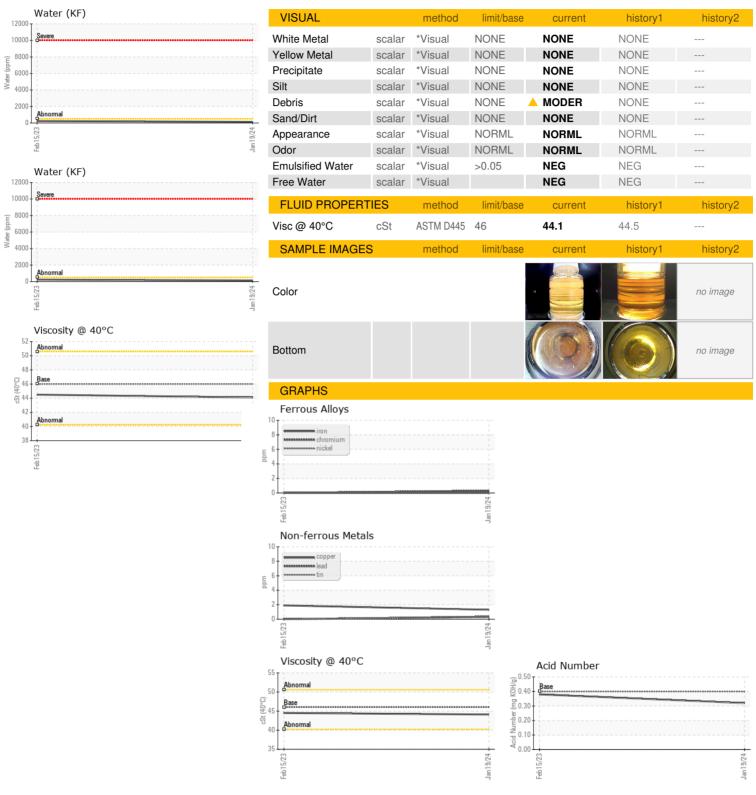





Laboratory Sample No. Lab Number **Unique Number**

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : KCPA007331 : 06074764

: 10856855

Recieved : 30 Jan 2024 Diagnosed : 31 Jan 2024 Diagnostician : Doug Bogart

Test Package : IND 2 (Additional Tests: KF, PrtCount) To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

TIMBERLAND DISTRIBUTION

50 N SERVICE RD DANVILLE, KY US 40422

Contact: Service Manager

T: F: