


OIL ANALYSIS REPORT

Sample Rating Trend



ISO

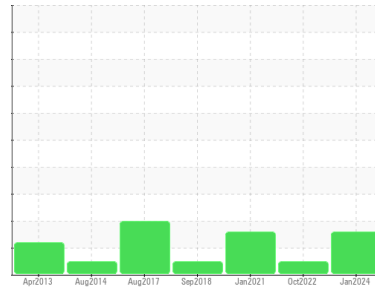

Machine Id
KAESER ASD30T 2538562 (S/N 1034)

Component
Compressor

Fluid
KAESER SIGMA (OEM) M-460 (--- LTR)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KCPA008594	KCP46633	KCP27832
Sample Date	Client Info		12 Jan 2024	06 Oct 2022	15 Jan 2021
Machine Age	hrs	Client Info	16950	16727	14499
Oil Age	hrs	Client Info	0	2228	600
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			ABNORMAL	NORMAL	ABNORMAL

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	0	0
Chromium	ppm	ASTM D5185m >10	<1	0	0
Nickel	ppm	ASTM D5185m >3	0	0	0
Titanium	ppm	ASTM D5185m >3	<1	0	0
Silver	ppm	ASTM D5185m >2	0	0	0
Aluminum	ppm	ASTM D5185m >10	2	<1	0
Lead	ppm	ASTM D5185m >10	<1	0	0
Copper	ppm	ASTM D5185m >50	<1	2	<1
Tin	ppm	ASTM D5185m >10	<1	<1	0
Antimony	ppm	ASTM D5185m	---	---	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	0
Barium	ppm	ASTM D5185m 90	31	0	5
Molybdenum	ppm	ASTM D5185m 0	<1	0	0
Manganese	ppm	ASTM D5185m	0	0	0
Magnesium	ppm	ASTM D5185m 100	85	57	78
Calcium	ppm	ASTM D5185m 0	2	0	0
Phosphorus	ppm	ASTM D5185m 0	0	2	11
Zinc	ppm	ASTM D5185m 0	0	6	0
Sulfur	ppm	ASTM D5185m 23500	20975	21339	17595

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	0	0	0
Sodium	ppm	ASTM D5185m	9	19	20
Potassium	ppm	ASTM D5185m >20	4	0	2
Water	%	ASTM D6304 >0.05	0.015	0.018	0.015
ppm Water	ppm	ASTM D6304 >500	159	188.8	156.9






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		13539	2107	7285
Particles >6µm	ASTM D7647	>1300	▲ 6459	852	▲ 3790
Particles >14µm	ASTM D7647	>160	▲ 1212	123	▲ 1039
Particles >21µm	ASTM D7647	>40	▲ 348	31	▲ 400
Particles >38µm	ASTM D7647	>10	7	3	▲ 23
Particles >71µm	ASTM D7647	>3	1	0	1
Oil Cleanliness	ISO 4406 (c)	>--/17/14	▲ 21/20/17	18/17/14	▲ 19/17

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	0.34	0.34	0.326

OIL ANALYSIS REPORT

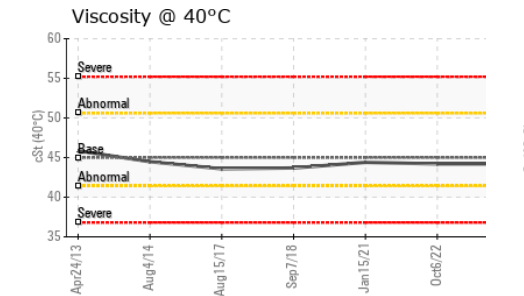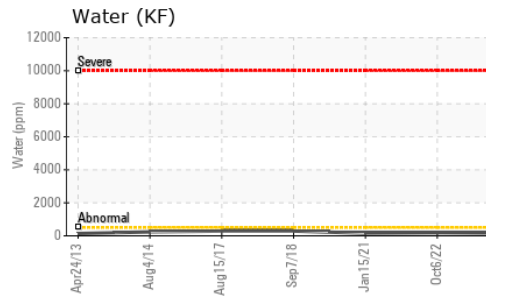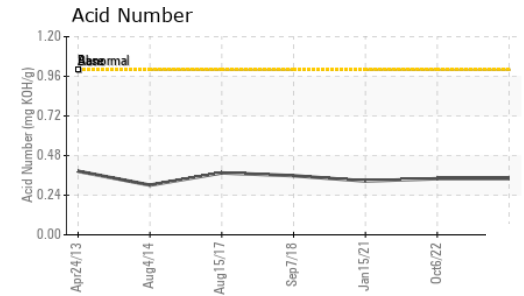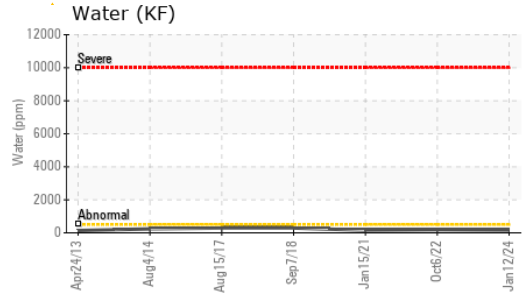
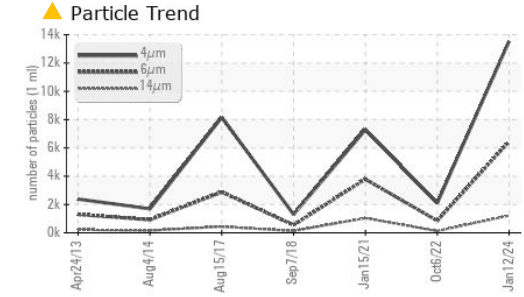


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 45	44.2	44.2	44.4

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color					
Bottom					

GRAPHS

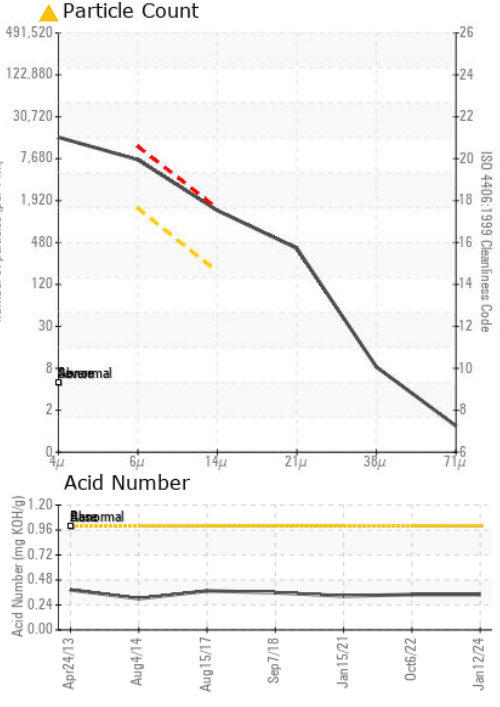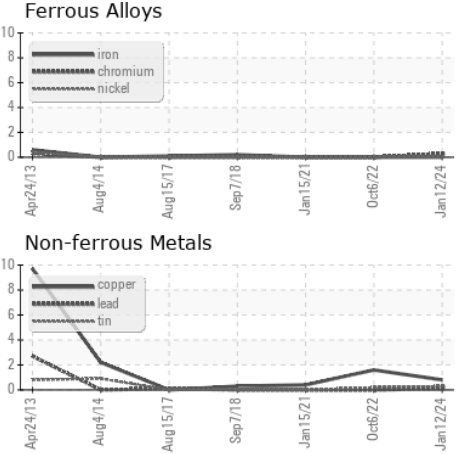

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KCPA008594 **Received** : 30 Jan 2024
Lab Number : 06074765 **Diagnosed** : 31 Jan 2024
Unique Number : 10856856 **Diagnostician** : Doug Bogart
Test Package : IND 2 (Additional Tests: KF, PrtCount)

ACT - AUTOMATED CUTTING TECH
 1300 JOHN C WATTS DR
 NICHOLASVILLE, KY
 US 40356
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)