

OIL ANALYSIS REPORT

SAMPLE INFO

Sample Rating Trend



history2

Machine Id **6919678 (S/N 1541)**

Component

Compressor

KAESER SIGMA (OEM) FG-460 (--- GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition


The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

	Dec2020	Dec2021 Aug	2022 Feb2023	Jan 2024
RMATION	method	limit/base	current	hist
	Client Info		KC120917	KC9/157

Cample Number		Client Info		KC120917	KC94577	KC97125
Sample Number Sample Date		Client Info		22 Jan 2024	13 Feb 2023	31 Aug 2022
Machine Age	hrs	Client Info		18054	13560	10764
Oil Age	hrs	Client Info		0	2796	3000
Oil Changed	1113	Client Info		N/A	Changed	Changed
Sample Status		Oliciti IIIIo		ABNORMAL	ABNORMAL	ABNORMAL
·						
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	0
Chromium	ppm	ASTM D5185m	>10	<1	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>10	4	3	4
Lead	ppm	ASTM D5185m	>10	<1	0	0
Copper	ppm	ASTM D5185m	>50	6	8	6
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	0	0
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		<1	0	0
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		2	<1	<1
Calcium	ppm	ASTM D5185m		<1	0	<1
Phosphorus	ppm	ASTM D5185m	500	77	163	69
Zinc	ppm	ASTM D5185m		61	140	71
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	0	<1	0
Sodium	ppm	ASTM D5185m		0	0	0
Potassium	ppm	ASTM D5185m	>20	2	<1	<1
Water	%	ASTM D6304	>0.05	0.004	0.004	△ 0.209
ppm Water	ppm	ASTM D6304	>500	47	46.4	2 090
FLUID CLEANLIN	ESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		101441	28053	
Particles >6µm		ASTM D7647	>1300	43639	△ 9838	
·		A311VI D7047				
Particles >14µm		ASTM D7647	>80	3227	▲ 753	
Particles >14µm Particles >21µm					▲ 753 ▲ 129	
•		ASTM D7647	>80	<u> </u>		
Particles >21μm		ASTM D7647 ASTM D7647	>80 >20 >4	▲ 3227 ▲ 492	<u>129</u>	
Particles >21μm Particles >38μm		ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4	▲ 3227 ▲ 492 3	▲ 129 ▲ 8	
Particles >21μm Particles >38μm Particles >71μm	TION	ASTM D7647 ASTM D7647 ASTM D7647 ASTM D7647	>80 >20 >4 >3	▲ 3227 ▲ 492 3 0	▲ 129 ▲ 8 0	



OIL ANALYSIS REPORT

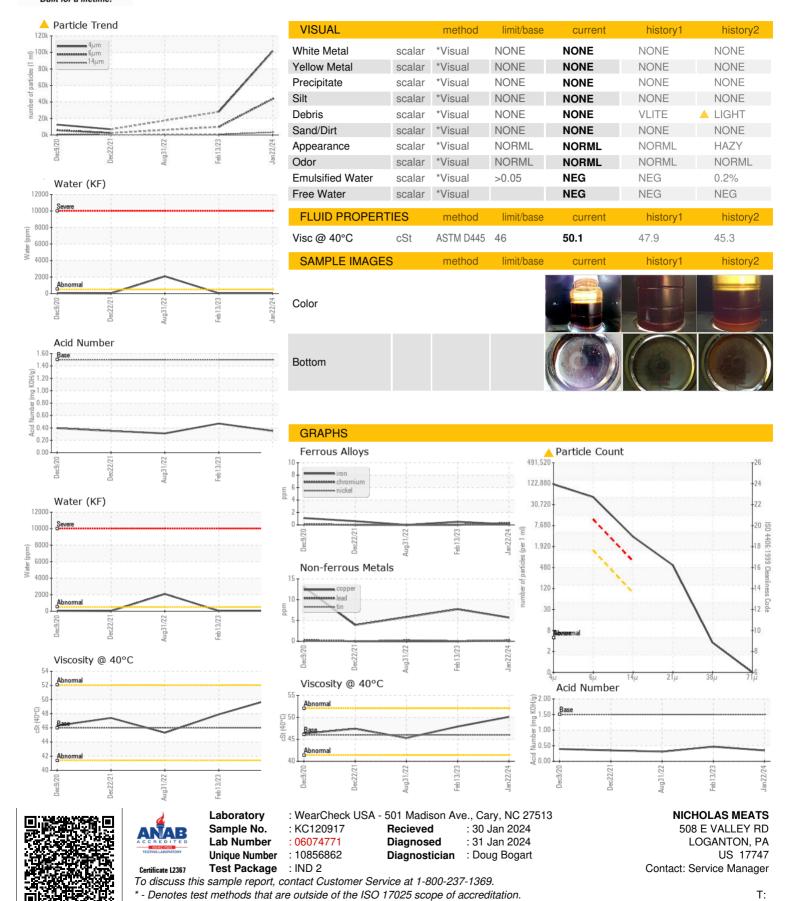

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: