

Machine Id  
**V28 - NO OTHER INFO PROVIDED**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 46 (--- LTR)**

**DIAGNOSIS**

**Recommendation**

Little or no information is provided as to the component and lubricant being tested. Recommendations are therefore generic in nature and may not apply to the current application. Please forward information as to equipment type, reservoir capacity, lubricant type and any pertinent information to allow for a more accurate assessment. Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

**Wear**

All component wear rates are normal.

**Contamination**

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION**

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>ST42656</b>	ST42658	---
Sample Date	Client Info		<b>29 Jan 2024</b>	31 Jul 2023	---
Machine Age	hrs	Client Info	<b>0</b>	0	---
Oil Age	hrs	Client Info	<b>0</b>	0	---
Oil Changed	Client Info		<b>N/A</b>	N/A	---
Sample Status			<b>NORMAL</b>	NORMAL	---

**WEAR METALS**

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	---
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >20	<b>0</b>	<1	---
Lead	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	---
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

**ADDITIVES**

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 5	<b>0</b>	0	---
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 5	<b>0</b>	0	---
Manganese	ppm	ASTM D5185m	<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m 25	<b>7</b>	6	---
Calcium	ppm	ASTM D5185m 200	<b>12</b>	13	---
Phosphorus	ppm	ASTM D5185m 300	<b>237</b>	225	---
Zinc	ppm	ASTM D5185m 370	<b>164</b>	150	---
Sulfur	ppm	ASTM D5185m 2500	<b>1962</b>	2164	---

**CONTAMINANTS**

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Water	%	ASTM D6304 >0.05	<b>0.006</b>	0.005	---
ppm Water	ppm	ASTM D6304 >500	<b>64</b>	55.2	---






**FLUID CLEANLINESS**

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	<b>271</b>	1550	---
Particles >6µm	ASTM D7647	>1300	<b>83</b>	366	---
Particles >14µm	ASTM D7647	>160	<b>8</b>	25	---
Particles >21µm	ASTM D7647	>40	<b>2</b>	7	---
Particles >38µm	ASTM D7647	>10	<b>0</b>	1	---
Particles >71µm	ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	<b>15/14/10</b>	18/16/12	---

**FLUID DEGRADATION**

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.57	<b>0.21</b>	0.20	---


# OIL ANALYSIS REPORT

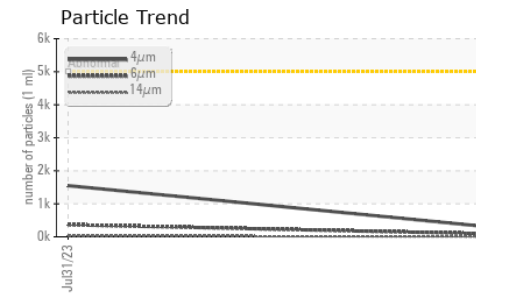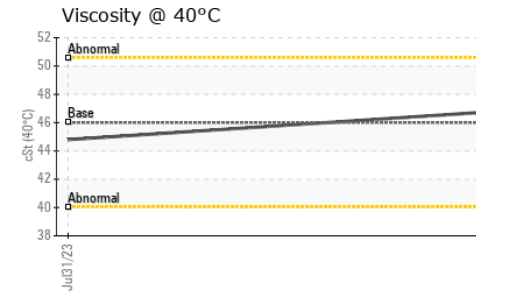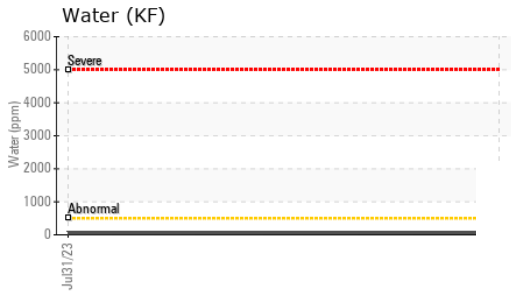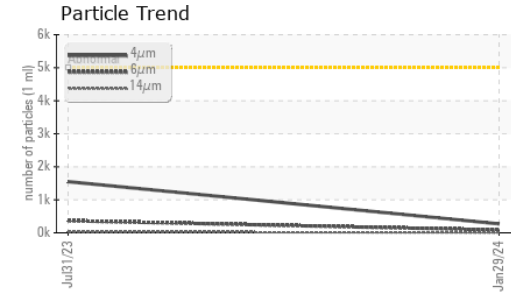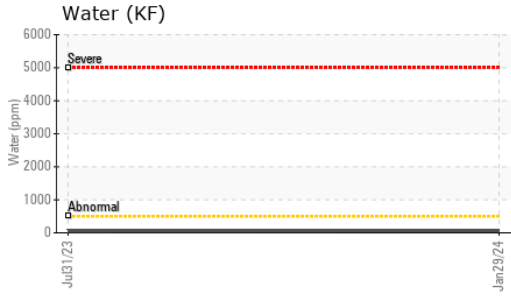






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	46.8	44.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

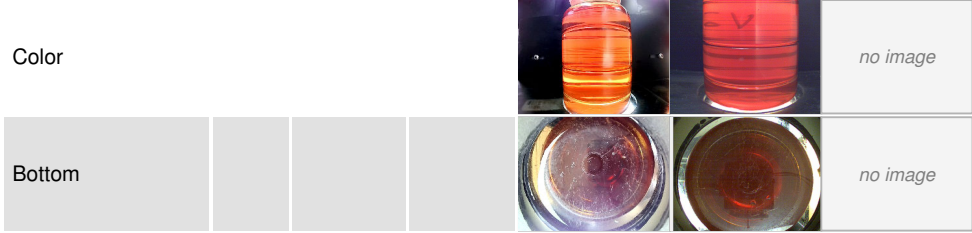

## GRAPHS

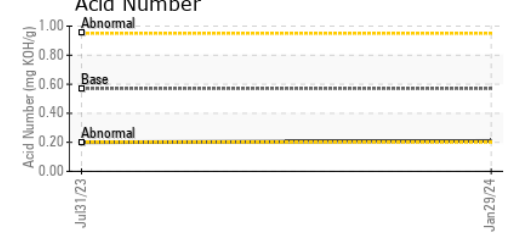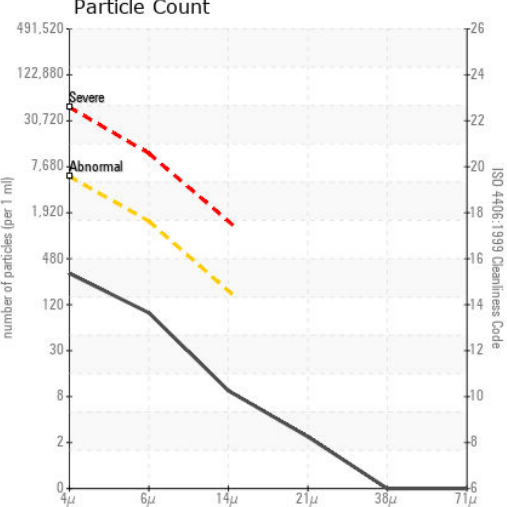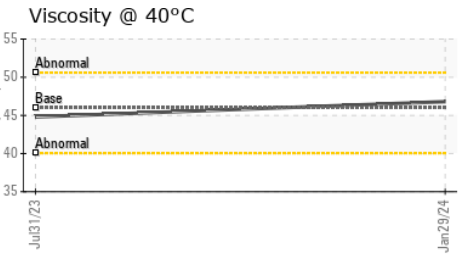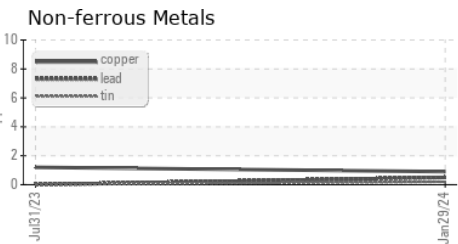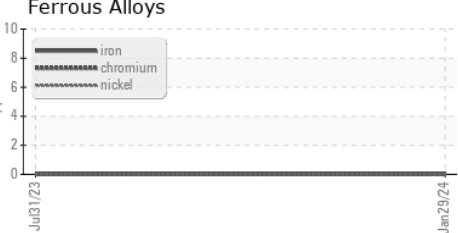

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ST42656 **Received** : 30 Jan 2024  
**Lab Number** : 06074786 **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10856877 **Diagnostician** : Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KF )

**STAUFF FILTRATION TECHNOLOGY**  
 42650 EXECUTIVE DR  
 CANTON, MI  
 US 48188  
 Contact: CAMERON MACNEIL  
 cmacneil@stauffusa.com  
 T: (734)747-7300  
 F: (734)747-7342

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)