




# OIL ANALYSIS REPORT

Sample Rating Trend

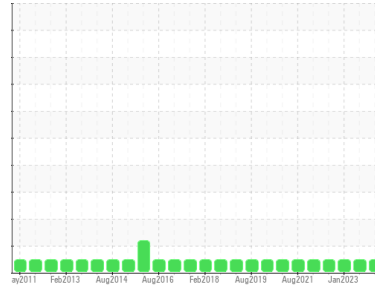

**NORMAL**



Machine Id  
**ALSTOM R057**

Component  
**Gearbox**

Fluid  
**TOTAL CARTER SH 220 (3 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>WC0649692</b>	WC0643828	WC0673283
Sample Date	Client Info		<b>28 Jan 2024</b>	30 Jul 2023	27 Jan 2023
Machine Age	hrs	Client Info	<b>0</b>	0	0
Oil Age	hrs	Client Info	<b>0</b>	0	0
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>123</b>	142	129
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >10	<b>1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	4	3
Lead	ppm	ASTM D5185m >50	<b>4</b>	1	3
Copper	ppm	ASTM D5185m >200	<b>43</b>	51	52
Tin	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Barium	ppm	ASTM D5185m	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m	<b>2</b>	2	1
Magnesium	ppm	ASTM D5185m	<b>3</b>	1	1
Calcium	ppm	ASTM D5185m	<b>6</b>	4	5
Phosphorus	ppm	ASTM D5185m	<b>336</b>	341	326
Zinc	ppm	ASTM D5185m	<b>112</b>	116	117
Sulfur	ppm	ASTM D5185m	<b>3284</b>	4033	3249

## CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>15</b>	17	17
Sodium	ppm	ASTM D5185m	<b>19</b>	25	25
Potassium	ppm	ASTM D5185m >20	<b>3</b>	1	<1

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	<b>0.35</b>	0.41	0.42



# OIL ANALYSIS REPORT

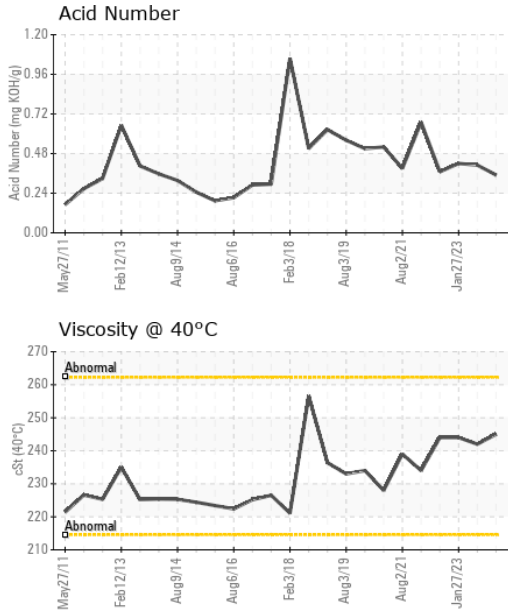


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	<b>245</b>	242	244

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

## GRAPHS

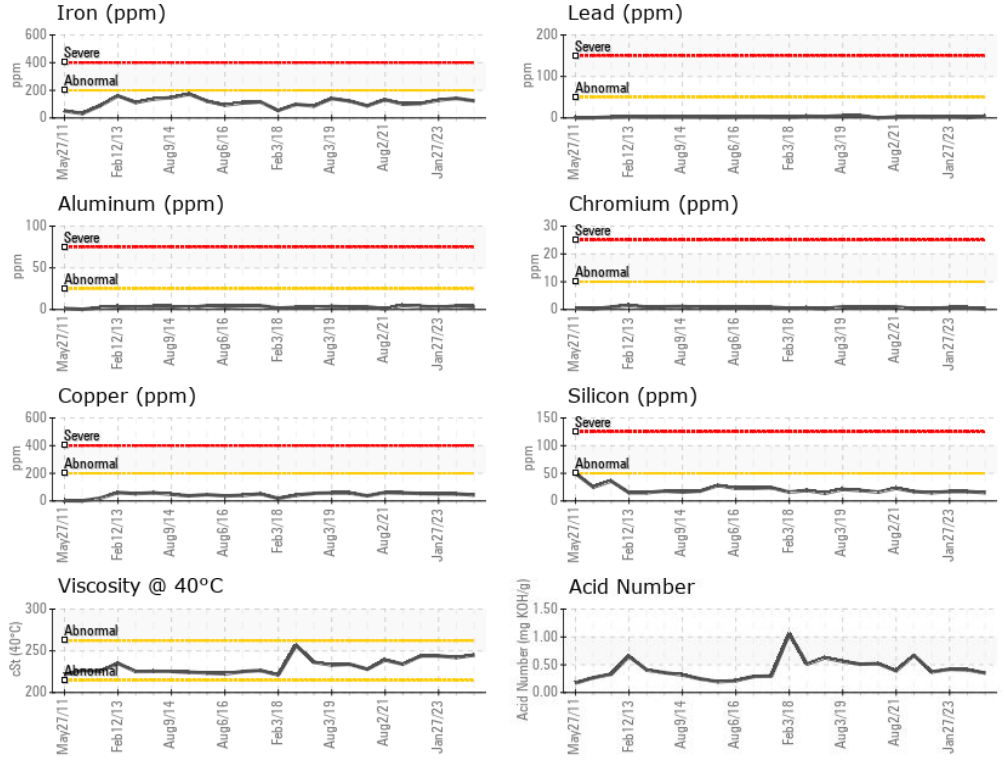

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0649692 **Recieved** : 30 Jan 2024  
**Lab Number** : **06074953** **Diagnosed** : 31 Jan 2024  
**Unique Number** : 10857044 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**AMTRAK**  
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR  
 WASHINGTON, DC  
 US 20018  
 Contact: MICHAEL PORTER  
 michael.porter@amtrak.com  
 T: (202)870-1399  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)