




# OIL ANALYSIS REPORT

Sample Rating Trend

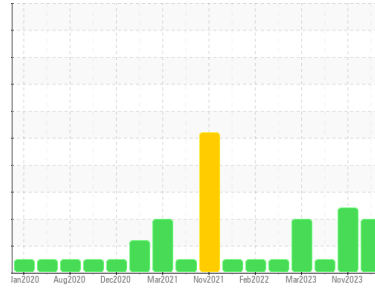

## VISCOSITY



Area  
**GUAY SON [CONHER]**  
 Machine Id  
**IBACO BM DAGIO I**  
 Component  
**Bottom Main Engine**  
 Fluid  
**XTRA REV 15W40 (--- LTR)**

### DIAGNOSIS

#### Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is a moderate amount of particulates present in the oil. Fuel content negligible.

#### Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>KL0013478</b>	KL0013348	KL0012862
Sample Date	Client Info		<b>18 Jan 2024</b>	01 Nov 2023	21 Sep 2023
Machine Age	hrs	Client Info	<b>14497</b>	13942	13298
Oil Age	hrs	Client Info	<b>700</b>	645	1
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>ATTENTION</b>	ATTENTION	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	<b>1</b>	13	3
Chromium	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >15	<b>9</b>	2	3
Lead	ppm	ASTM D5185m >18	<b>0</b>	2	0
Copper	ppm	ASTM D5185m >80	<b>2</b>	2	<1
Tin	ppm	ASTM D5185m >14	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>6</b>	<1	22
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>4</b>	6	8
Manganese	ppm	ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>28</b>	22	43
Calcium	ppm	ASTM D5185m	<b>89</b>	2711	2428
Phosphorus	ppm	ASTM D5185m	<b>19</b>	1131	1068
Zinc	ppm	ASTM D5185m	<b>31</b>	1415	1306
Sulfur	ppm	ASTM D5185m	<b>16</b>	3834	3739

### CONTAMINANTS






	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>1</b>	8	7
Sodium	ppm	ASTM D5185m >75	<b>37</b>	2	<1
Potassium	ppm	ASTM D5185m >20	<b>8</b>	3	2
Fuel	%	ASTM D3524 >4.0	<b>1.7</b>	1.2	<1.0

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>1.4</b>	0.8	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.8</b>	7.4	4.3
Sulfation	Abs/1mm	*ASTM D7415 >30	<b>18.2</b>	16.8	12.7



# OIL ANALYSIS REPORT

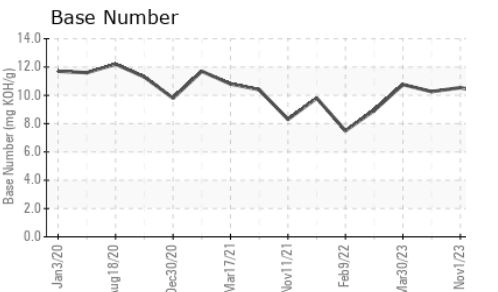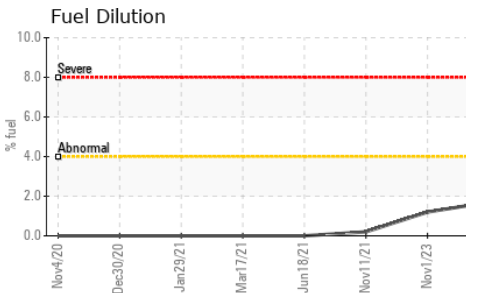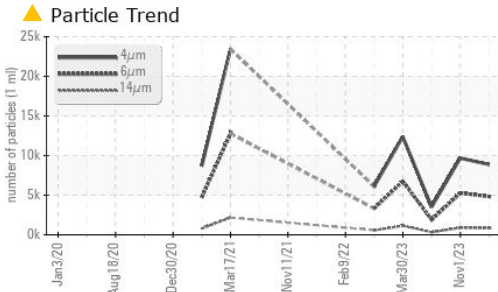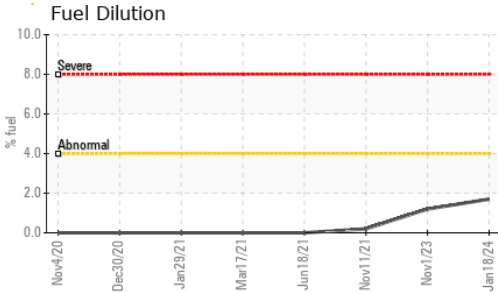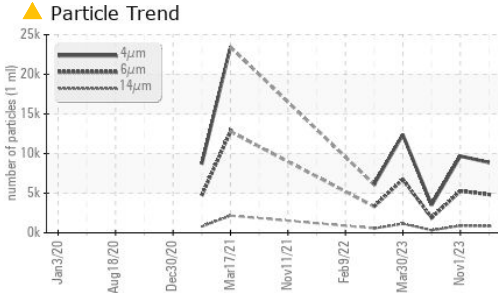






FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		<b>8865</b>	9683	3506
Particles >6µm	ASTM D7647	>5000	<b>4829</b>	▲ 5275	1910
Particles >14µm	ASTM D7647	>640	▲ <b>822</b>	▲ 898	325
Particles >21µm	ASTM D7647	>160	▲ <b>277</b>	▲ 302	109
Particles >38µm	ASTM D7647	>40	▲ <b>43</b>	▲ 47	17
Particles >71µm	ASTM D7647	>10	<b>4</b>	5	2
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ <b>19/17</b>	▲ 20/17	18/16

FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414	>25	<b>10.1</b>	8.7	6.5
Base Number (BN)	mg KOH/g ASTM D2896		<b>10.15</b>	10.54	10.26

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual	>0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual		<b>NEG</b>	NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		▲ <b>11.2</b>	▲ 11.5	13.0

## GRAPHS

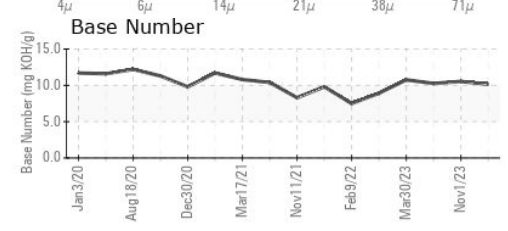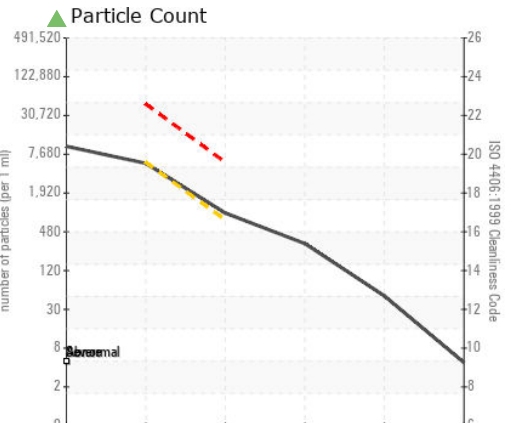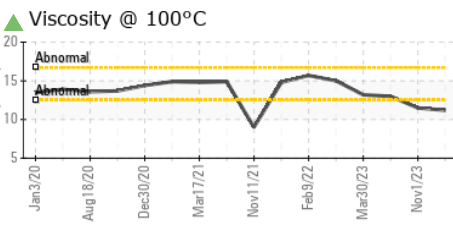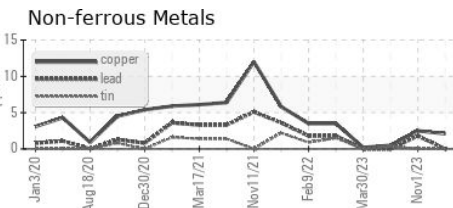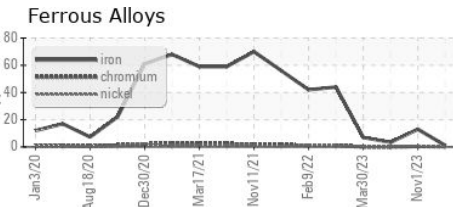

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0013478 **Received** : 30 Jan 2024  
**Lab Number** : 06074992 **Diagnosed** : 02 Feb 2024  
**Unique Number** : 10857083 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: FuelDilution, PercentFuel, PrtCount )

**CONOR**  
 JUAREZ 348  
 HERMOSILLO,  
 MX 83140  
 Contact: EDUARDO GARCIA  
 egarcia.comsa@gmail.com  
 T: (526)622-1581 x:81  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)