




OIL ANALYSIS REPORT

Sample Rating Trend

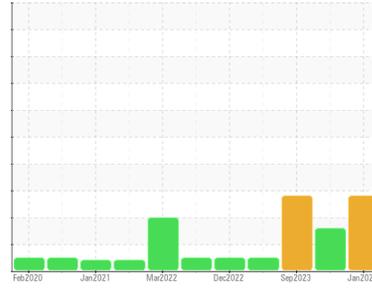

VISCOSITY



Area
GUAY SON [CONHER]
Machine Id
IBACO BM COZAR VI AUX-1
Component
Bottom Diesel Engine
Fluid
XTRA REV 15W40 (--- LTR)

DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The oil viscosity is higher than normal. The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		KL0013492	KL0013331	KL0012821
Sample Date	Client Info		24 Jan 2024	25 Oct 2023	16 Sep 2023
Machine Age	hrs	Client Info	0	13267	12447
Oil Age	hrs	Client Info	100	96	50
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			ABNORMAL	ATTENTION	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	35	7	35
Chromium	ppm	ASTM D5185m >20	<1	<1	8
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	4	<1	5
Lead	ppm	ASTM D5185m >40	0	<1	5
Copper	ppm	ASTM D5185m >330	2	1	13
Tin	ppm	ASTM D5185m >15	<1	0	4
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	15	12	0
Barium	ppm	ASTM D5185m	<1	0	0
Molybdenum	ppm	ASTM D5185m	13	19	0
Manganese	ppm	ASTM D5185m	0	0	1
Magnesium	ppm	ASTM D5185m	71	114	11
Calcium	ppm	ASTM D5185m	2174	1586	3363
Phosphorus	ppm	ASTM D5185m	739	574	853
Zinc	ppm	ASTM D5185m	854	688	945
Sulfur	ppm	ASTM D5185m	4023	3847	6813

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	8	5	▲ 30
Sodium	ppm	ASTM D5185m	0	<1	7
Potassium	ppm	ASTM D5185m >20	3	<1	2


INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.4	0
Nitration	Abs/cm	*ASTM D7624 >20	10.7	8.4	6.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	19.0	19.3	18.7




OIL ANALYSIS REPORT


▲ Particle Trend

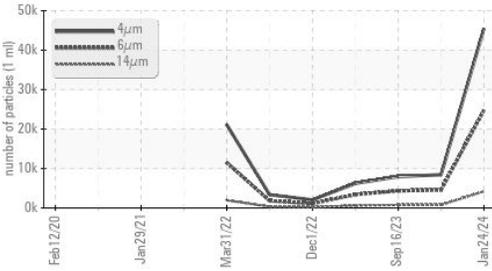


▲ Viscosity @ 100°C

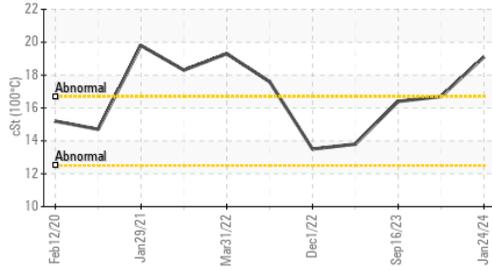

▲ Particle Trend

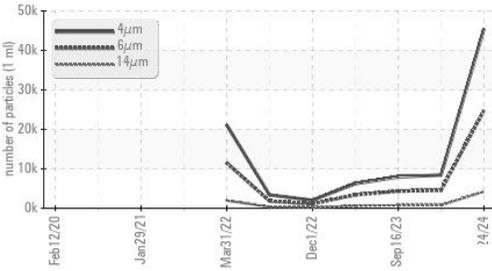

Base Number

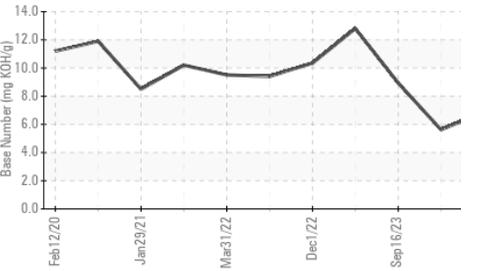

FLUID CLEANLINESS	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647		45491	8421	7952
Particles >6µm	ASTM D7647	>5000	▲ 24781	4588	4332
Particles >14µm	ASTM D7647	>640	▲ 4217	▲ 781	▲ 737
Particles >21µm	ASTM D7647	>160	▲ 1421	▲ 263	▲ 248
Particles >38µm	ASTM D7647	>40	▲ 219	▲ 41	38
Particles >71µm	ASTM D7647	>10	▲ 22	4	4
Oil Cleanliness	ISO 4406 (c)	>19/16	▲ 22/19	▲ 19/17	▲ 19/17


FLUID DEGRADATION	method	limit/base	current	history1	history2
Oxidation	Abs./1mm *ASTM D7414	>25	18.2	16.0	9.0
Base Number (BN)	mg KOH/g ASTM D2896		6.87	5.62	8.94

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar *Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual	NONE	NONE	NONE	NONE
Precipitate	scalar *Visual	NONE	NONE	NONE	NONE
Silt	scalar *Visual	NONE	NONE	NONE	NONE
Debris	scalar *Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual	NONE	NONE	NONE	NONE
Appearance	scalar *Visual	NORML	NORML	NORML	NORML
Odor	scalar *Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual	>0.2	NEG	NEG	NEG
Free Water	scalar *Visual		NEG	NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt ASTM D445		▲ 19.1	16.7	16.4

GRAPHS


Ferrous Alloys

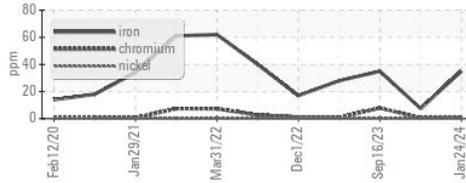


Non-ferrous Metals

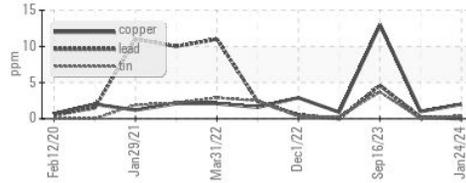


▲ Viscosity @ 100°C

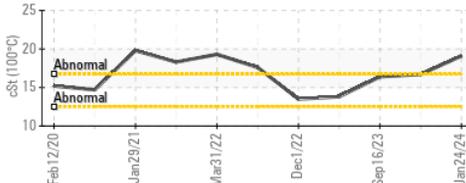

▲ Particle Count

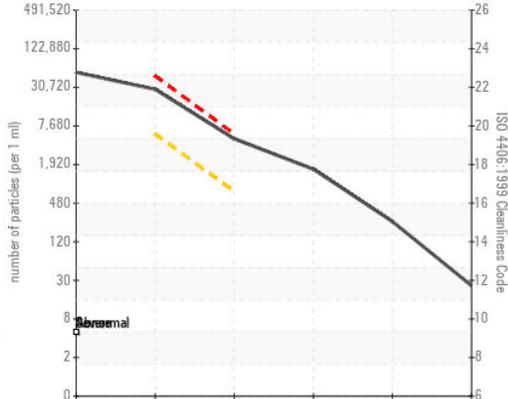

Base Number

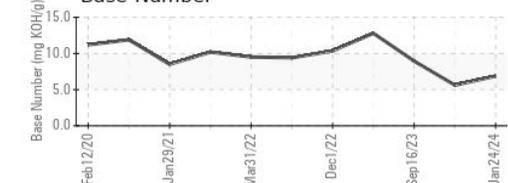

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KL0013492 **Received** : 30 Jan 2024
Lab Number : 06075000 **Diagnosed** : 02 Feb 2024
Unique Number : 10857091 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

CONOR
 JUAREZ 348
 HERMOSILLO,
 MX 83140

Contact: EDUARDO GARCIA
 egarcia.comsa@gmail.com

T: (526)622-1581 x:81

F: x: