




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

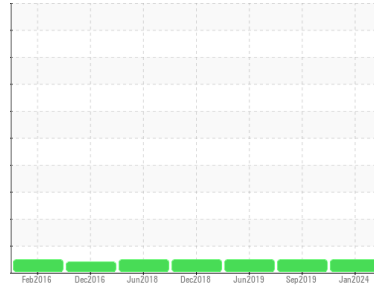

Machine Id
INTERNATIONAL I6242

Component
Front Diesel Engine

Fluid
MOBIL DELVAC 1300 SUPER15W40 (45 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			IL0012703	IL04800183	ILMFC27630
Sample Date	Client Info			09 Jan 2024	15 Sep 2019	04 Jun 2019
Machine Age	mls	Client Info		0	195000	5563
Oil Age	mls	Client Info		0	0	5563
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>165	10	4	5
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	1	1
Lead	ppm	ASTM D5185m	>150	4	0	1
Copper	ppm	ASTM D5185m	>90	2	<1	<1
Tin	ppm	ASTM D5185m	>5	<1	0	0
Antimony	ppm	ASTM D5185m		---	0	0
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	68	50	44
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	102	38	38
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	0	708	541	475
Calcium	ppm	ASTM D5185m		1341	1740	1663
Phosphorus	ppm	ASTM D5185m		841	705	700
Zinc	ppm	ASTM D5185m		946	831	801
Sulfur	ppm	ASTM D5185m		3143	2041	1833



CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>35	6	6	6
Sodium	ppm	ASTM D5185m		3	4	4
Potassium	ppm	ASTM D5185m	>20	3	0	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>7.5	0.4	0.1	0.2
Nitration	Abs/cm	*ASTM D7624	>20	12.7	7.5	9.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.9	22.9	24

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.9	21.6	23.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.4	6	10	9.1











OIL ANALYSIS REPORT

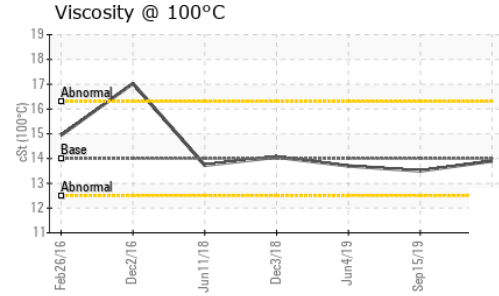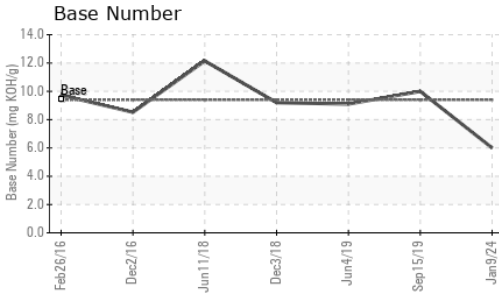

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 14	13.9	13.5	13.7

GRAPHS

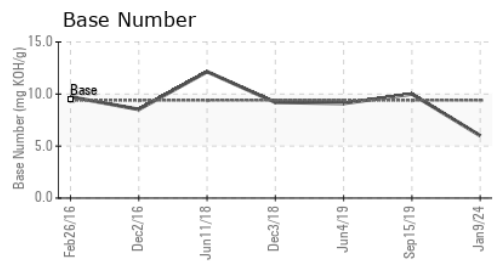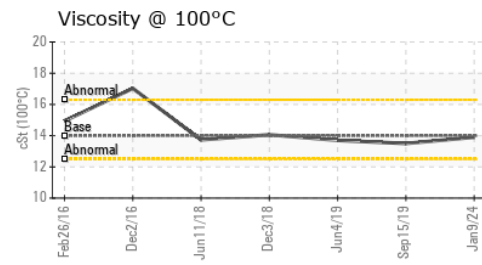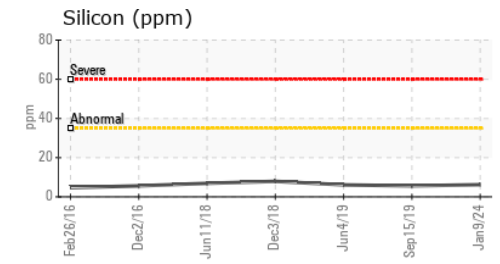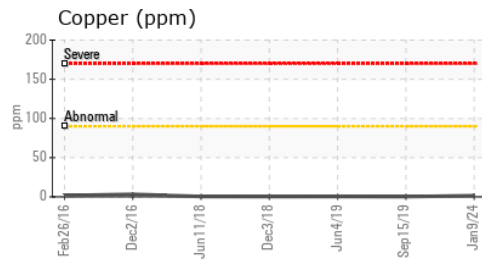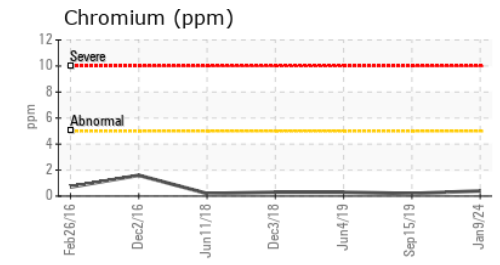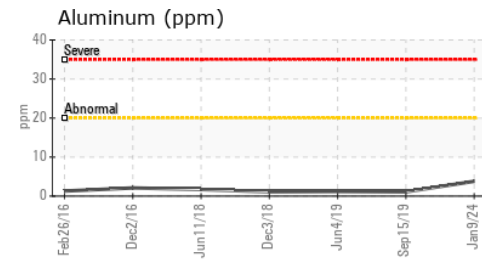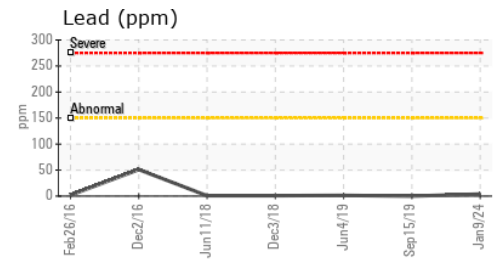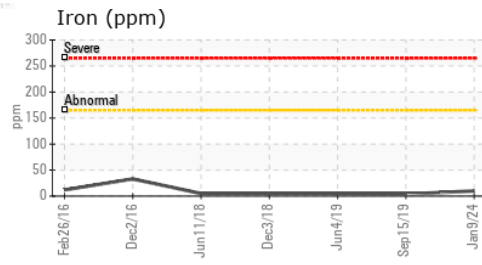

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : IL0012703 **Recieved** : 31 Jan 2024
Lab Number : 06075569 **Diagnosed** : 31 Jan 2024
Unique Number : 10857660 **Diagnostician** : Wes Davis
Test Package : MOB1+

RUSH TRUCK LEASING - SALT LAKE CITY IDEALEASE
 964 SOUTH 3800 WEST, BLDG B
 SALT LAKE CITY, UT
 US 84104
 Contact: JAY ALEXANDER
 AlexanderJ1@RushEnterprises.com
 T:
 F: (801)977-9381

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)