



OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area
{UNASSIGNED}
 Machine Id
WRRCHB-1 (S/N 17-103)
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 46 (375 GAL)



DIAGNOSIS

Recommendation

We recommend you service the filters on this component. Resample at the next service interval to monitor. (Customer Sample Comment: VI please. Fluid may be from 2017. Before filtering)

Wear

The copper level is abnormal. All other component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	WC0782787	---	---
Sample Date	Client Info	28 Jan 2024	---	---
Machine Age	hrs Client Info	40545	---	---
Oil Age	hrs Client Info	40545	---	---
Oil Changed	Client Info	Not Chngd	---	---
Sample Status		ABNORMAL	---	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.05	NEG	---	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >20	4	---	---
Chromium	ppm ASTM D5185m >20	<1	---	---
Nickel	ppm ASTM D5185m >20	0	---	---
Titanium	ppm ASTM D5185m	<1	---	---
Silver	ppm ASTM D5185m	0	---	---
Aluminum	ppm ASTM D5185m >20	0	---	---
Lead	ppm ASTM D5185m >20	0	---	---
Copper	ppm ASTM D5185m >20	▲ 54	---	---
Tin	ppm ASTM D5185m >20	<1	---	---
Vanadium	ppm ASTM D5185m	<1	---	---
Cadmium	ppm ASTM D5185m	0	---	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 5	0	---	---
Barium	ppm ASTM D5185m 5	0	---	---
Molybdenum	ppm ASTM D5185m 5	0	---	---
Manganese	ppm ASTM D5185m	<1	---	---
Magnesium	ppm ASTM D5185m 25	2	---	---
Calcium	ppm ASTM D5185m 200	10	---	---
Phosphorus	ppm ASTM D5185m 300	246	---	---
Zinc	ppm ASTM D5185m 370	201	---	---
Sulfur	ppm ASTM D5185m 2500	939	---	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >15	<1	---	---
Sodium	ppm ASTM D5185m	<1	---	---
Potassium	ppm ASTM D5185m >20	0	---	---

FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >1300	▲ 10346	---	---
Particles >6µm	ASTM D7647 >320	▲ 1497	---	---
Particles >14µm	ASTM D7647 >40	▲ 60	---	---
Particles >21µm	ASTM D7647 >10	▲ 12	---	---
Particles >38µm	ASTM D7647 >3	0	---	---
Particles >71µm	ASTM D7647 >3	0	---	---
Oil Cleanliness	ISO 4406 (c) >17/15/12	▲ 21/18/13	---	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g ASTM D8045 0.57	0.48	---	---



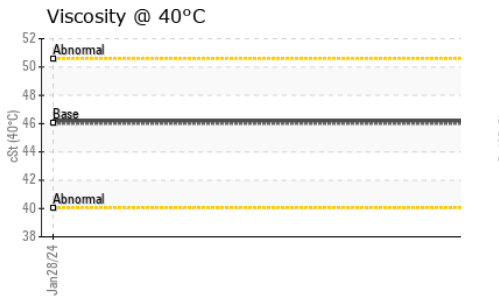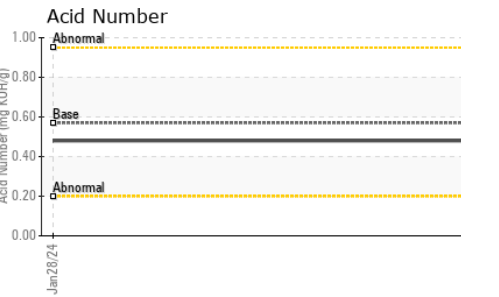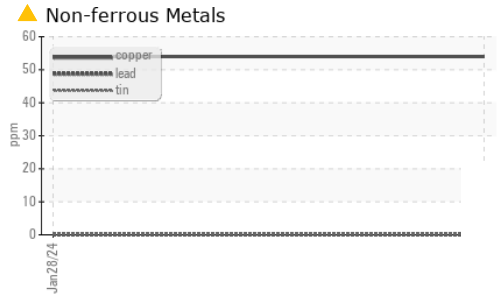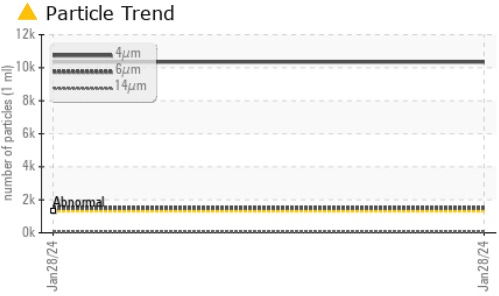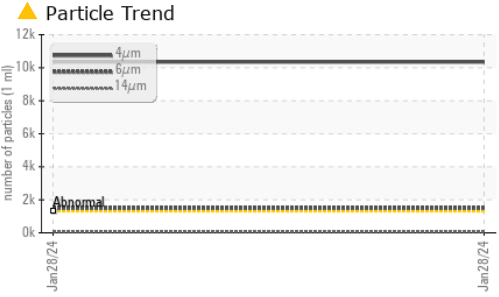

OIL ANALYSIS REPORT








VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46	46.2	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image
Bottom				no image	no image

GRAPHS

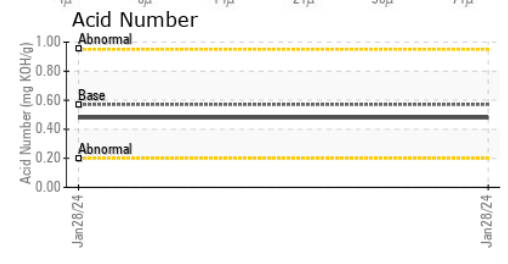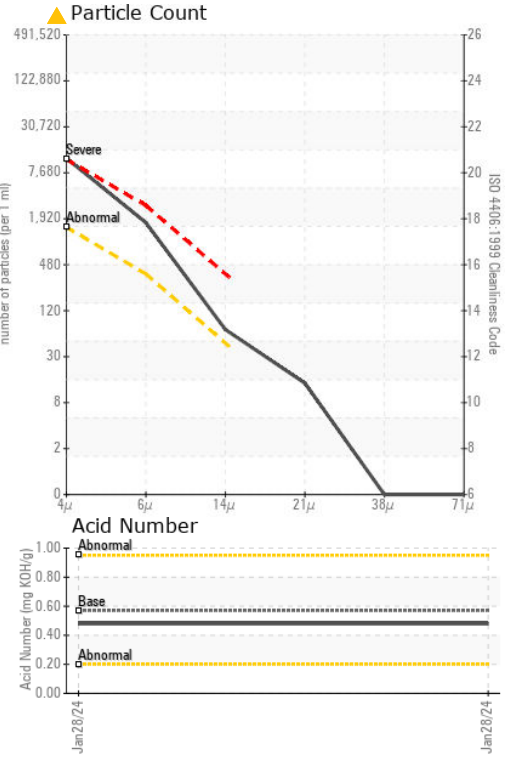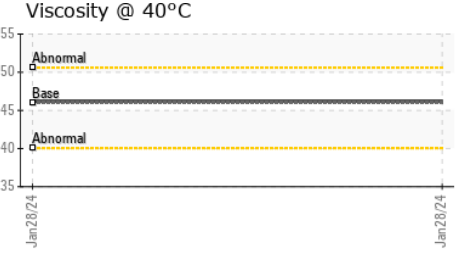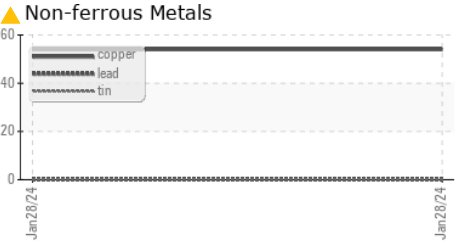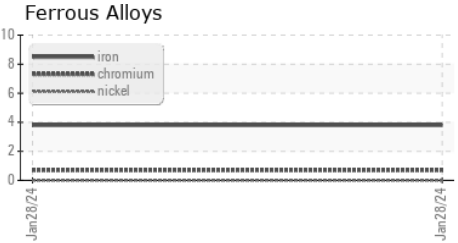

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0782787 **Received** : 31 Jan 2024
Lab Number : 06075681 **Diagnosed** : 01 Feb 2024
Unique Number : 10857772 **Diagnostician** : Don Baldrige
Test Package : IND 2

WEST SIDE SOLUTIONS
 4506 HWY 90
 CONWAY, SC
 US 29526-9631
 Contact: KEN ANDRE
 westsidesolutionsus@gmail.com
 T: (216)577-5014
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)