

OIL ANALYSIS REPORT

Sample Rating Trend

ISO

SUPREME 2TM125022

Hydrostatic Fluid {not provided} (--- GAL)

A Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of silt (particulates < 14 microns in size) present in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORM | MATION | method | limit/base | current | history1 | history2 |
|------------------|---------------|--------------|------------|----------------|--------------|-------------|
| Sample Number | | Client Info | | WC0737152 | | |
| Sample Date | | Client Info | | 28 Jan 2024 | | |
| Machine Age | hrs | Client Info | | 1388 | | |
| Oil Age | hrs | Client Info | | 0 | | |
| Oil Changed | | Client Info | | Changed | | |
| Sample Status | | | | ATTENTION | | |
| CONTAMINATIO | N | method | limit/base | current | history1 | history2 |
| Water | | WC Method | >0.1 | NEG | | |
| WEAR METALS | | method | limit/base | current | history1 | history2 |
| Iron | ppm | ASTM D5185m | >200 | 5 | | |
| Chromium | ppm | ASTM D5185m | >10 | 0 | | |
| Nickel | ppm | ASTM D5185m | | 0 | | |
| Titanium | ppm | ASTM D5185m | | <1 | | |
| Silver | ppm | ASTM D5185m | | 0 | | |
| Aluminum | ppm | ASTM D5185m | >50 | 0 | | |
| Lead | ppm | ASTM D5185m | >50 | 0 | | |
| Copper | ppm | ASTM D5185m | >200 | 1 | | |
| Tin | ppm | ASTM D5185m | >10 | <1 | | |
| Vanadium | ppm | ASTM D5185m | | <1 | | |
| Cadmium | ppm | ASTM D5185m | | <1 | | |
| ADDITIVES | | method | limit/base | current | history1 | history2 |
| Boron | ppm | ASTM D5185m | | 0 | | |
| Barium | ppm | ASTM D5185m | | 0 | | |
| Molybdenum | ppm | ASTM D5185m | | <1 | | |
| Manganese | ppm | ASTM D5185m | | <1 | | |
| Magnesium | ppm | ASTM D5185m | | 6 | | |
| Calcium | ppm | ASTM D5185m | | 43 | | |
| Phosphorus | ppm | ASTM D5185m | | 339 | | |
| Zinc | ppm | ASTM D5185m | | 407 | | |
| Sulfur | ppm | ASTM D5185m | | 1053 | | |
| CONTAMINANTS | ; | method | limit/base | current | history1 | history2 |
| Silicon | ppm | ASTM D5185m | >50 | <1 | | |
| Sodium | ppm | ASTM D5185m | | 1 | | |
| Potassium | ppm | ASTM D5185m | >20 | 0 | | |
| FLUID CLEANLIN | IESS | method | limit/base | current | history1 | history2 |
| Particles >4µm | | ASTM D7647 | >10000 | 10927 | | |
| Particles >6µm | | ASTM D7647 | >2500 | 3 511 | | |
| Particles >14µm | | ASTM D7647 | >320 | 244 | | |
| Particles >21µm | | ASTM D7647 | >80 | 37 | | |
| Particles >38µm | | ASTM D7647 | >20 | 0 | | |
| Particles >71µm | | ASTM D7647 | >4 | 0 | | |
| Oil Cleanliness | | ISO 4406 (c) | >20/18/15 | 1/19/15 | | |
| FLUID DEGRADA | ATION | method | limit/base | current | history1 | history2 |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 0.53 | | |
| :39:54) Rev: 1 | | | Contact | l ocation: SEB | /ICE MANAGER | R?-KINFORAB |

Report Id: KINFORAB [WUSCAR] 06075691 (Generated: 02/02/2024 11:39:54) Rev: 1

Contact/Location: SERVICE MANAGER ? - KINFORAB



🔺 Particle Trend

12

.10 1

8

61

4

2

0

12

Ê¹⁰

particles (1 8

6k

A.

0

0.60

(B/HO) E0.36

Ê 0.2

Pio 0.12

0.00

100

9


60

50 40 Jan 28/2

cSt (40°C) 80 70

particles (1

OIL ANALYSIS REPORT

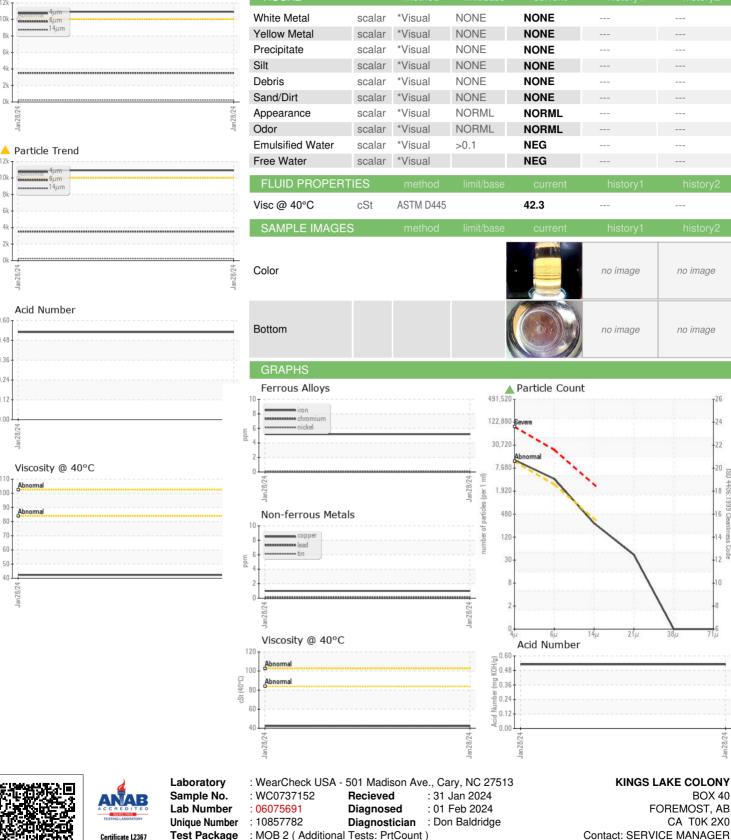

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

FOREMOST, AB CA TOK 2X0 Contact: SERVICE MANAGER littlejj.w3@gmail.com T: (403)867-2268 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

21µ

Contact/Location: SERVICE MANAGER ? - KINFORAB

BOX 40

no image

no imade

4406

:1999 Cle

14