

## **OIL ANALYSIS REPORT**

#### Sample Rating Trend

### NORMAL



Component **Reciprocating Compressor** TULCO LUBSOIL IND MP R&O 150 (--- GAL)

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

#### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.


)			<b>I</b>	lı		
SAMPLE INFORM	MATION	method	limit/base	Nov2021 May2022 Feb2023	history1	history2
Sample Number		Client Info		TO60000933	TO60000939	TO60000937
Sample Date		Client Info		10 Jan 2024	11 Dec 2023	03 Aug 2023
Machine Age	wks	Client Info		0	0	0
Oil Age	wks	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ATTENTION	NORMAL
WEAR METALS		method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>50	0	0	<1
Chromium	ppm	ASTM D5185m	>10	0	<1	0
Nickel	ppm	ASTM D5185m		0	0	0
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	0	1	<1
_ead	ppm	ASTM D5185m	>25	0	0	0
Copper	ppm	ASTM D5185m	>50	<1	1	1
Tin	ppm	ASTM D5185m	>15	<1	<1	0
Vanadium	ppm	ASTM D5185m		<1	0	<1
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m		0	10	0
Volybdenum	ppm	ASTM D5185m		0	0	0
Vanganese	ppm	ASTM D5185m		<1	0	<1
Vagnesium	ppm	ASTM D5185m	0	0	2	3
Calcium	ppm	ASTM D5185m	0	0	1	0
Phosphorus	ppm	ASTM D5185m	0	29	32	32
Zinc	ppm	ASTM D5185m	0	0	9	15
Sulfur	ppm	ASTM D5185m	2400	2187	2889	2803
CONTAMINANTS	8	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	12	6
Sodium	ppm	ASTM D5185m		1	0	1
Potassium	ppm	ASTM D5185m	>20	<1	2	0
Water	%	ASTM D6304	>0.1	0.012	0.004	0.022
opm Water	ppm	ASTM D6304	>1000	127	43	224.0
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>10000	1448	▲ 18052	8645
Particles >6µm		ASTM D7647	>2500	292	▲ 3302	2305
· Particles >14µm		ASTM D7647	>320	11	89	107
Particles >21µm		ASTM D7647		4	12	18
Particles >38µm		ASTM D7647	>20	0	0	2
Particles >71µm		ASTM D7647		0	0	1
Oil Cleanliness		ISO 4406 (c)	>20/18/15	18/15/11	▲ 21/19/14	20/18/14
FLUID DEGRADA	ATION	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.17	0.10	0.21
					0.10	





# **OIL ANALYSIS REPORT**


Color


Bottom

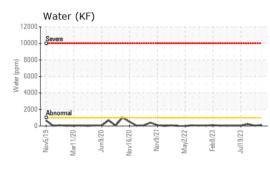

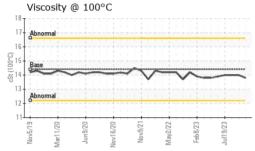


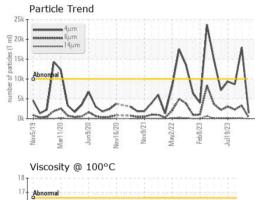





VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG
FLUID PROPERT	IES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	150	133	140	140
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	14.0	14.0
Viscosity Index (VI)	Scale	ASTM D2270	92	99	96	96
SAMPLE IMAGES		method	limit/base	current	history1	history2

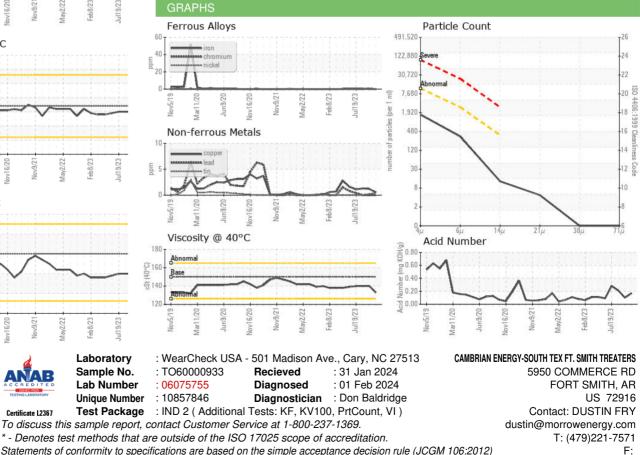

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Certificate L2367

Submitted By: BRANDON HUTCHERSON