


OIL ANALYSIS REPORT

Sample Rating Trend

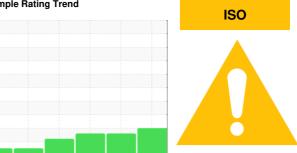

Machine Id KAESER AS 25T 6000660 (S/N 1425)

Compressor

KAESER SIGMA (OEM) M-460 (--- GAL)

DIAGNOSIS

Recommendation

The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

All component wear rates are normal.

Contamination

There is a high amount of particulates present in the oil.


Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

		Jul2018	Aug2019 Jan2021	Mar2022 Jul2023	Jan 2024	
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		KCPA010363	KCPA003254	KCP42032
Sample Date		Client Info		18 Jan 2024	13 Jul 2023	27 Mar 2022
Machine Age	hrs	Client Info		19468	17956	13562
Oil Age	hrs	Client Info		0	0	4204
Oil Changed		Client Info		N/A	N/A	Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL
WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<1	<1	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>3	0	0	0
Titanium	ppm	ASTM D5185m	>3	<1	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>10	<1	0	<1
Lead	ppm	ASTM D5185m	>10	0	0	0
Copper	ppm	ASTM D5185m	>50	2	8	4
Tin	ppm	ASTM D5185m	>10	- <1	0	<1
Antimony	ppm	ASTM D5185m				
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	0	0	0
Barium	ppm	ASTM D5185m	90	11	0	0
Molybdenum	ppm	ASTM D5185m	0	0	0	0
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	100	64	13	54
Calcium	ppm	ASTM D5185m	0	0	0	0
Phosphorus	ppm	ASTM D5185m	0	4	0	6
Zinc	ppm	ASTM D5185m	0	7	11	30
Sulfur	ppm	ASTM D5185m	23500	17298	20894	16145
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	nnm	ASTM D5185m	>25	<1	<1	<1
Sodium	ppm	ASTM D5185m	725	9	0	12
Potassium	ppm		>20	9 <1	<1	2
Water	ppm %	ASTM D5185m ASTM D6304	>20 >0.05	0.022	0.019	0.008
ppm Water	ppm	ASTM D6304	>50.05	228	197.4	87.3
FLUID CLEANLIN		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		55043	3648	10720
Particles >6µm		ASTM D7647	>1300	22949	<u> 1751</u>	<u></u> ∆ 5606
Particles >14µm		ASTM D7647	>80	<u> </u>	▲ 329	<u>^</u> 760
Particles >21µm		ASTM D7647		<u>▲</u> 1291	<u> 107</u>	<u>▲</u> 160
·		ASTM D7647	>4	<u> </u>	4	<u> </u>
Particles >38um			-			
Particles >38µm Particles >71um		ASTM D7647	>3	1	0	0
Particles >38µm Particles >71µm Oil Cleanliness		ASTM D7647 ISO 4406 (c)	>3 >/17/13	1 <u>23/22/19</u>	0 1 9/18/16	0 ▲ 20/17
Particles >71µm	TION					



OIL ANALYSIS REPORT

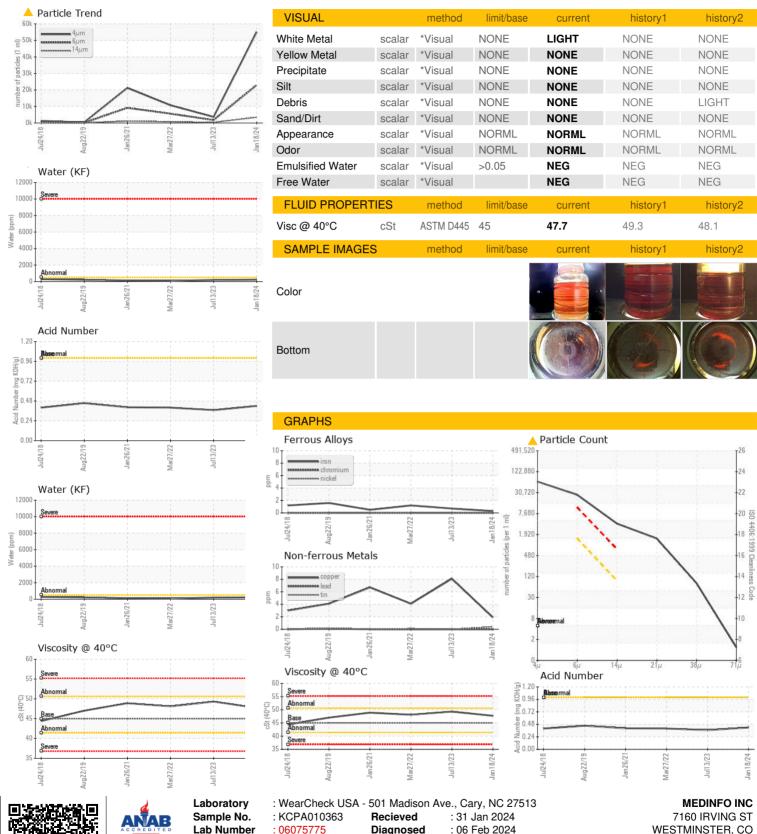





Lab Number **Unique Number**

: 06075775 : 10857866

Diagnosed

Diagnostician : Jonathan Hester

Test Package : IND 2 (Additional Tests: KF, PrtCount) Certificate L2367 To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

WESTMINSTER, CO US 80030

Contact: Service Manager gleason@medinfo.com

T: F: