


OIL ANALYSIS REPORT

Sample Rating Trend

DIRT



Machine Id
CATERPILLAR 980M 6161 (S/N MK210767)
Component
Hydraulic System
Fluid
TULCO LUBSOIL SUPER HYDRAULIC AW 46 (--- GAL)

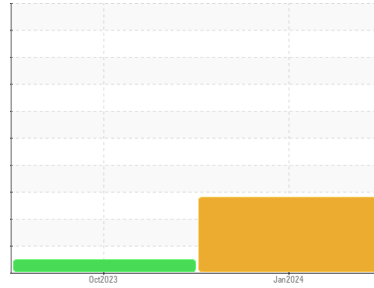

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

▲ Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil. Elemental level of silicon (Si) above normal.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		TO10003032	TO10002787	---
Sample Date	Client Info		26 Jan 2024	18 Oct 2023	---
Machine Age	hrs	Client Info	8990	8534	---
Oil Age	hrs	Client Info	756	300	---
Oil Changed	Client Info		Not Chngd	Not Chngd	---
Sample Status			ABNORMAL	NORMAL	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >20	10	4	---
Chromium	ppm	ASTM D5185m >20	<1	<1	---
Nickel	ppm	ASTM D5185m >20	2	<1	---
Titanium	ppm	ASTM D5185m	<1	<1	---
Silver	ppm	ASTM D5185m	0	0	---
Aluminum	ppm	ASTM D5185m >20	2	2	---
Lead	ppm	ASTM D5185m >20	<1	<1	---
Copper	ppm	ASTM D5185m >20	4	5	---
Tin	ppm	ASTM D5185m >20	<1	0	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	<1	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	0	---
Barium	ppm	ASTM D5185m	0	10	---
Molybdenum	ppm	ASTM D5185m	3	<1	---
Manganese	ppm	ASTM D5185m	<1	0	---
Magnesium	ppm	ASTM D5185m	84	7	---
Calcium	ppm	ASTM D5185m	2225	180	---
Phosphorus	ppm	ASTM D5185m 450	821	675	---
Zinc	ppm	ASTM D5185m 540	990	947	---
Sulfur	ppm	ASTM D5185m 1825	3235	1840	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >15	▲ 40	5	---
Sodium	ppm	ASTM D5185m	3	0	---
Potassium	ppm	ASTM D5185m >20	<1	2	---
Water	%	ASTM D6304 >0.05	NEG	NEG	---






FLUID CLEANLINESS

	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>5000	▲ 77838	4964	---
Particles >6µm	ASTM D7647	>1300	▲ 2470	461	---
Particles >14µm	ASTM D7647	>160	14	24	---
Particles >21µm	ASTM D7647	>40	2	6	---
Particles >38µm	ASTM D7647	>10	0	0	---
Particles >71µm	ASTM D7647	>3	0	0	---
Oil Cleanliness	ISO 4406 (c)	>19/17/14	▲ 23/18/11	19/16/12	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 .7	1.17	0.70	---


OIL ANALYSIS REPORT

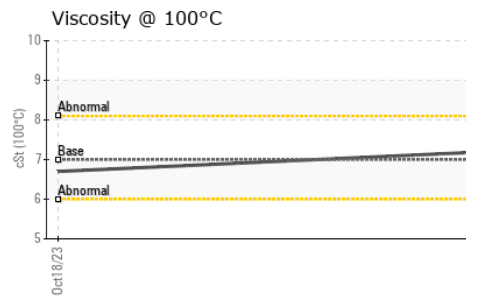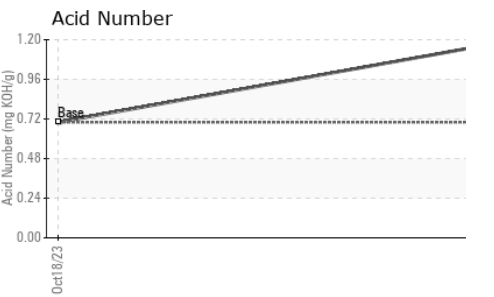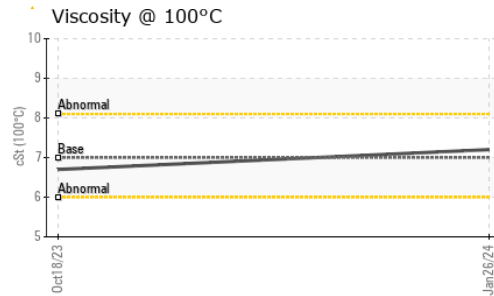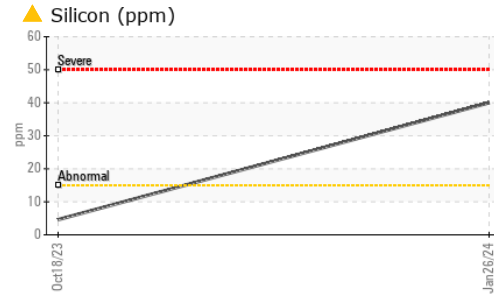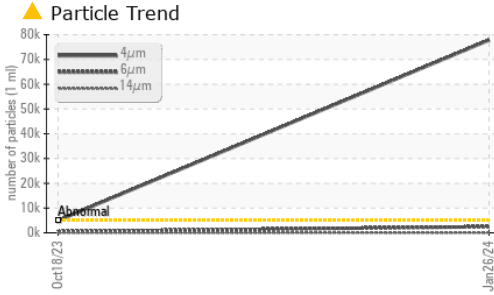






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	49.6	41.2
Visc @ 100°C	cSt	ASTM D445	7	7.2	6.7
Viscosity Index (VI)	Scale	ASTM D2270	109	103	117

SAMPLE IMAGES

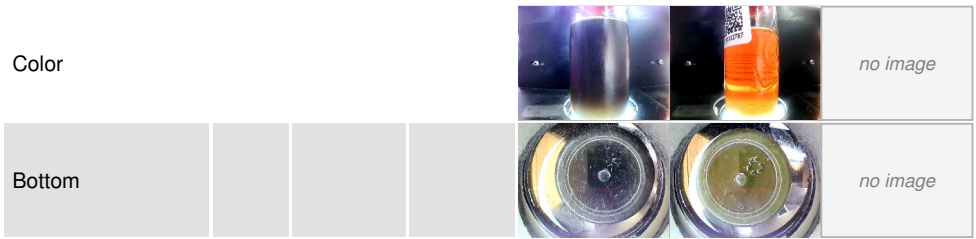

GRAPHS

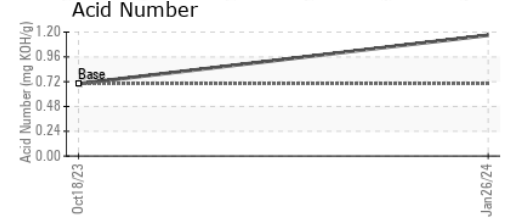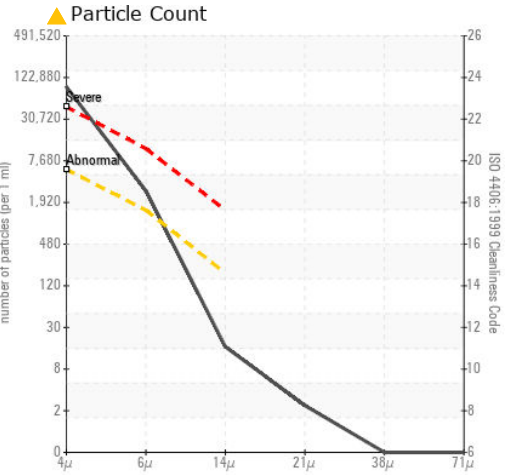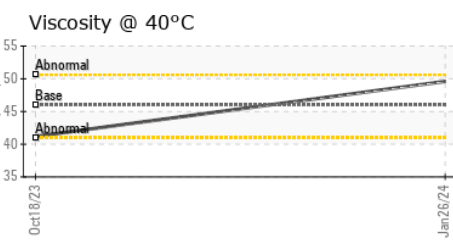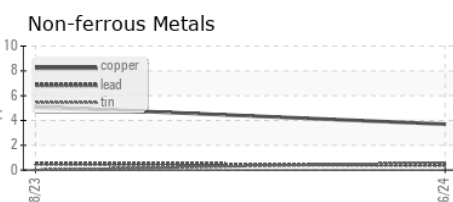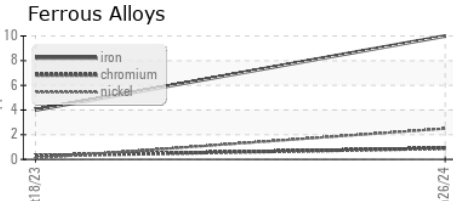

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003032 **Received** : 31 Jan 2024
Lab Number : 06076369 **Diagnosed** : 02 Feb 2024
Unique Number : 10858460 **Diagnostician** : Don Baldrige
Test Package : MOB 2 (Additional Tests: KF, KV100, VI)

ANCHOR STONE TULSA ROCK
 TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
 TULSA, OK
 US 74137
 Contact: MIKE SNYDER
 msnyder@anchorstoneco.com
 T: (417)850-9635
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)